

# CABLINE®-CA II PLUS

풀 실드, 메카니컬 록 포함, 고속 전송 대응, 0.4mm피치, 수평 결합 타입 세션 동축 커넥터

\*더욱 고속 64 Gbps PAM4에는 CABLINE-CA II PLUS 리셉터클(20790-060E-01/-02)과 결합하는 CABLINE-CA IIP PLUS 하네스 솔루션을 확인하십시오.

**Product Specifications:**


Mating type		Horizontal
Board Pitch (mm)		0.4
Wiping Length (mm)		0.54
Mated size (mm)	Height	1.2 max. with cover
	Width	Formula: 6.95 + (0.4*?p)
	Depth	6.7
Pin Counts	Range	Up to 60
	Available	60

**Applicable Cable Size:**

Maximum O.D. (mm)	0.4
Micro-Coaxial for Signal (AWG)	45 ohm: #38 or smaller 50 ohm: #40 or smaller
Twinax (AWG)	#40, #42
Discrete (AWG)	#34 or smaller


**Applicable Standards (Reference Only):**

USB4 Gen3/Thunderbolt 4 (20 Gbps/lane), PCIe® Gen 4 (16 GT/s), eDP HBR 3 (8.1 Gbps)

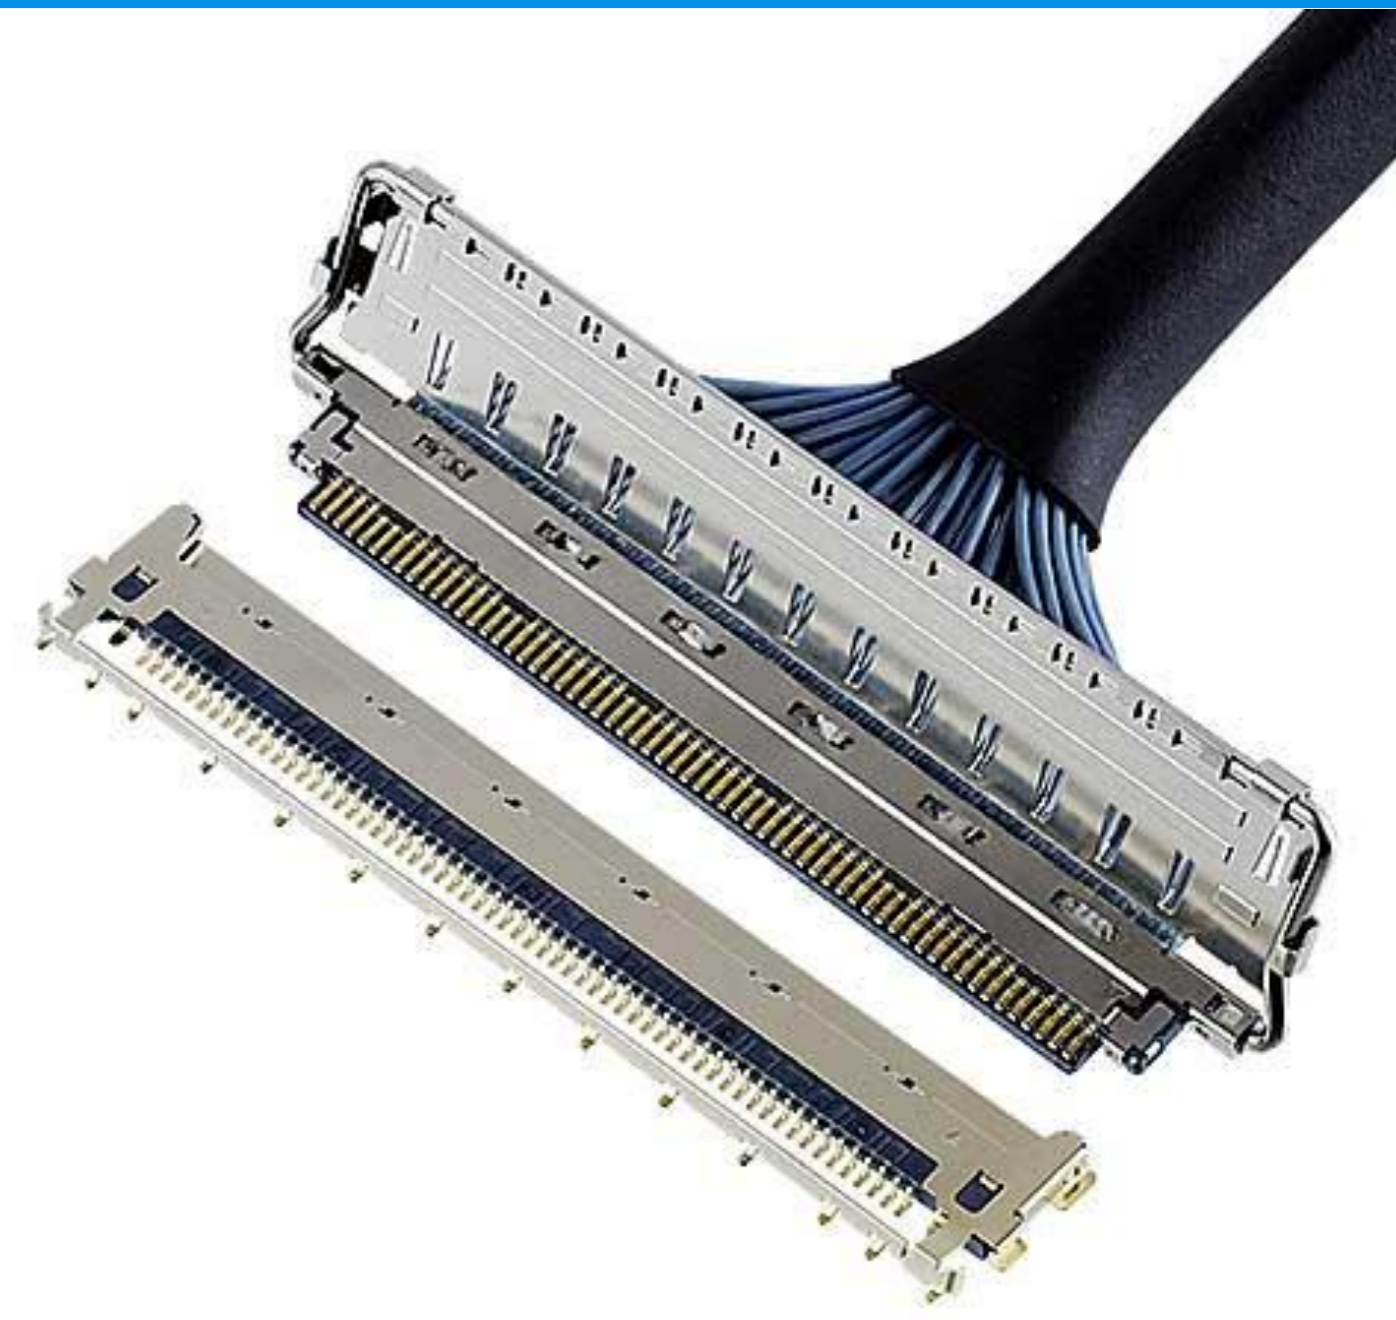


\*기재가 되어있지 않은 핀 수의 대응 여부에 대해서는 문의해 부탁드립니다.  
\* CABLINE-CA II (협소 공간 타입)에서는 20, 30, 40, 50p의 핀 수도 준비되어 있습니다.


## ▶ ZenShield® 풀 실드와 다중 접점 그라운드 구조로 EMI 대책 강화

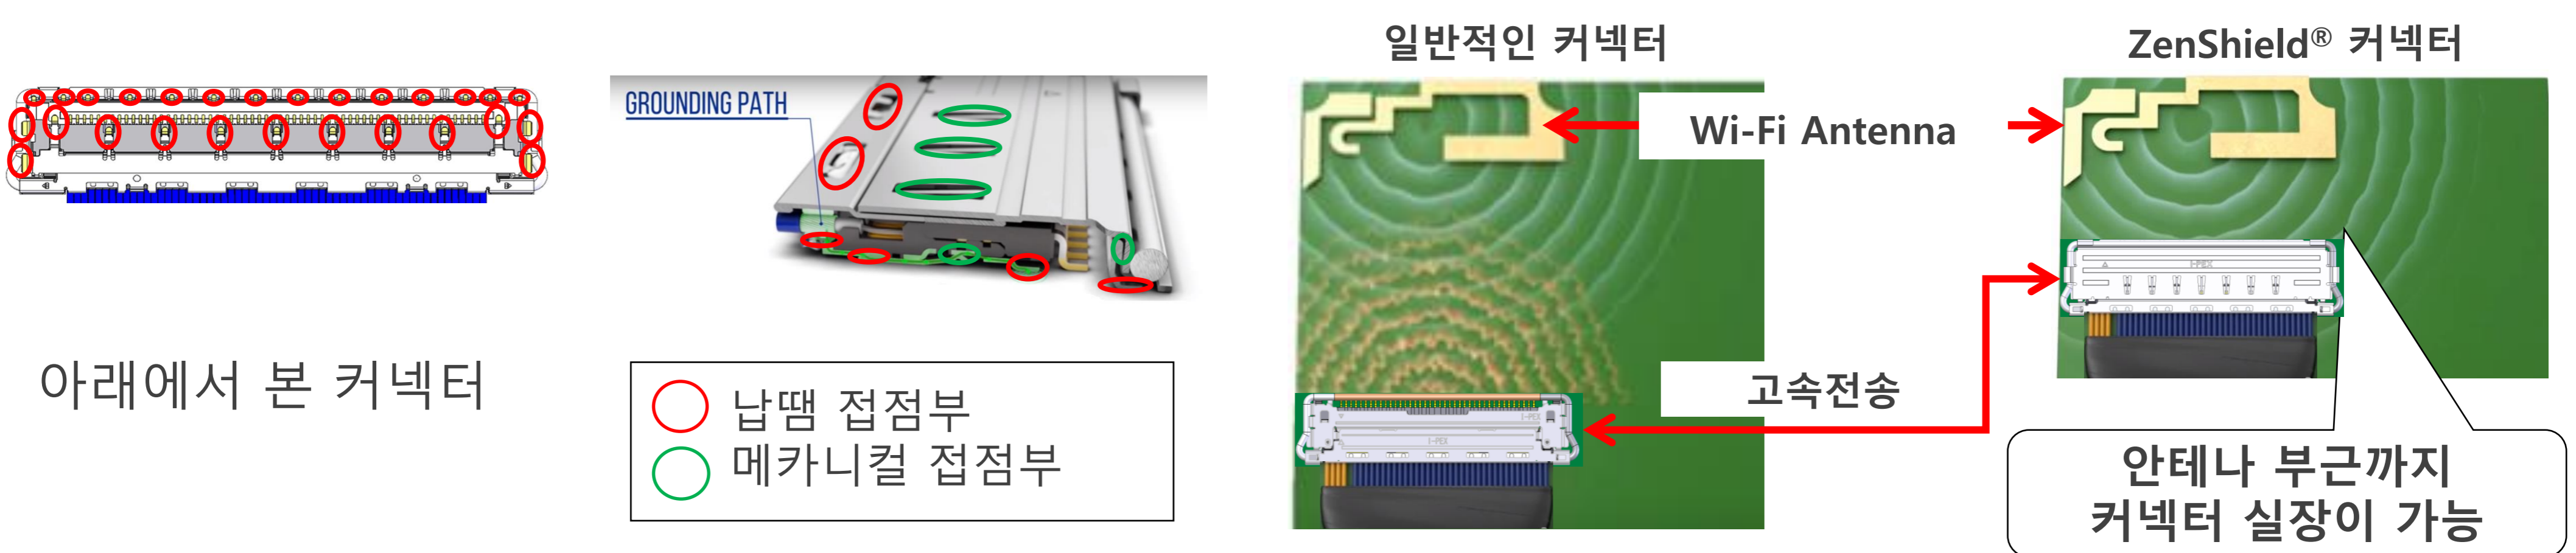

## ▶ 메카니컬 록 바를 통한 불완전 결합 방지와 플러그 빠짐 방지


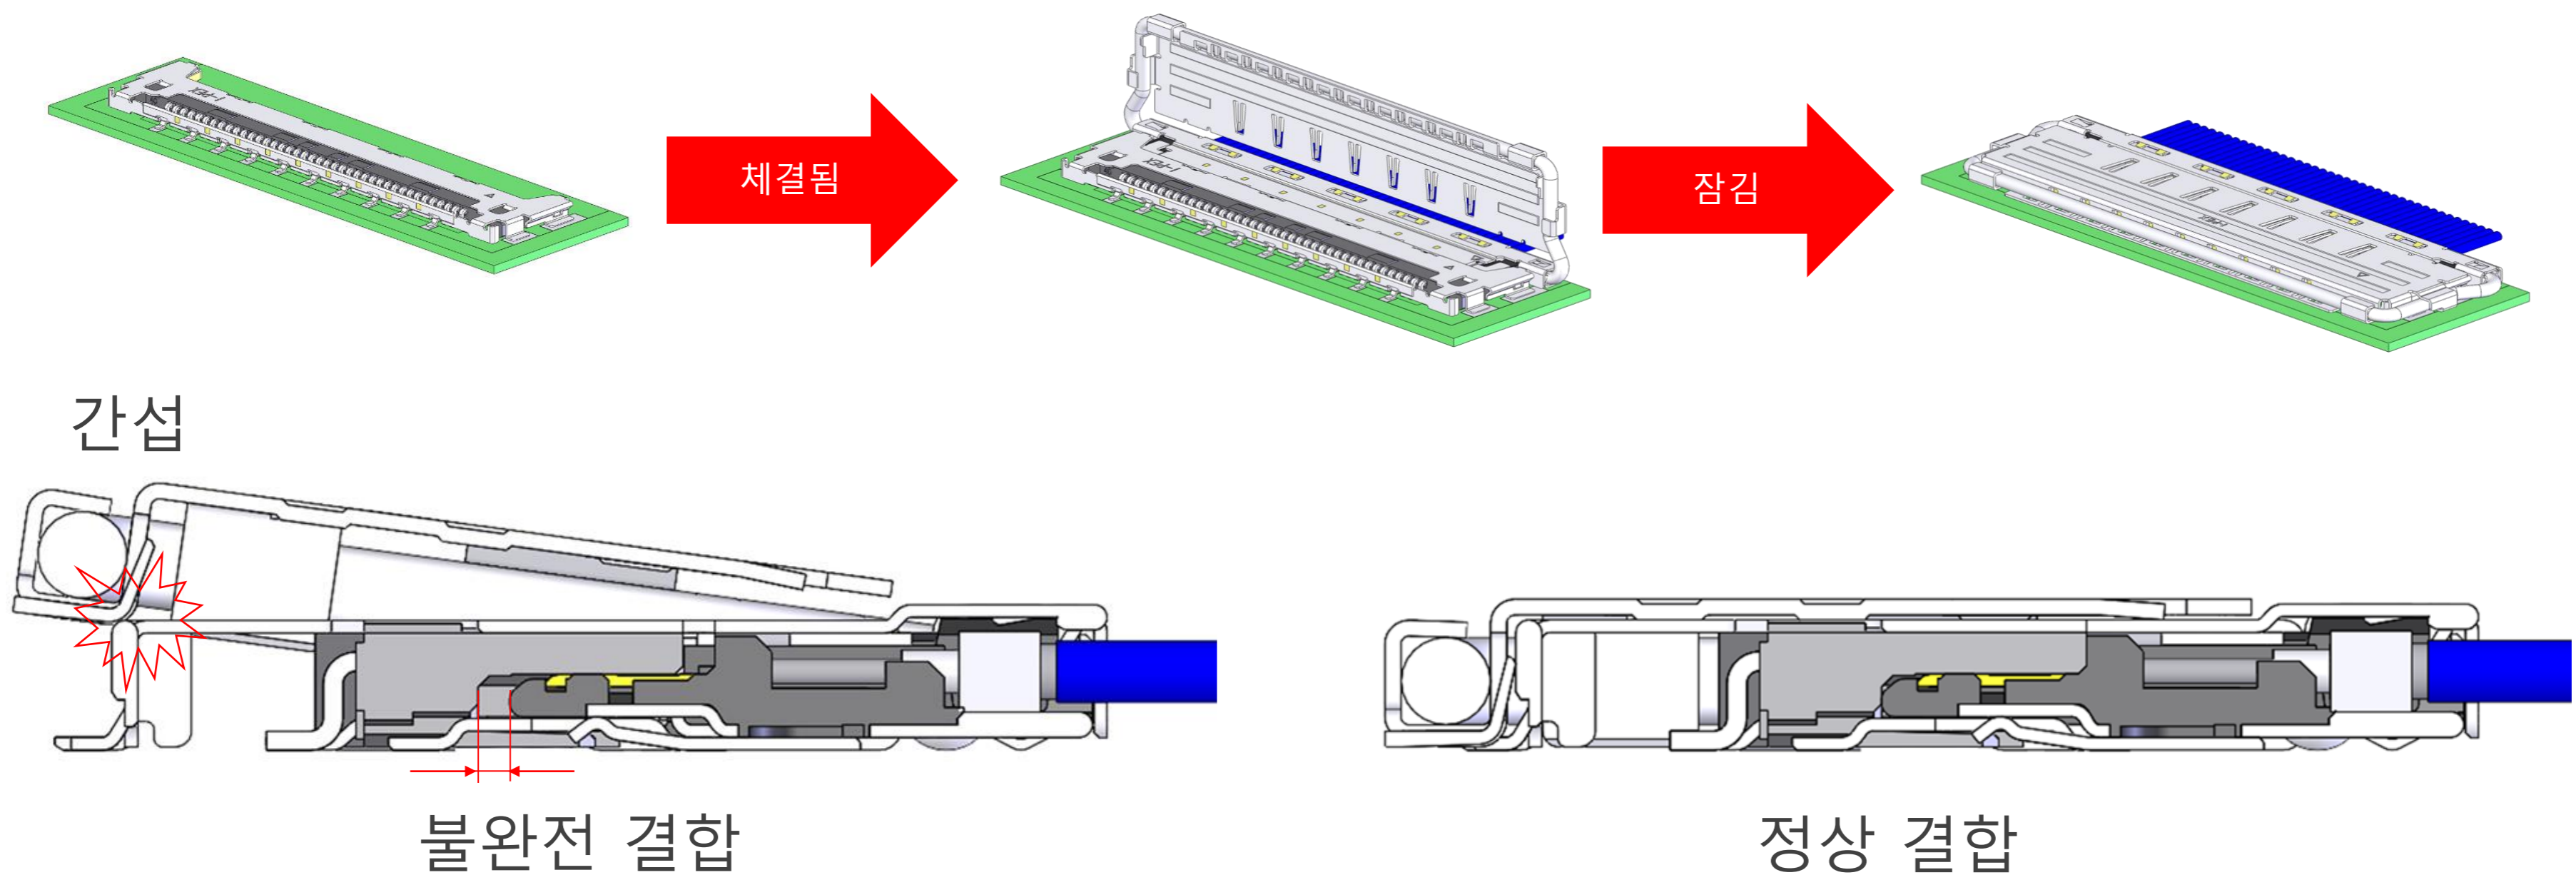


## ▶ 리셉터클 실드 안쪽에 VIA를 형성할 수 있는 공간 확보

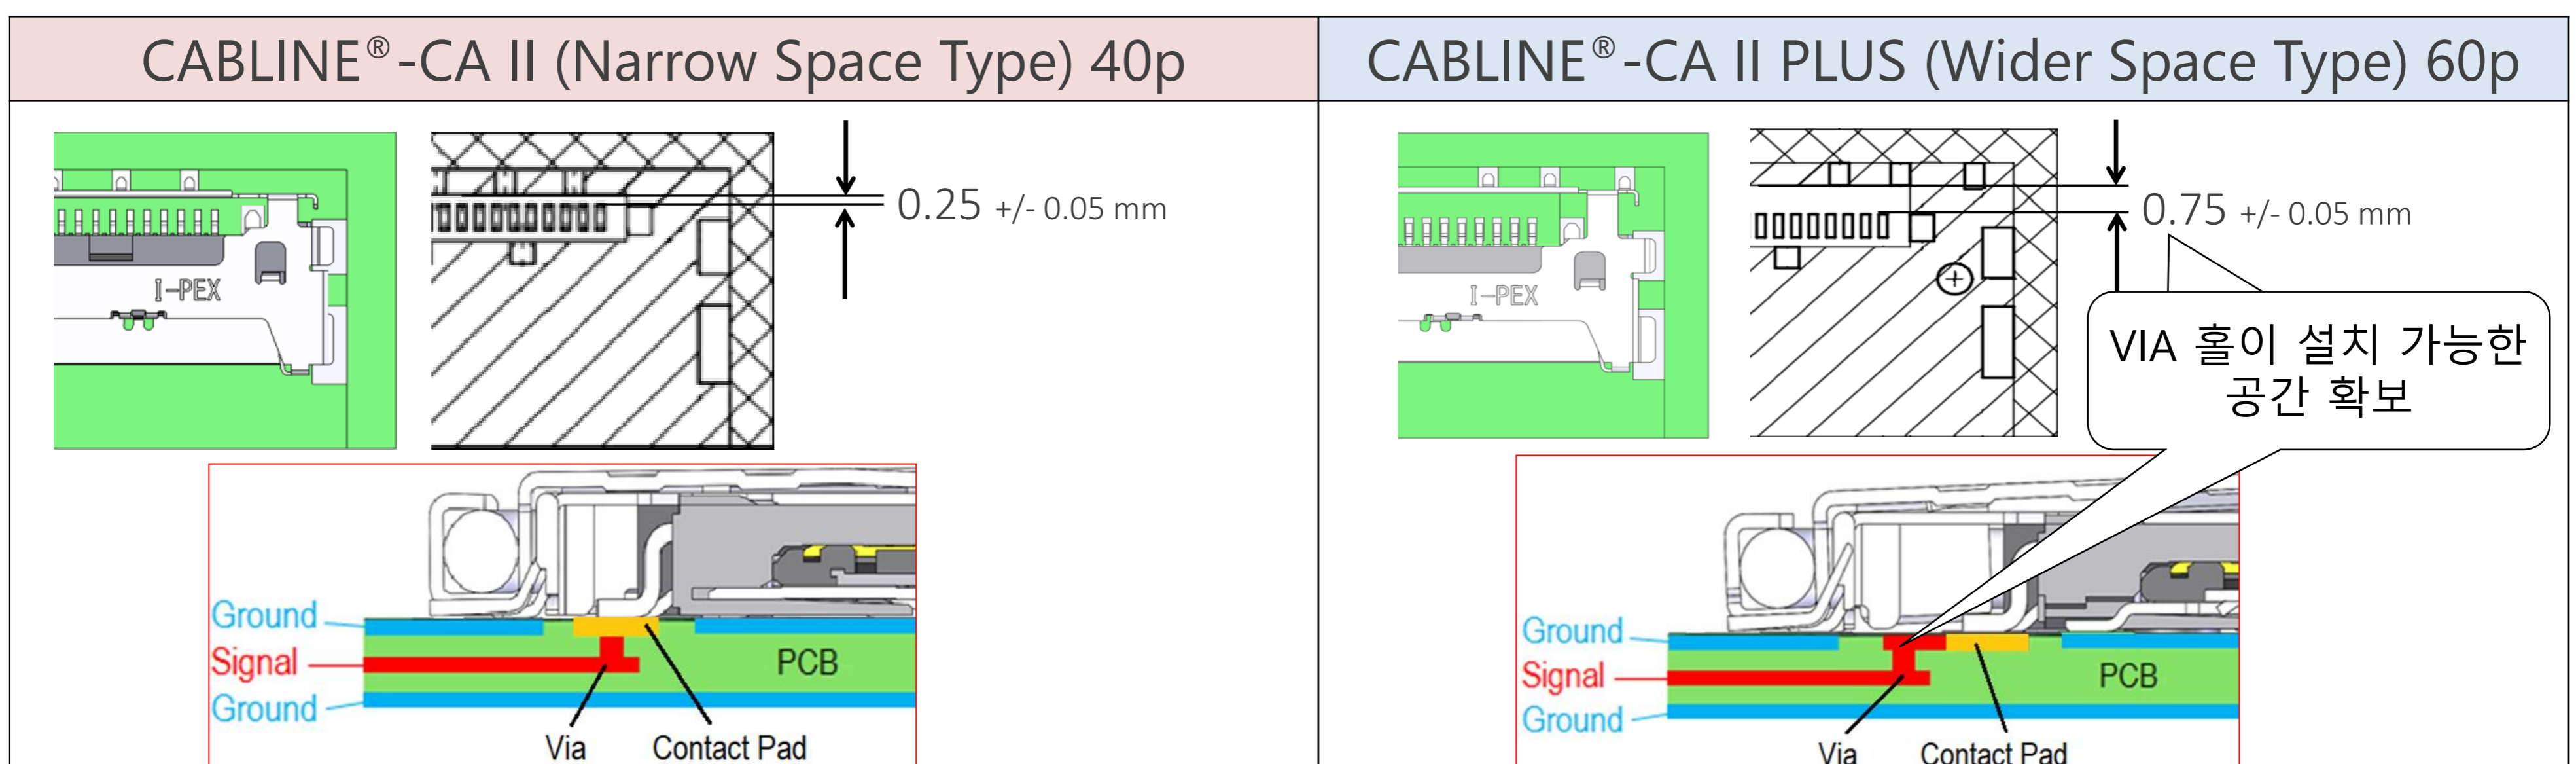


# Component Parts Details

## Component Parts


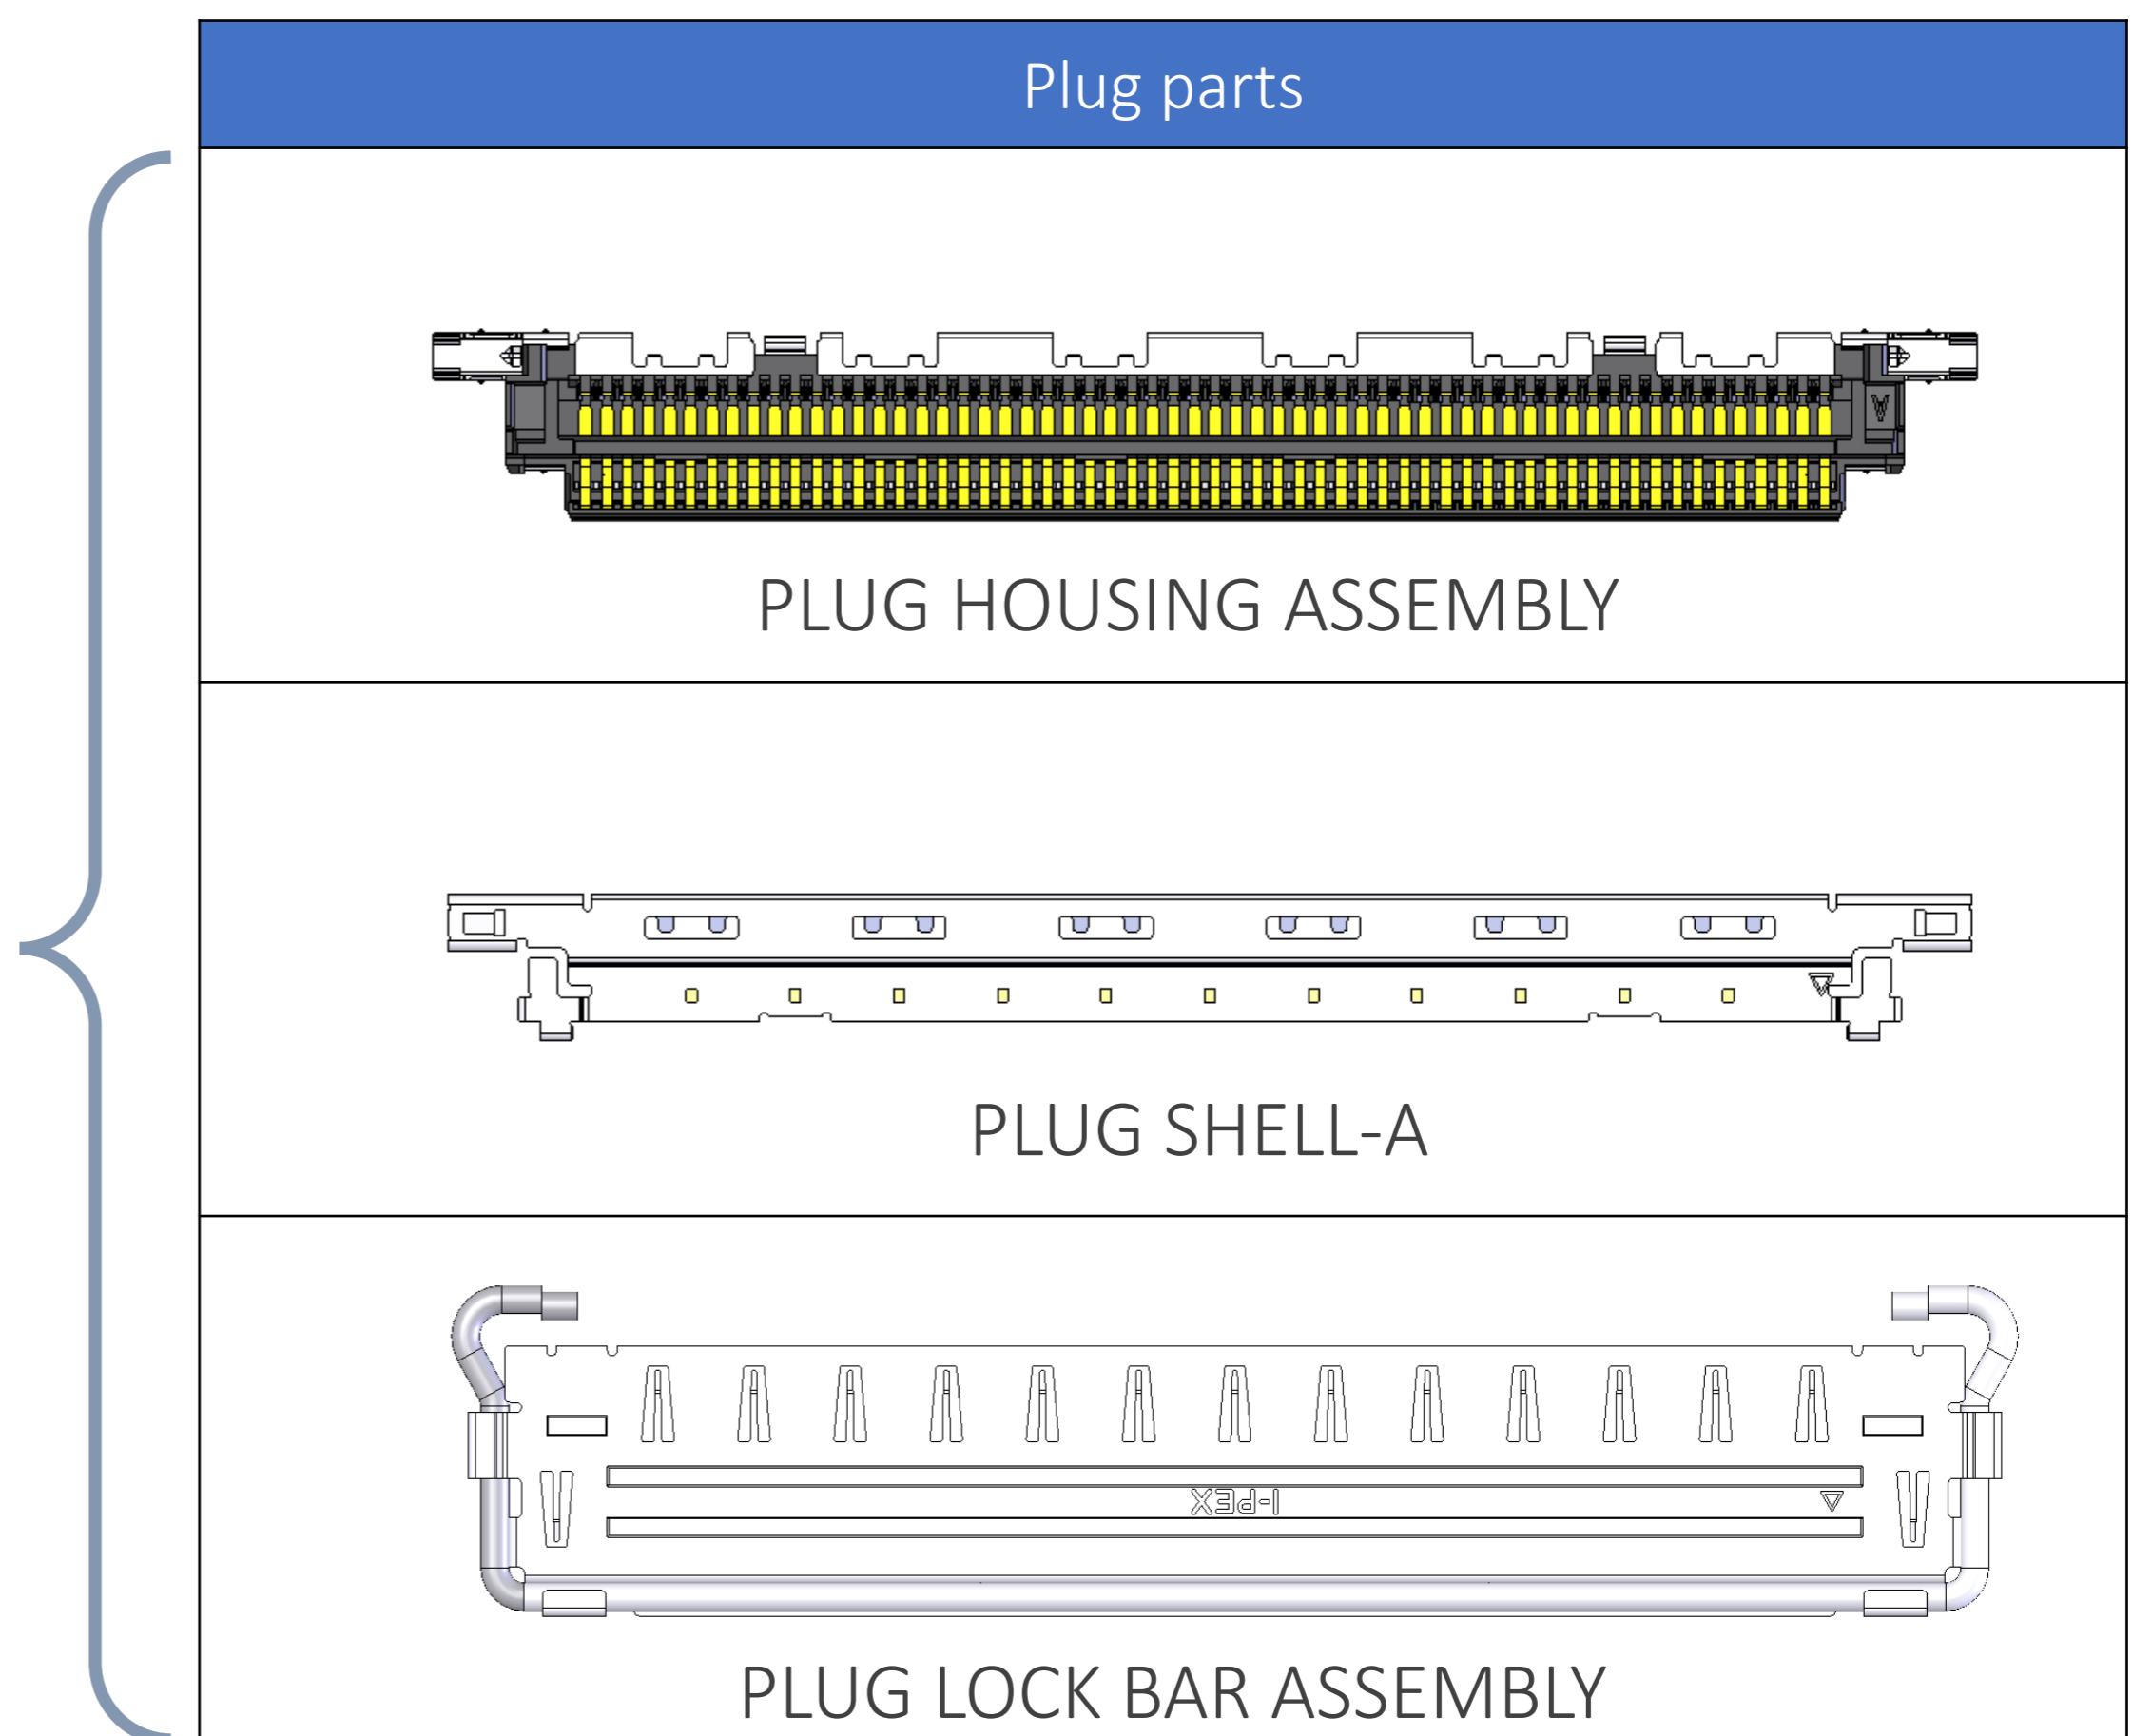
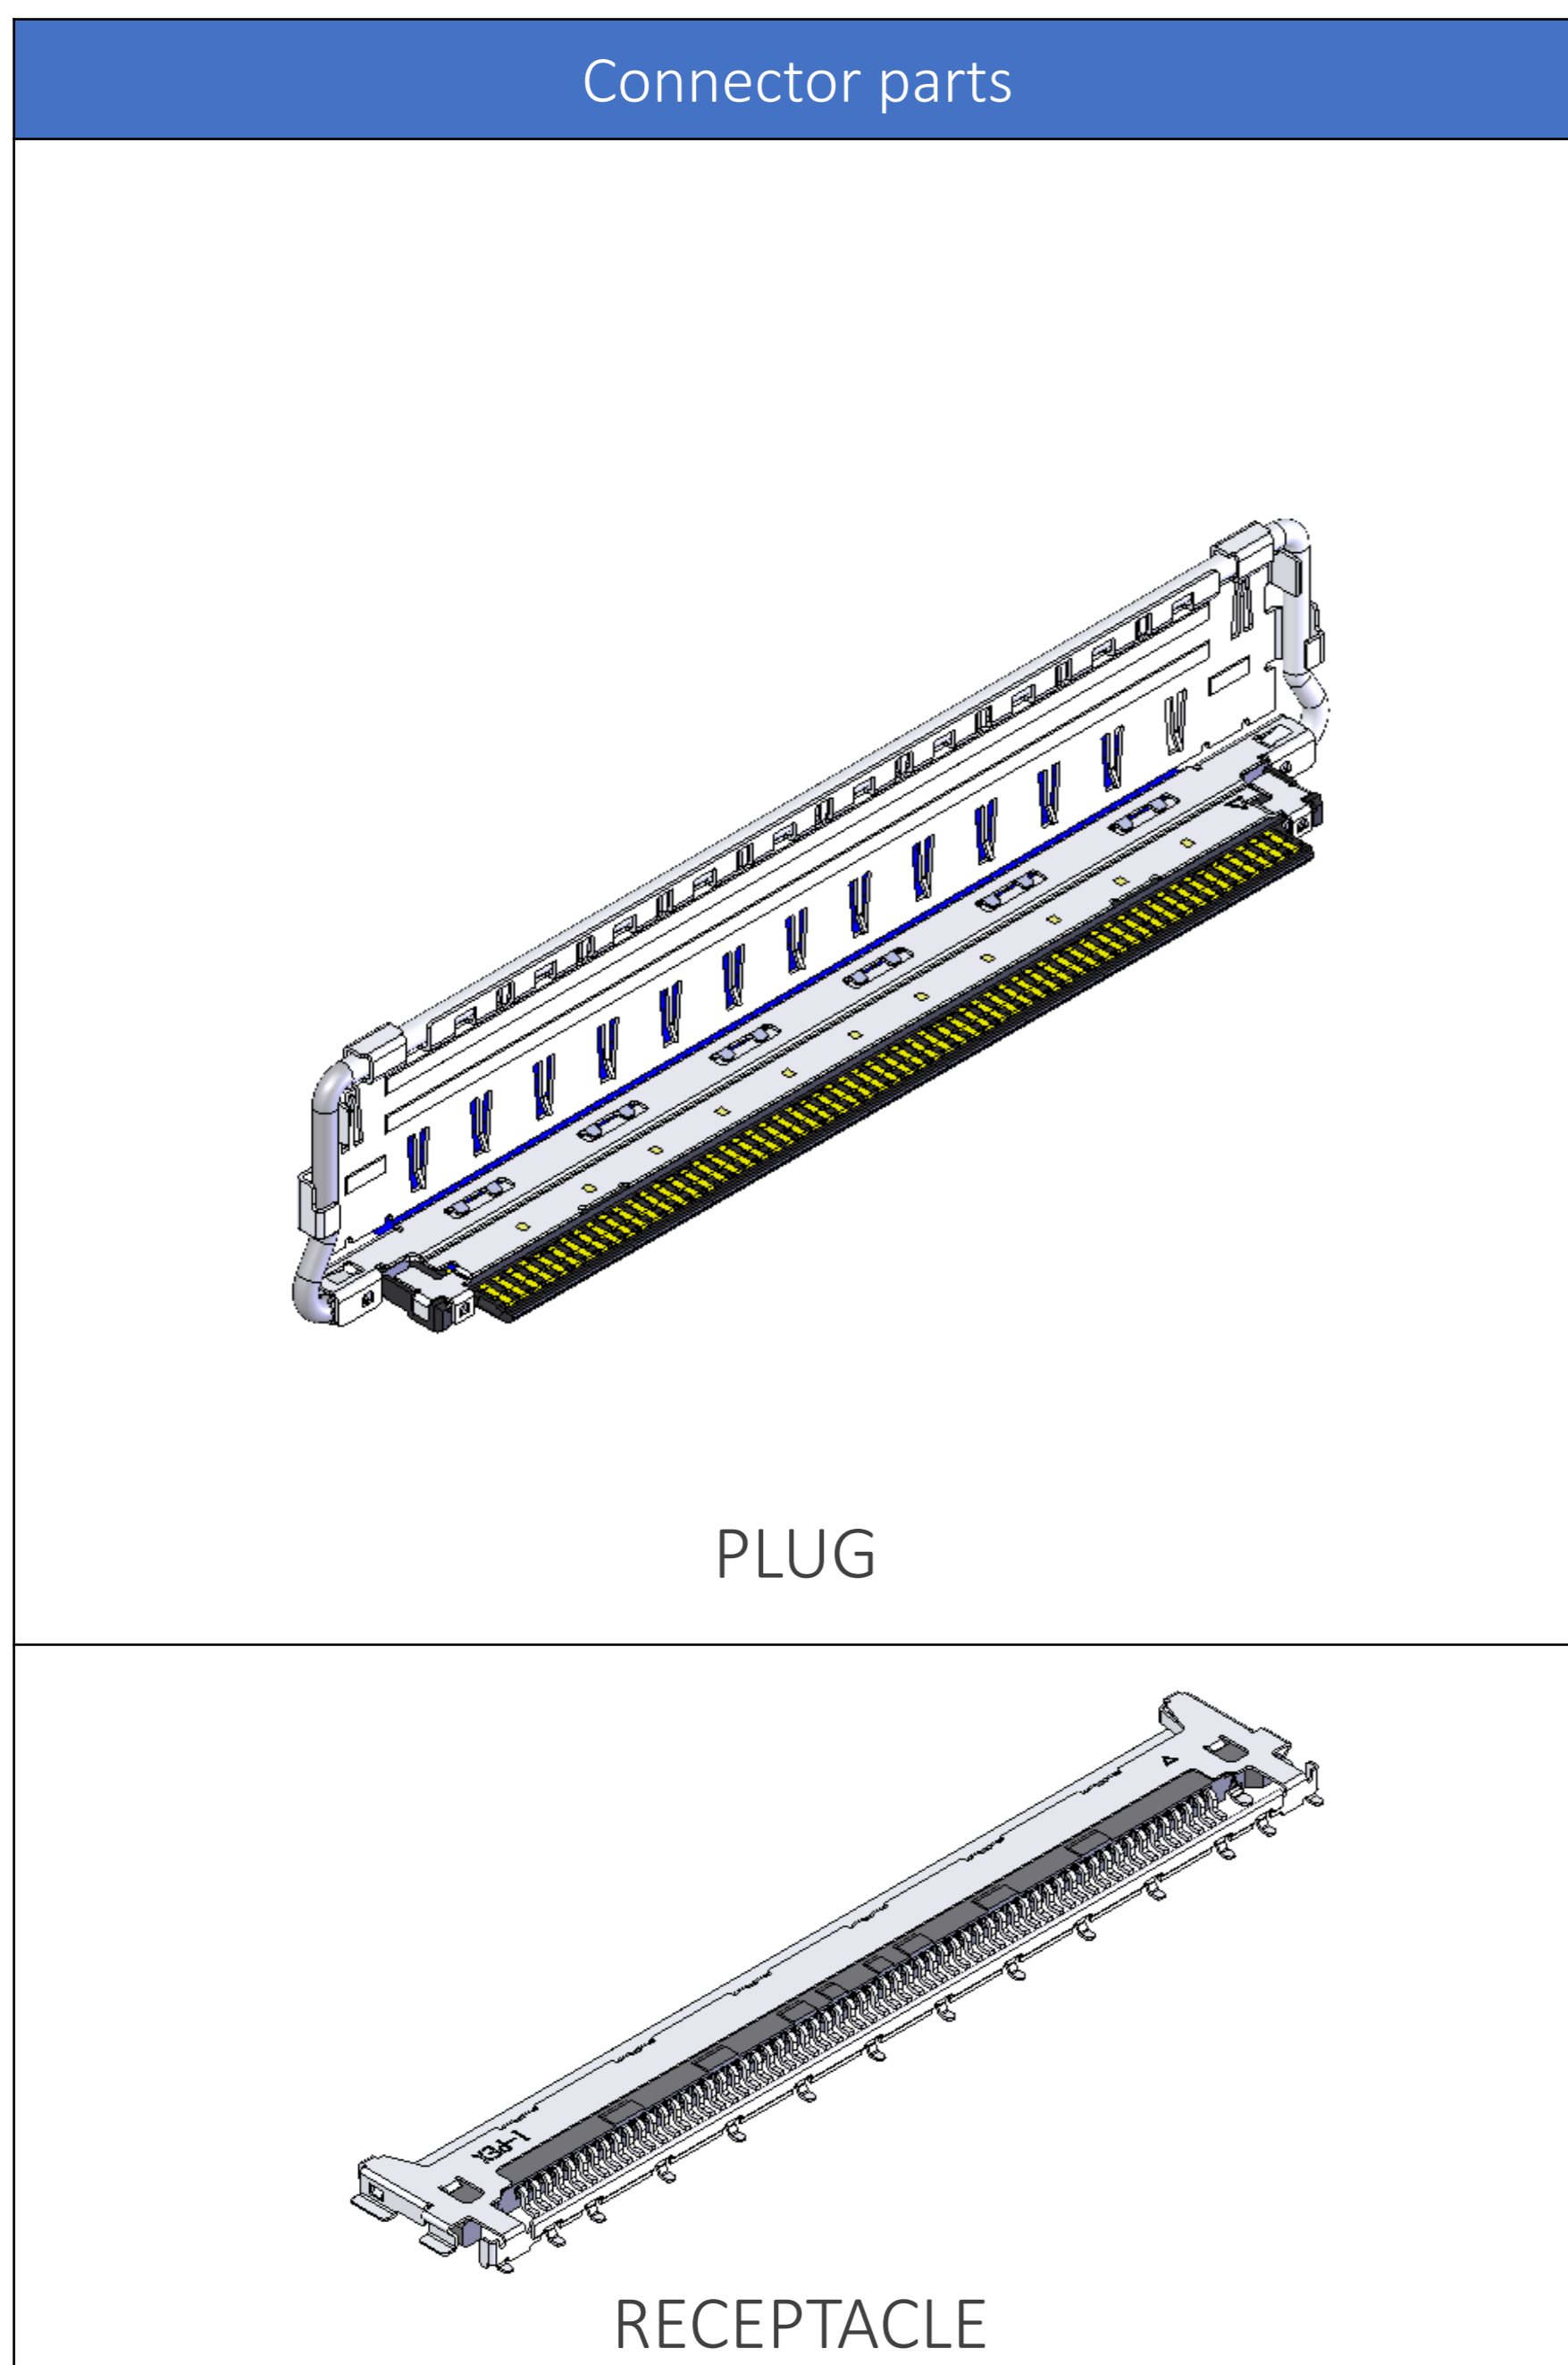


# Plug for Cable Assembly

Recommended P/N	20788-0**T-01
PART NO.	Pos.
20788-060T-01	60

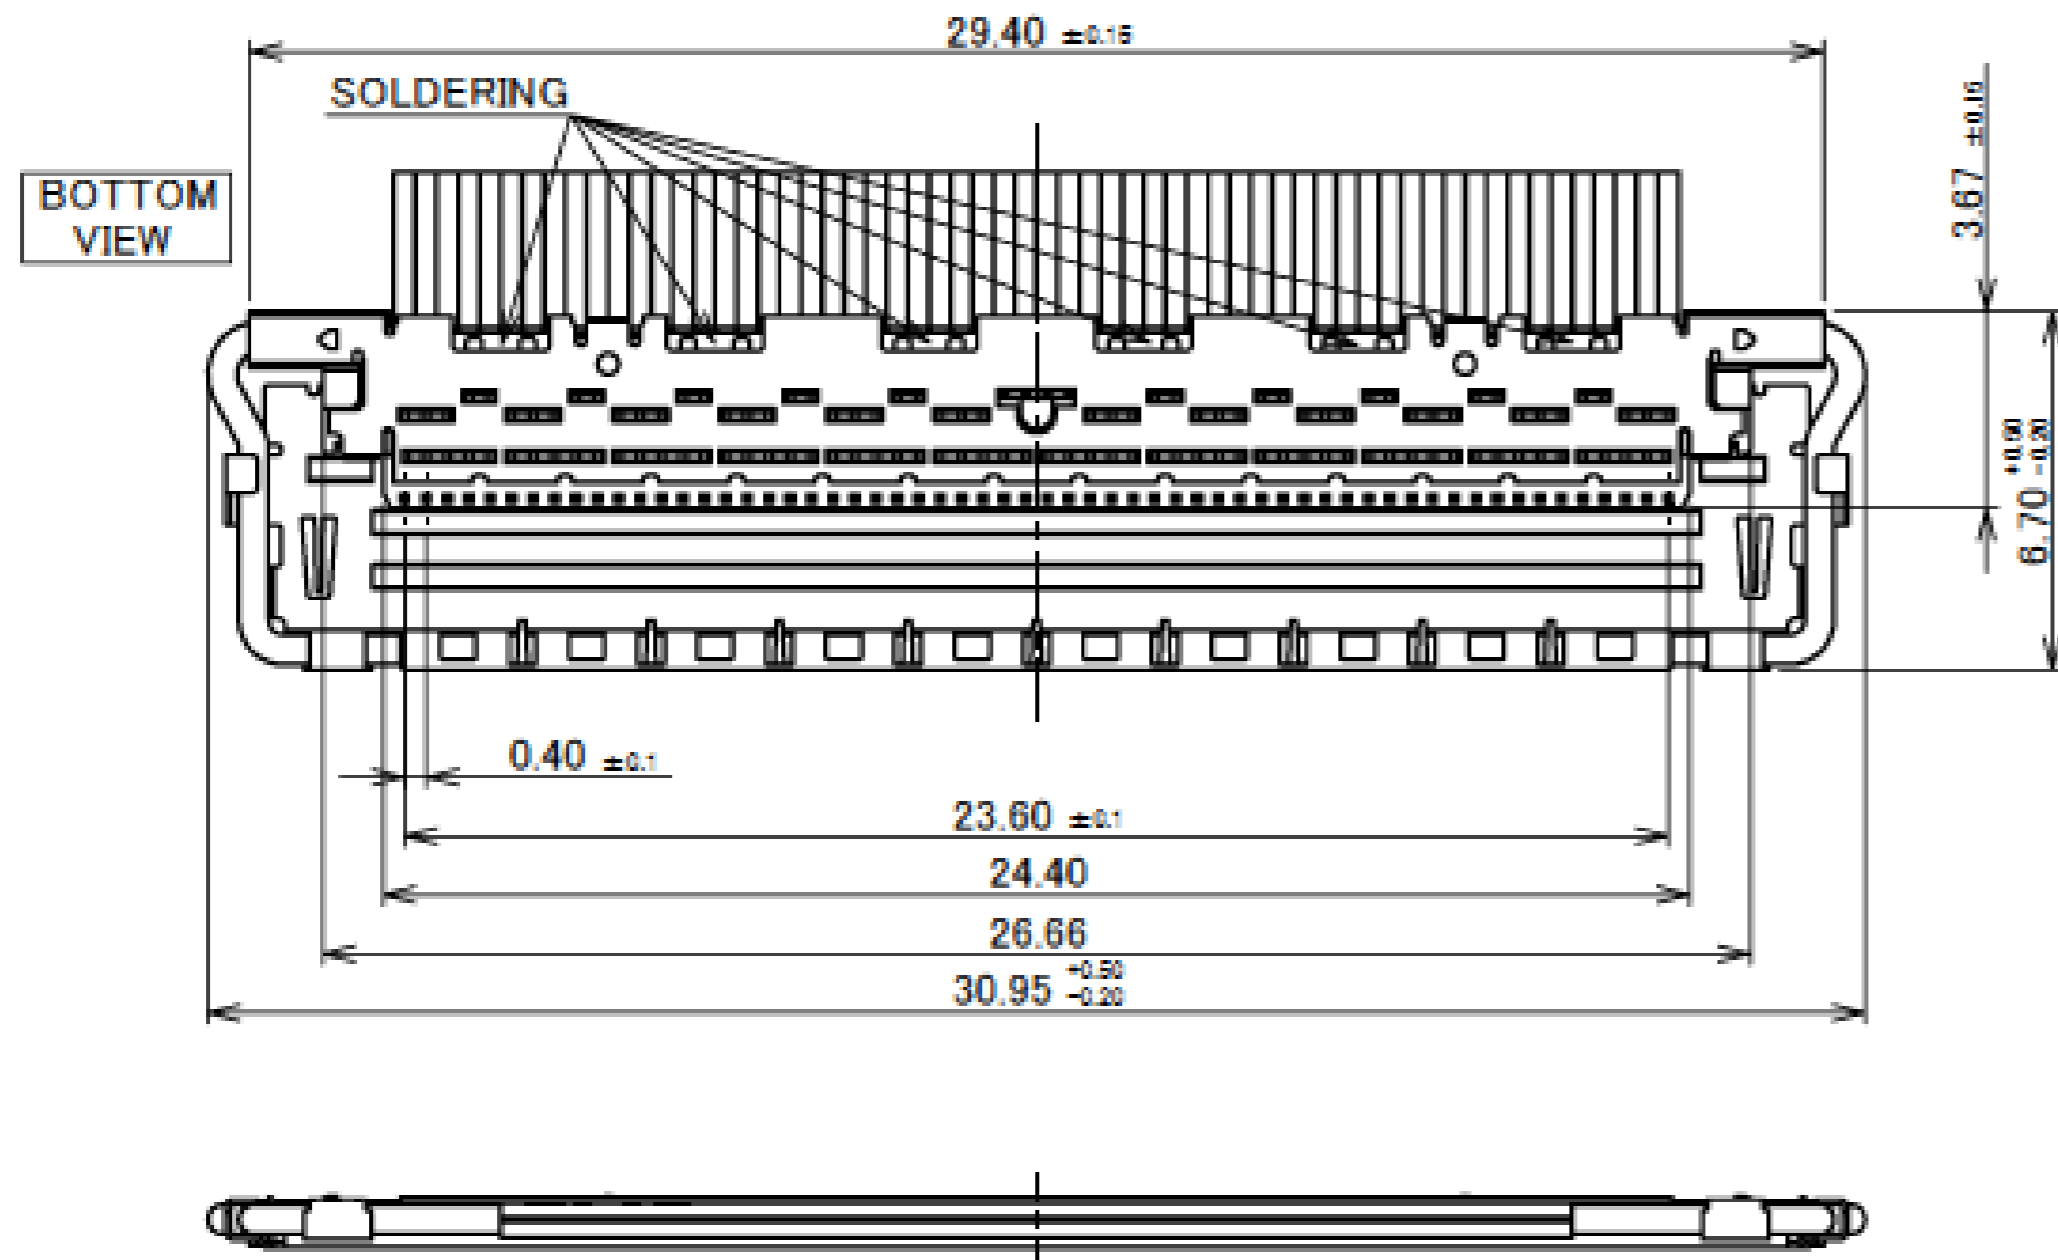


P/N : 20788-0 \*\* T-0 1  
Pos.

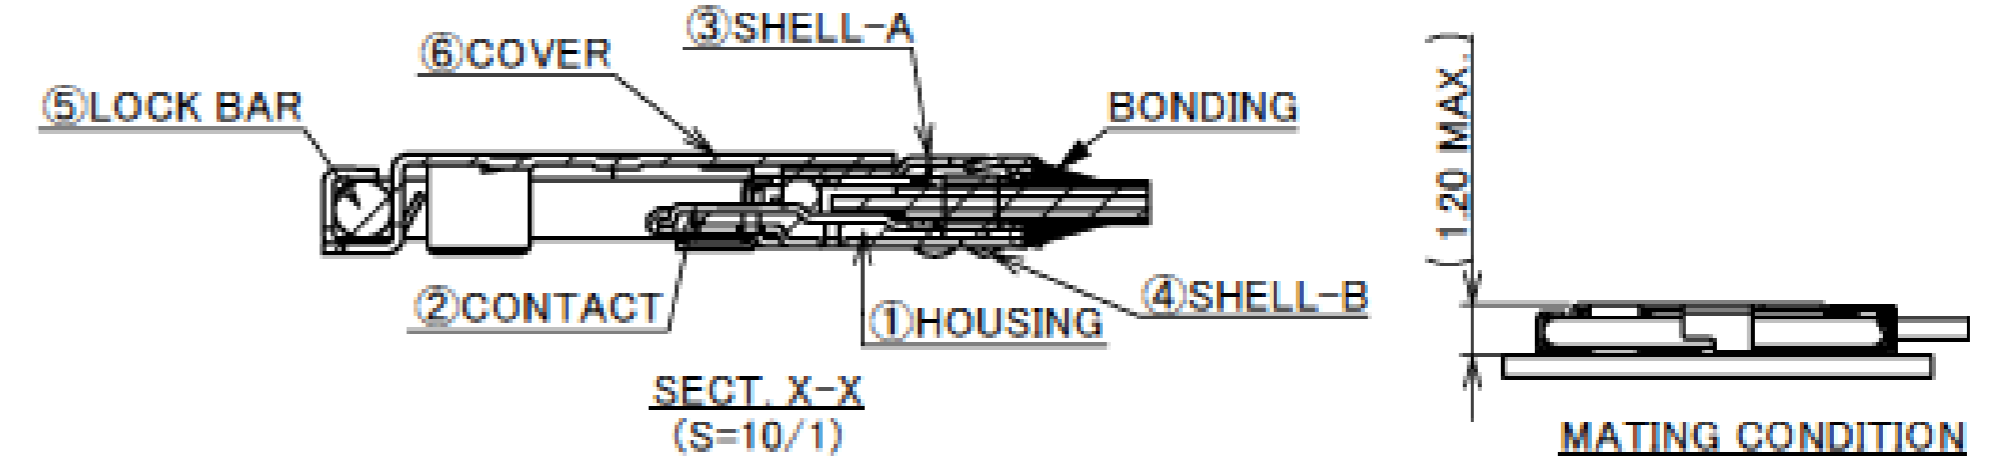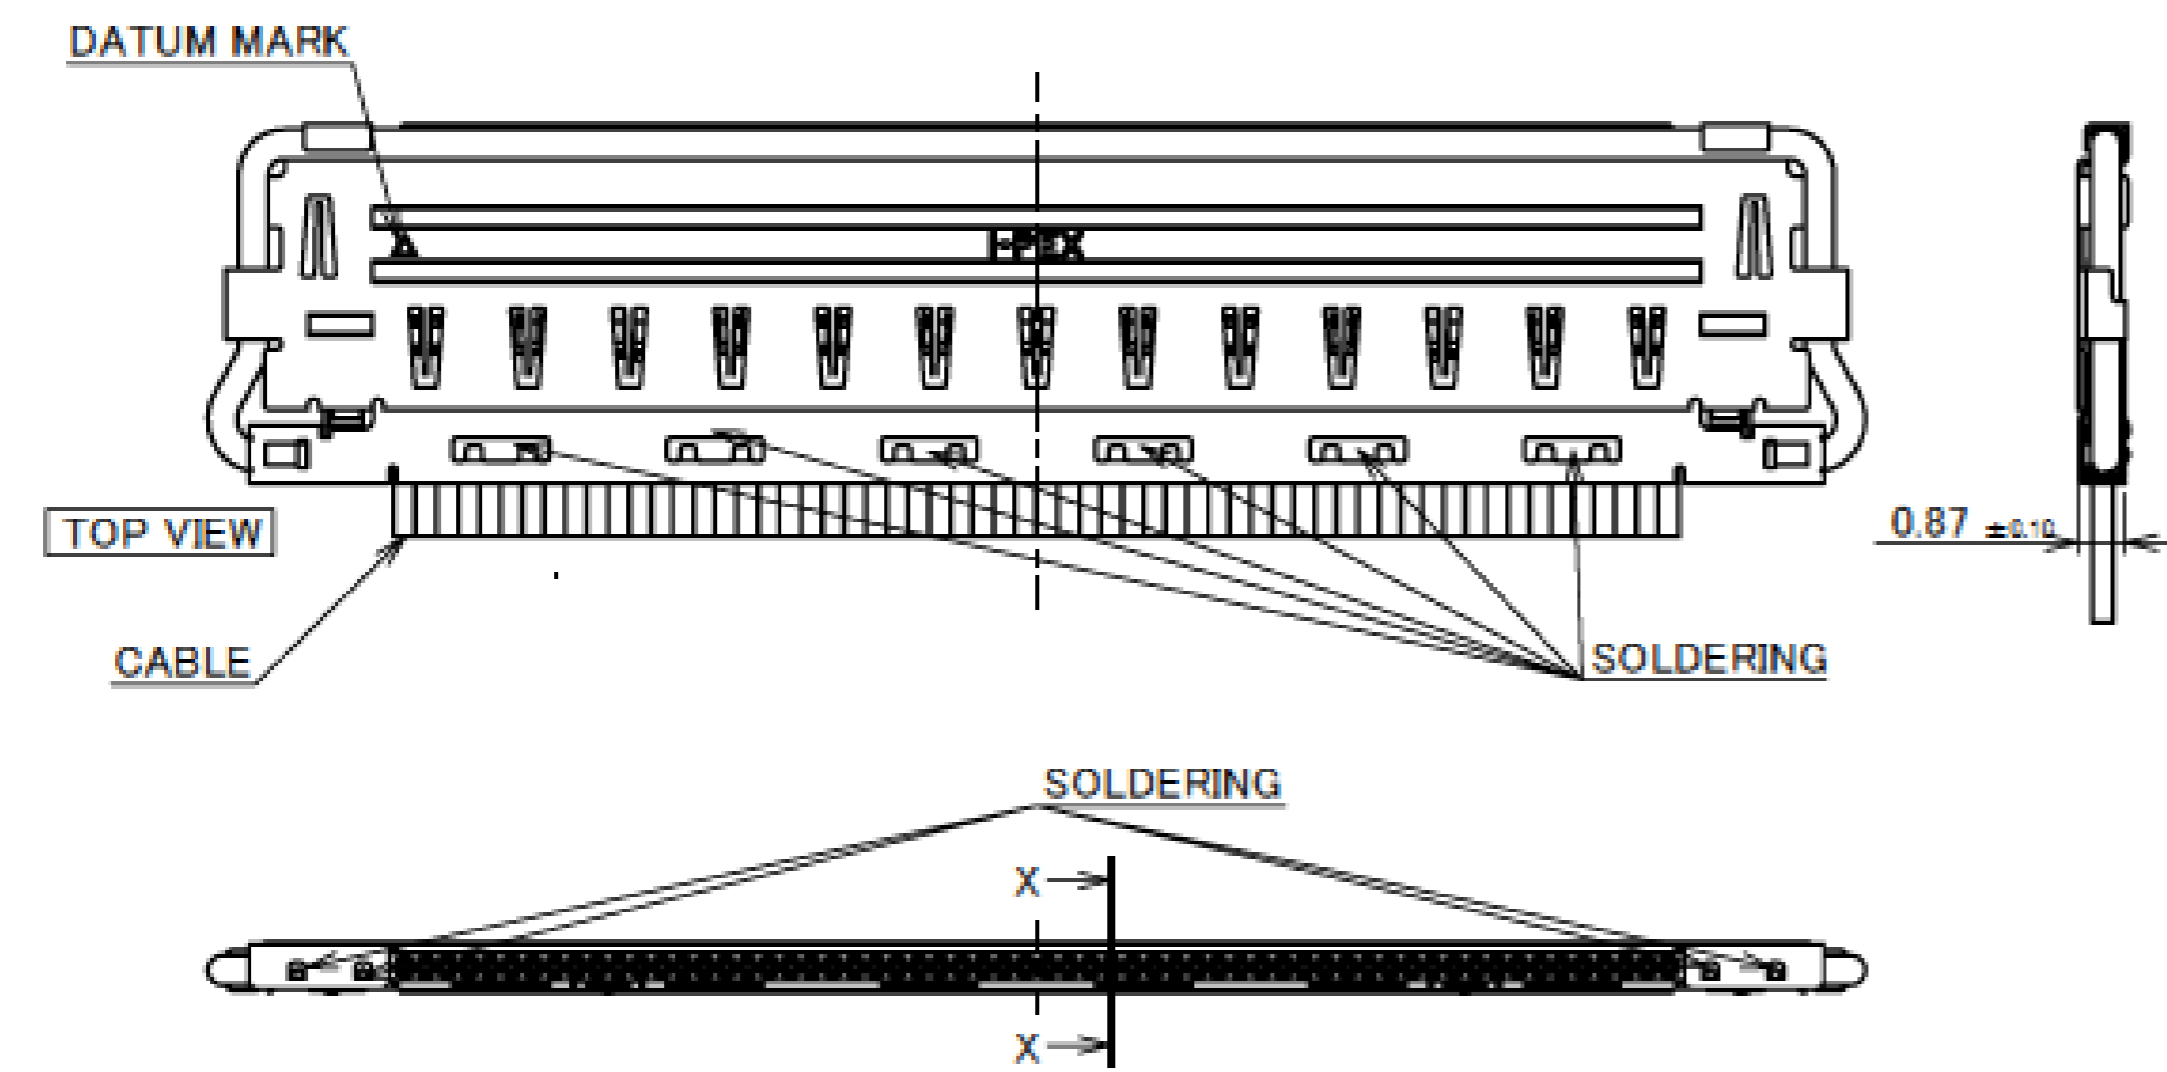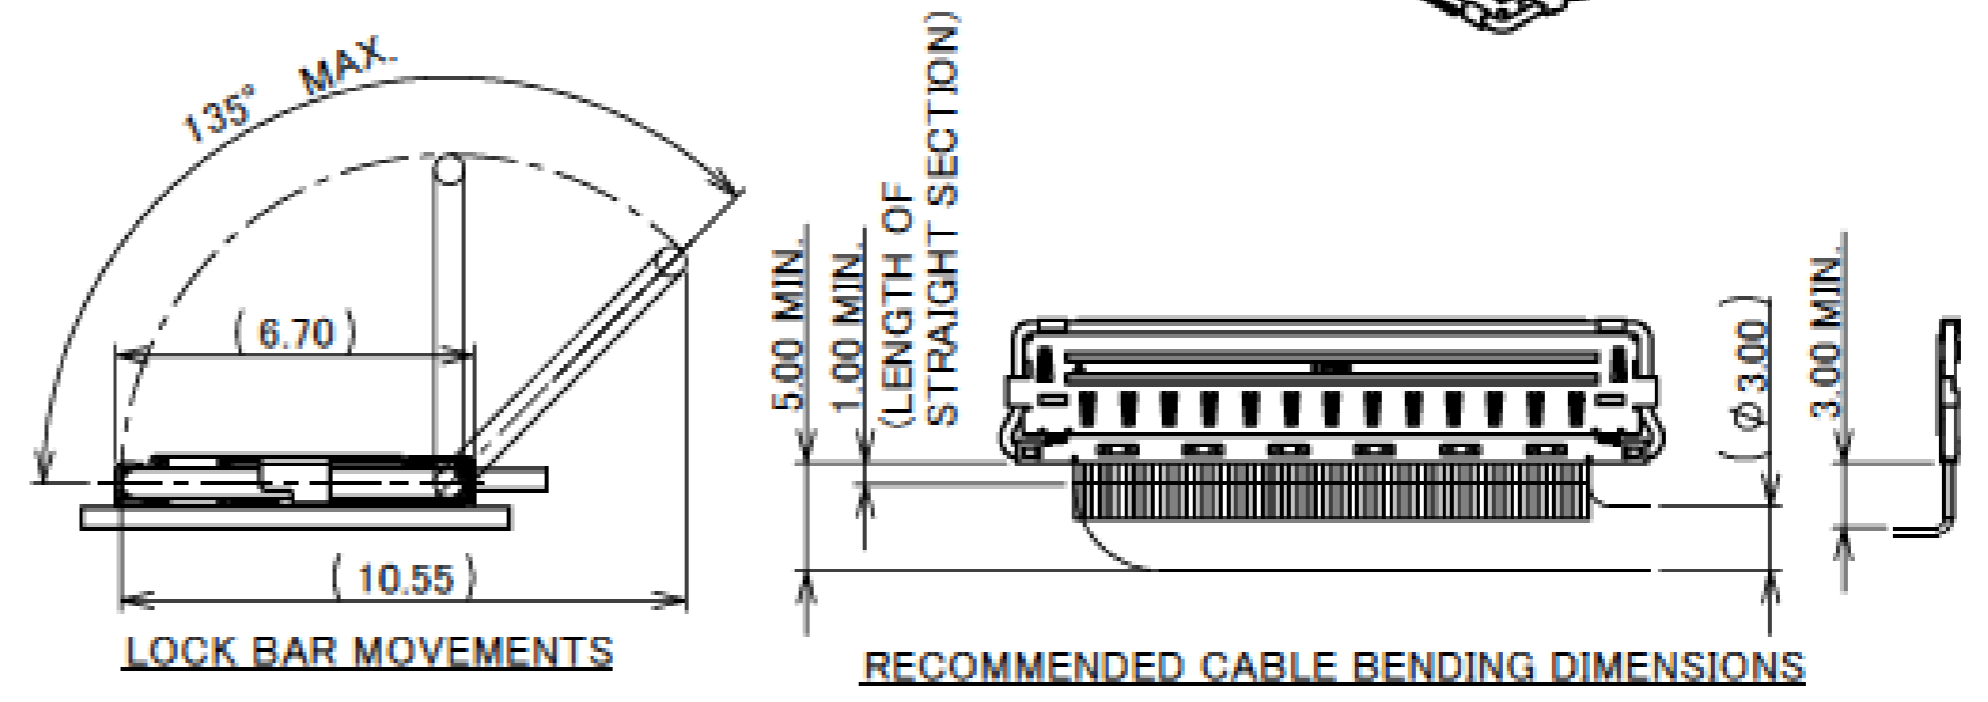

NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
6	COVER	PHOSPHOR BRONZE	ALL OVER Ni 1.00 μm MIN.
5	LOCK BAR	SUS φ 0.55	-
4	SHELL-B	PHOSPHOR BRONZE	PARTIAL Au 0.003 μm MIN. OVER Ni 1.00 μm MIN.
3	SHELL-A	PHOSPHOR BRONZE	PARTIAL Au 0.003 μm MIN. OVER Ni 1.00 μm MIN.
2	CONTACT	PHOSPHOR BRONZE	ALL OVER Ni 1.00 μm MIN. CONTACT & SOLDERING AREA : Au 0.03 μm MIN.
1	HOUSING	LCP	UL94V-0 ,BLACK

Rev.11

PART NO.	Pos.
20788-060T-01	60

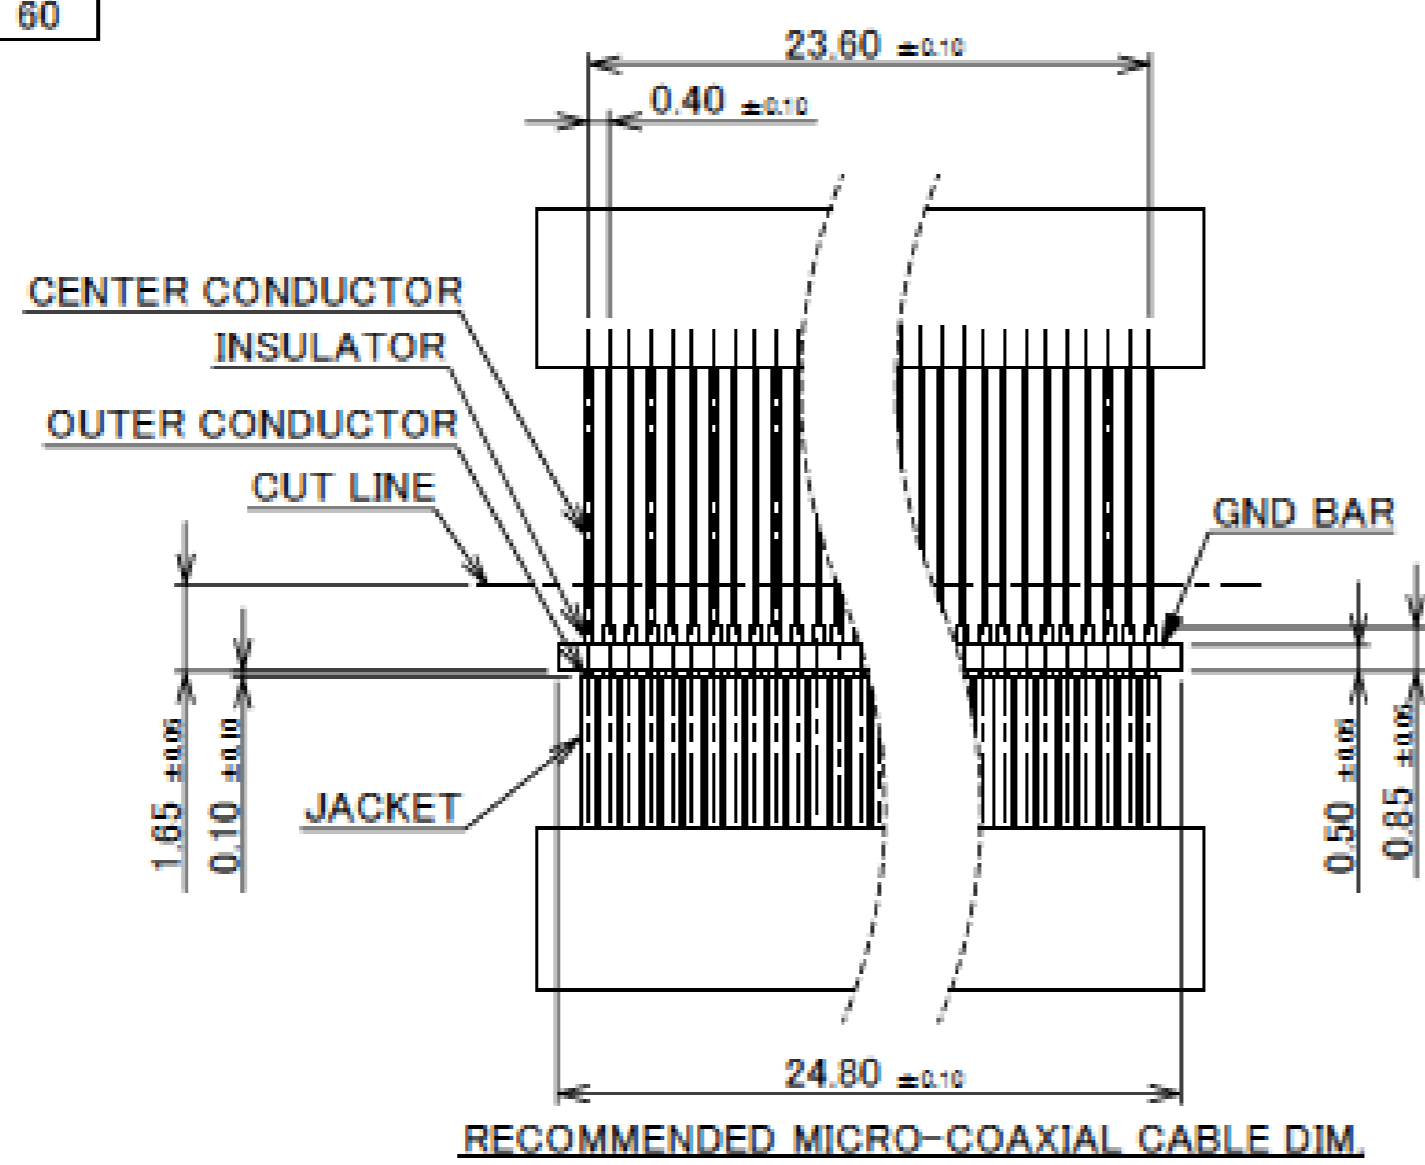



CHARACTERISTIC IMPEDANCE MATCHING MICRO-COAXIAL CABLE

	a
#38	0.12
#40	0.09
#42	0.075
#44	0.063

CHARACTERISTIC IMPEDANCE UN-MATCHING MICRO-COAXIAL CABLE

	a
#36	0.15

MICRO-COAXIAL CABLE #36 : NOT RECOMMENDED FOR HIGH SPEED SIGNAL TRANSFER


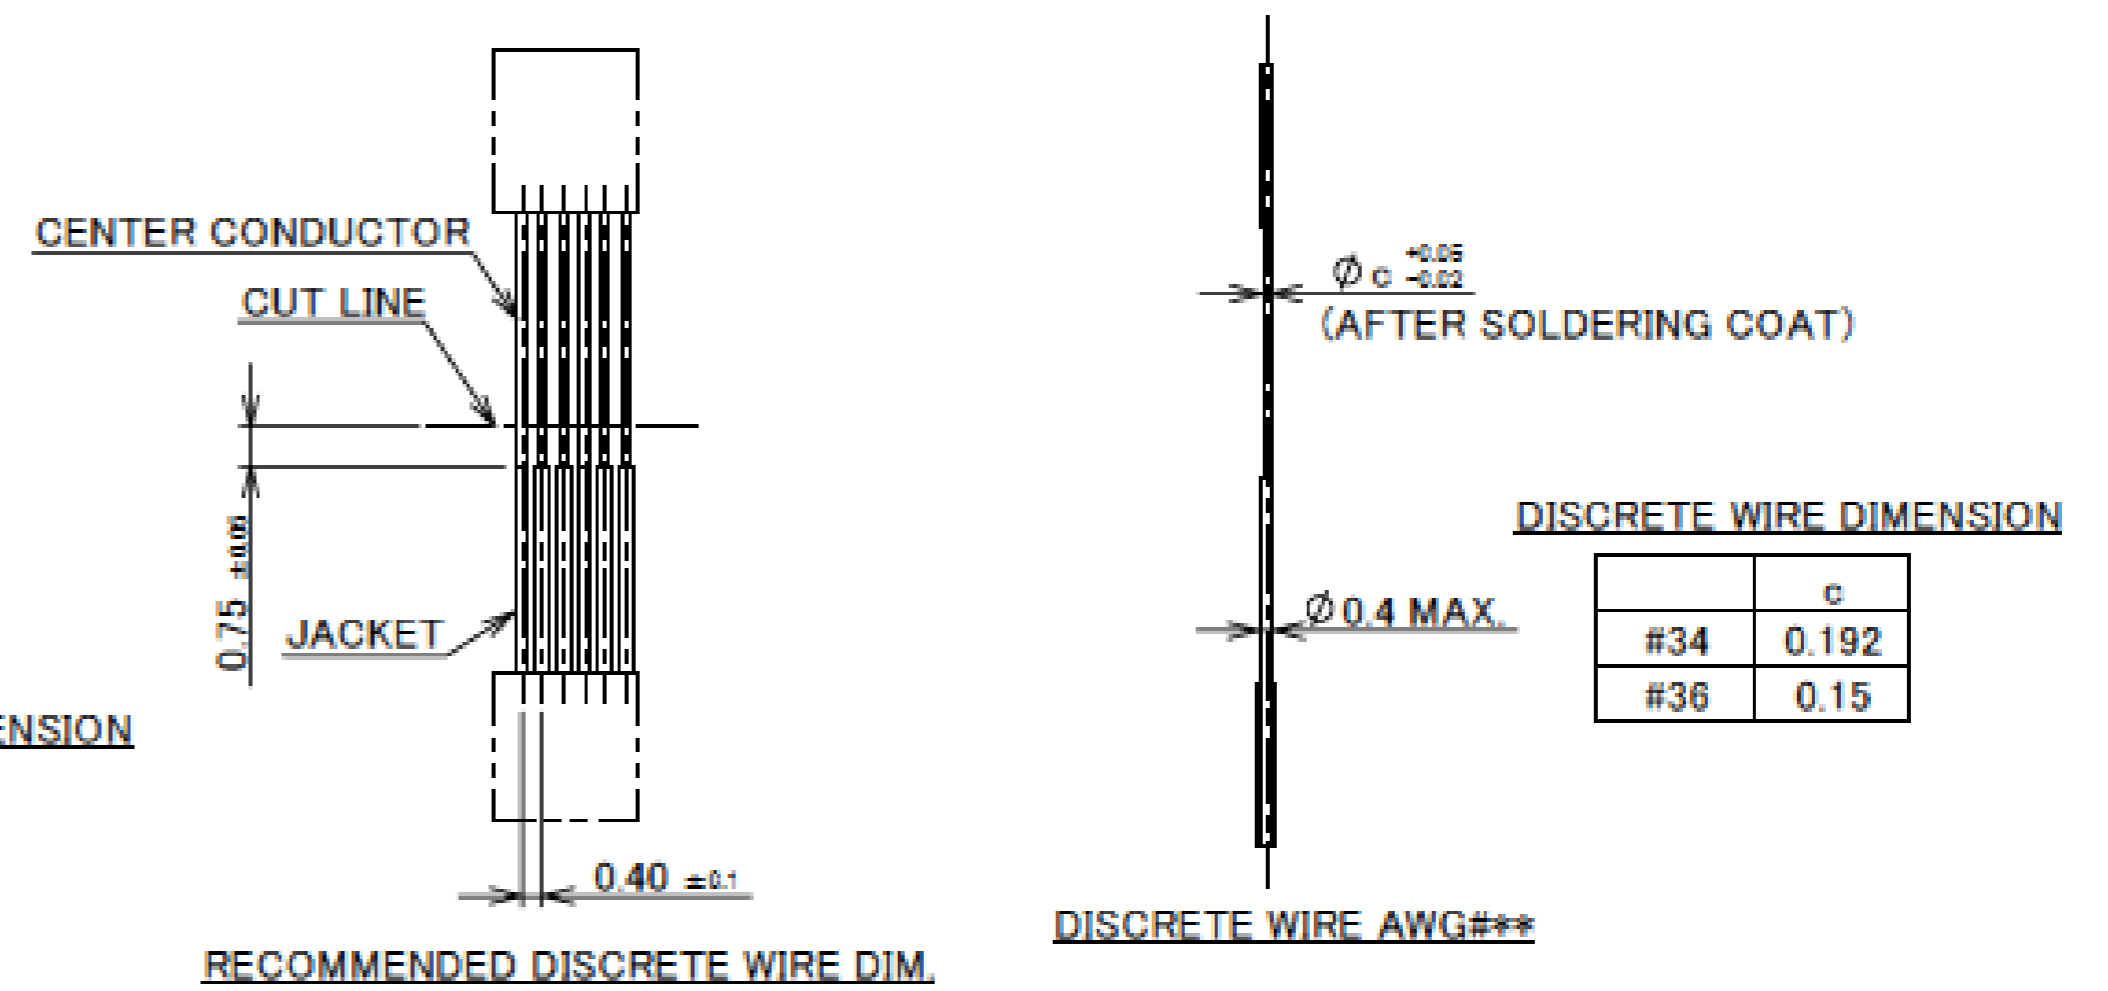
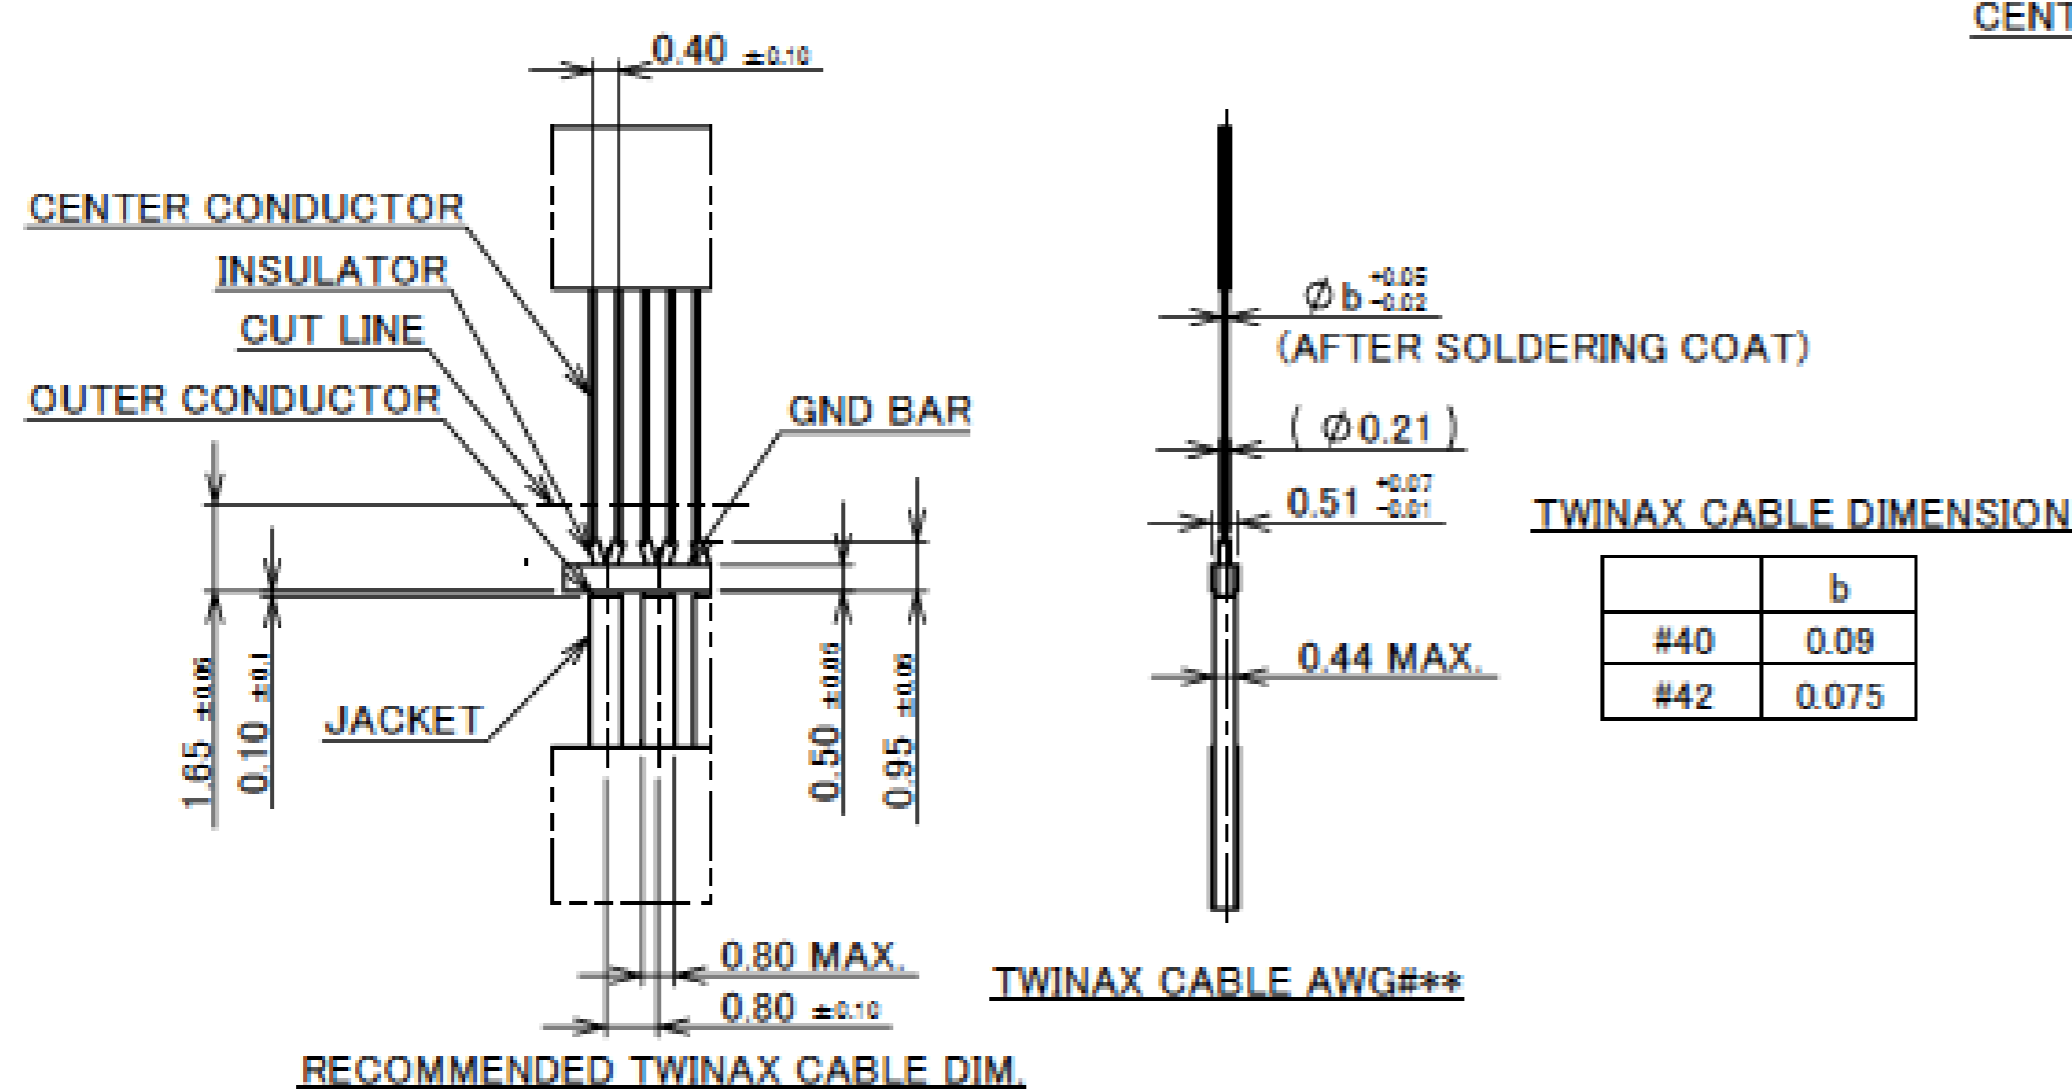


Rev.11

# Plug Housing Assembly

Recommended P/N 20680-0\*\*T-01

PART NO.	Pos.	A	B	C	D	E	F	G	H	J
20680-020T-01	20	9.10	8.65	8.30	7.60	8.40	10.66	13.40	-	5.00
20680-030T-01	30	13.10	12.65	12.30	11.60	12.40	14.66	17.40	4.00	8.00
20680-040T-01	40	17.10	16.65	16.30	15.60	16.40	18.66	21.40	8.00	12.00
20680-050T-01	50	21.10	20.65	20.30	19.60	20.40	22.66	25.40	12.00	16.00
20680-060T-01	60	25.10	24.65	24.30	23.60	24.40	26.66	29.40	16.00	20.00

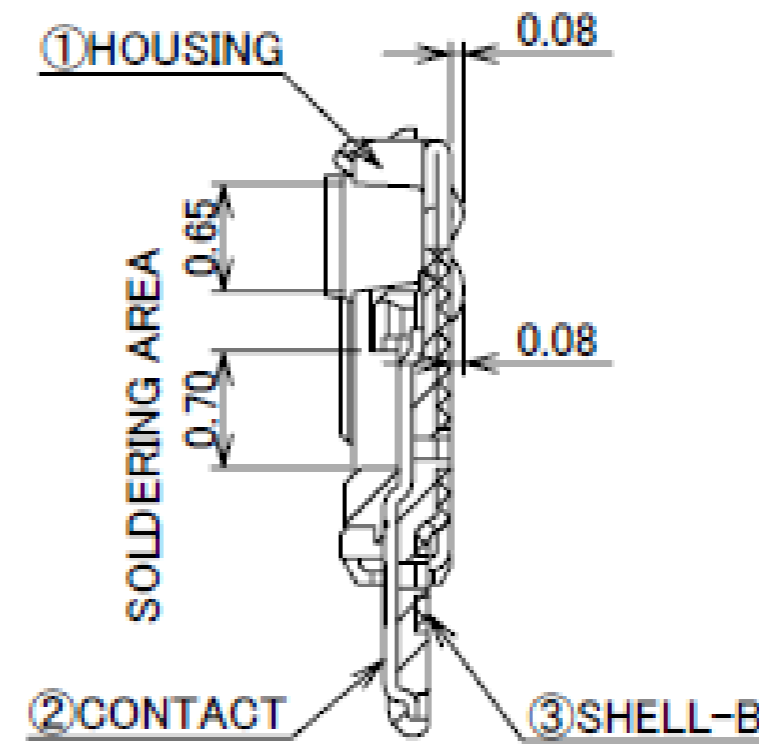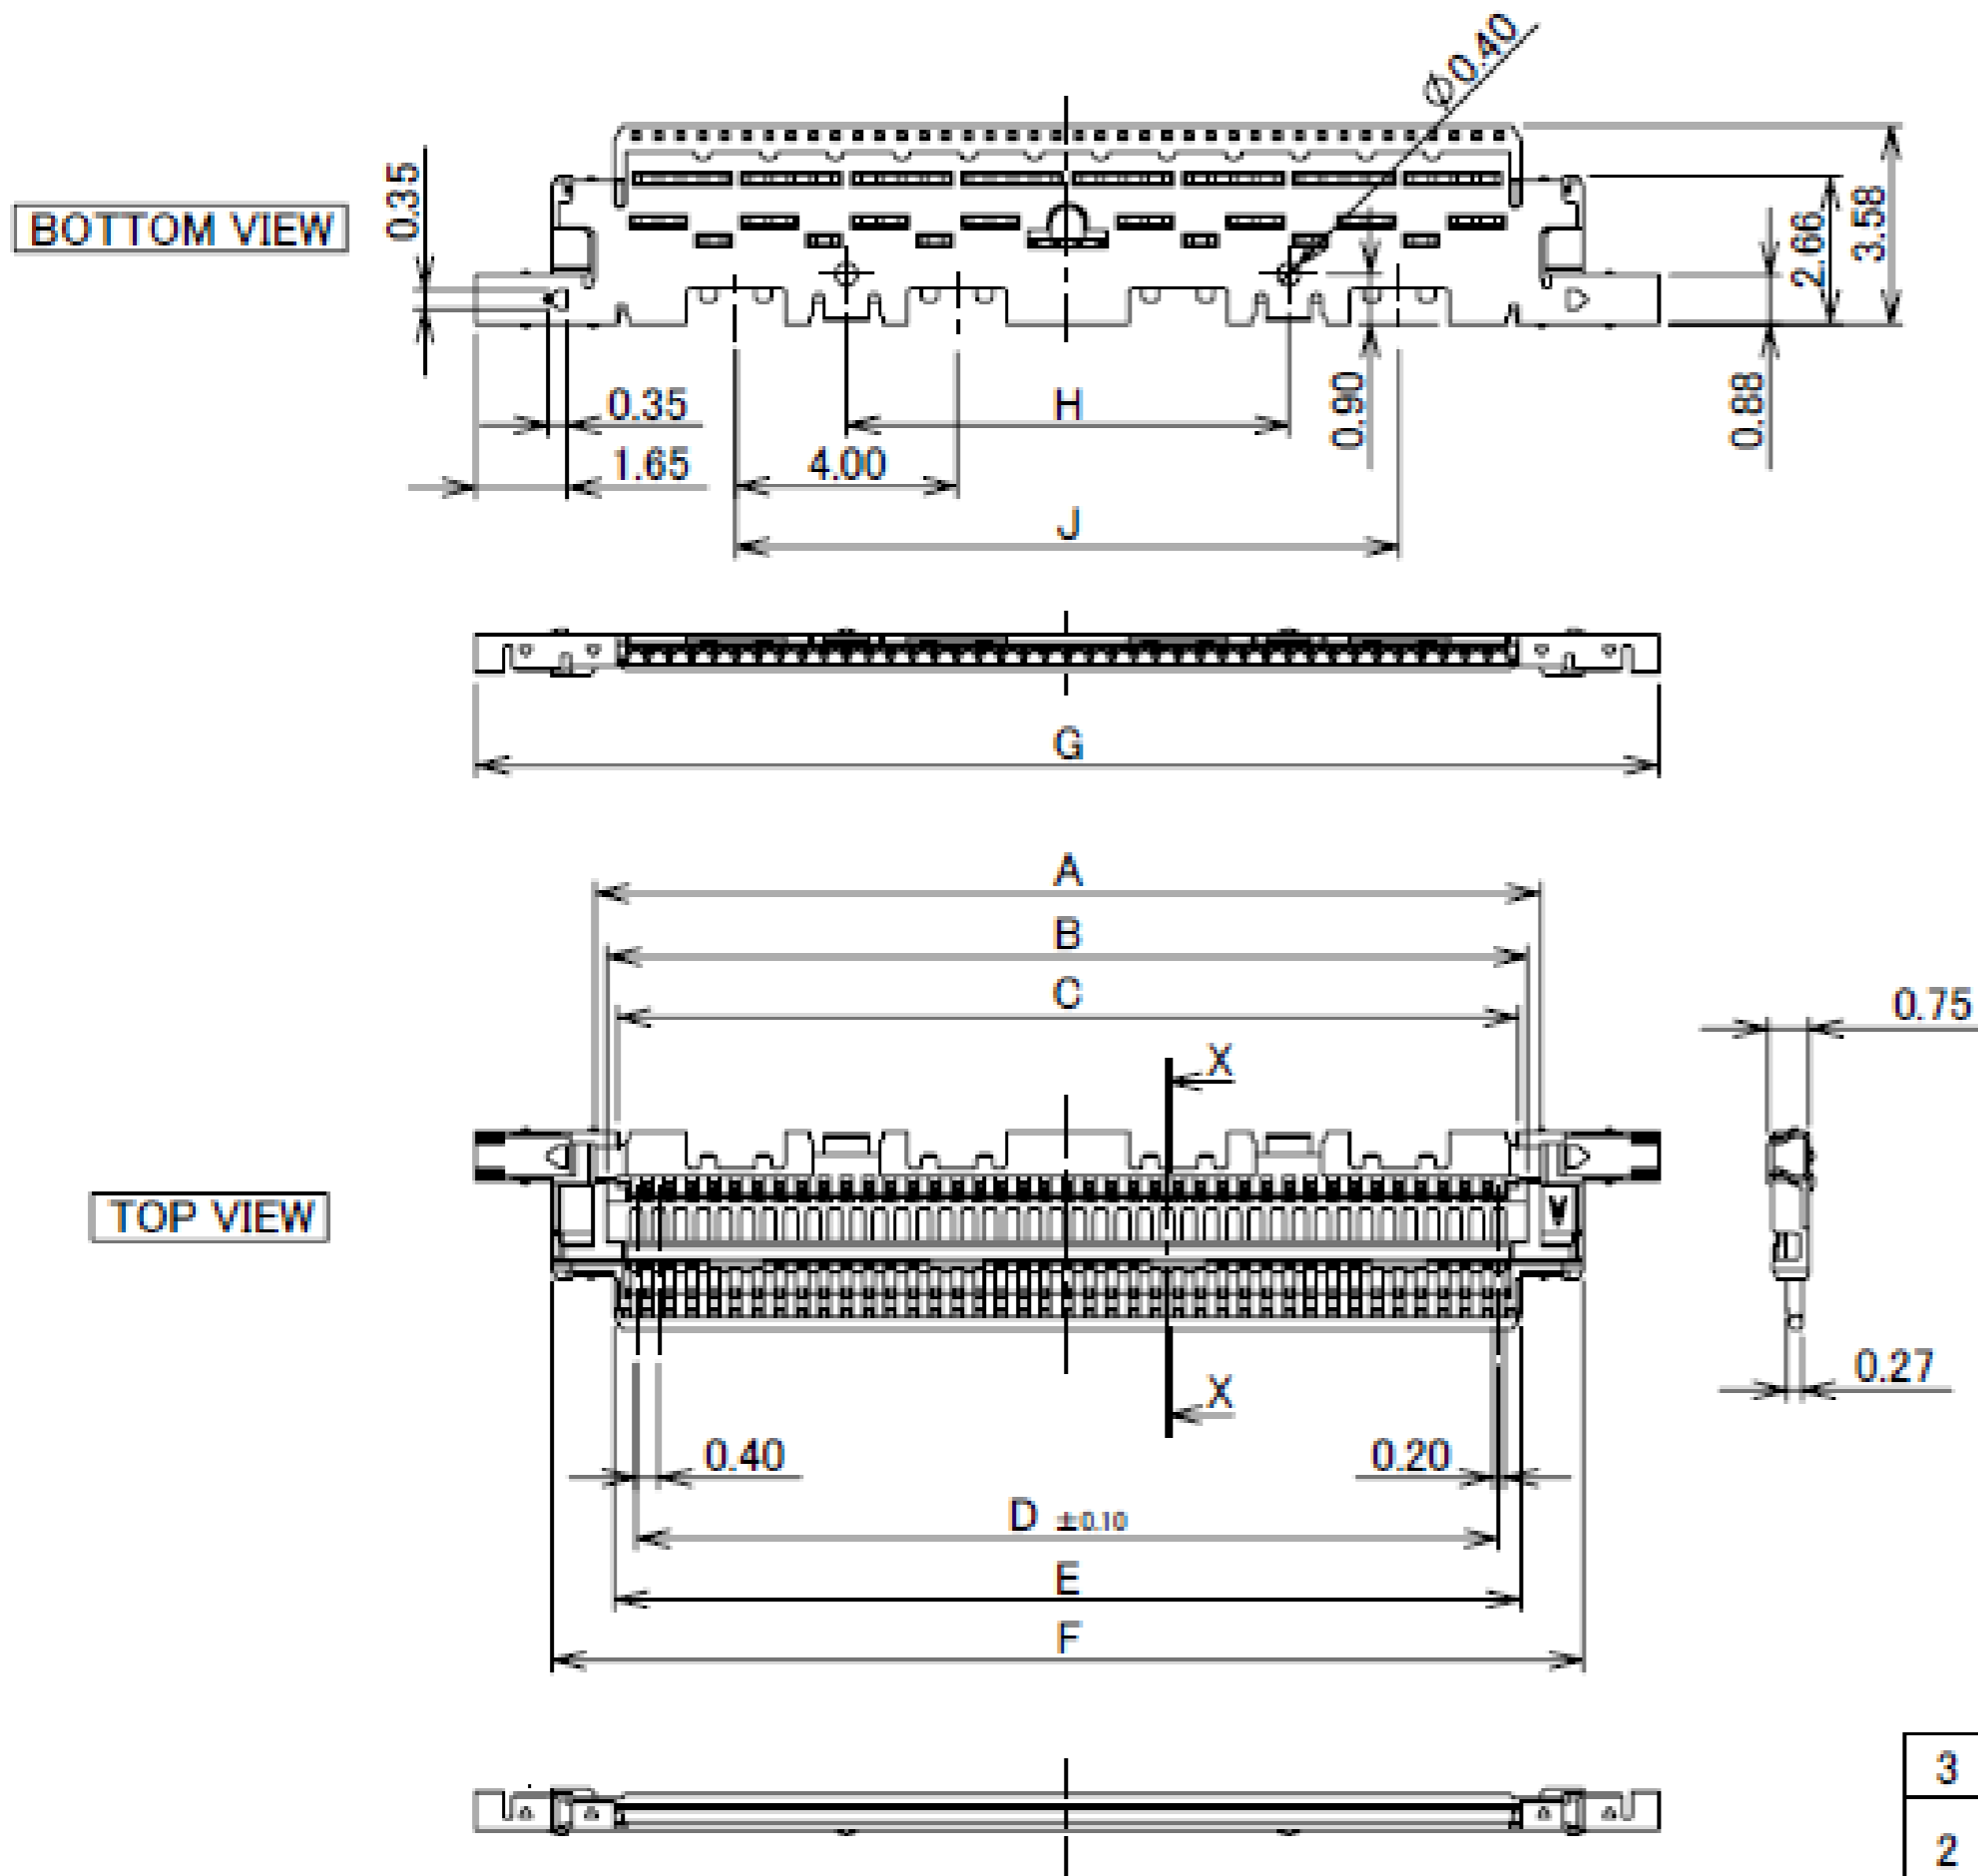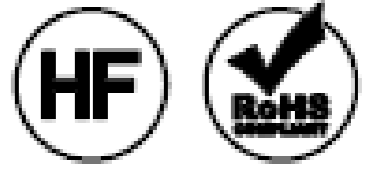

SECT. X-X  
(S=15/1)

NOTES.

- THIS PART IS ASSEMBLED WITH SHELL A(P/N 3204-0\*\*1) AND LOCK BAR ASSY(P/N 20681-0\*\*T-01) AFTER SOLDERED THE CABLE, AND IT BECOMES P/N 20679-0\*\*T-01
- THIS PART IS ASSEMBLED WITH SHELL A(P/N 3204-0\*\*1) AND LOCK BAR ASSY(P/N 20789-0\*\*T-01) AFTER SOLDERED THE CABLE, AND IT BECOMES P/N 20788-0\*\*T-01



NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
3	SHELL-B	PHOSPHOR BRONZE	PARTIAL Au 0.003 $\mu$ m MIN. OVER Ni 1.00 $\mu$ m MIN.
2	CONTACT	PHOSPHOR BRONZE	ALL OVER Ni 1.00 $\mu$ m MIN. CONTACT & SOLDERING AREA : Au 0.03 $\mu$ m MIN.
1	HOUSING	LCP	UL94V-0 ,BLACK

Rev.7


# Plug Shell-A

Recommended P/N 3204-0\*\*1


PART NO.	Pos.	A	B	C	D	E
3204-0201	20	13.40	7.88	10.66	2.50	5.00
3204-0301	30	17.40	11.88	14.66	3.00	9.00
3204-0401	40	21.40	15.88	18.66	3.25	13.00
3204-0501	50	25.40	19.88	22.66	3.40	17.00
3204-0601	60	29.40	23.88	26.66	4.00	20.00

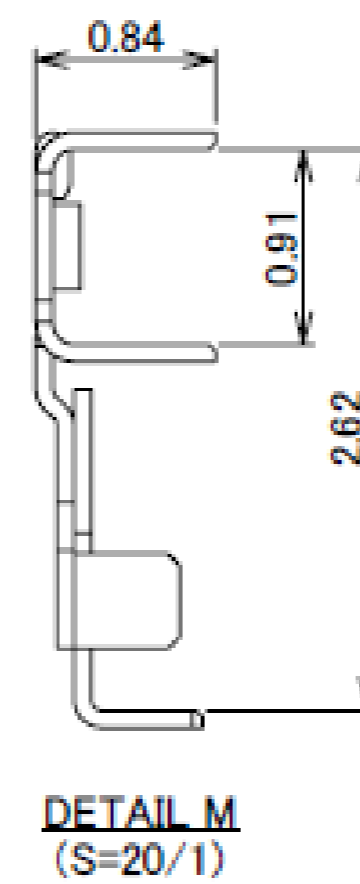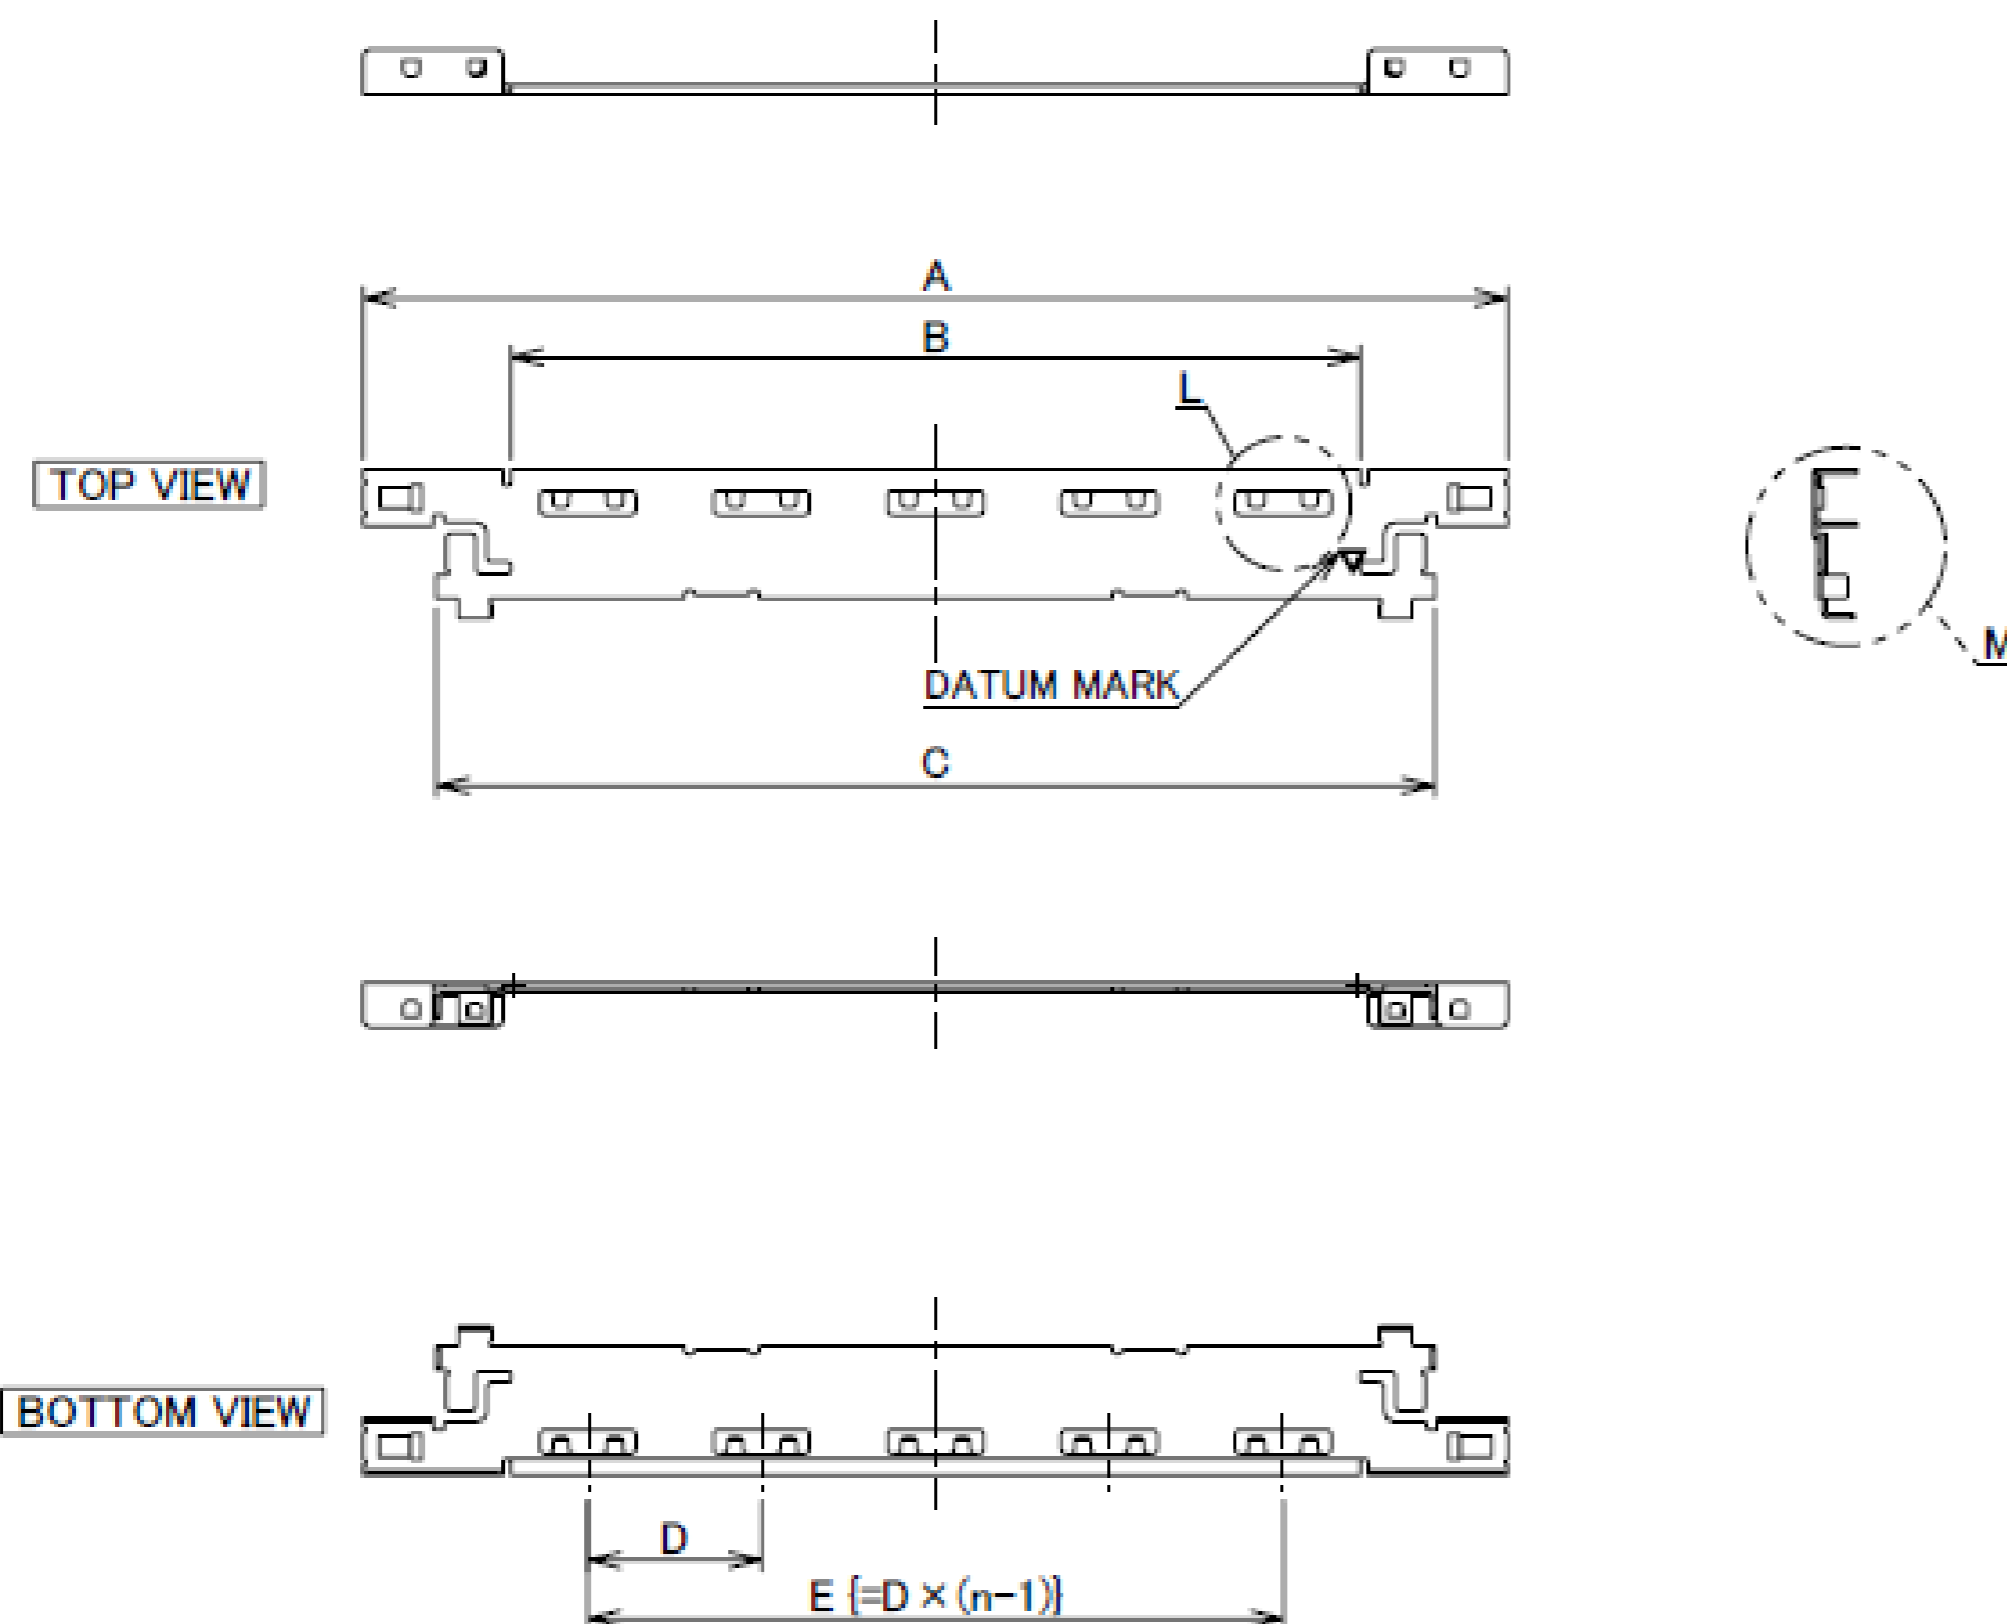

DETAIL M  
(S=20/1)

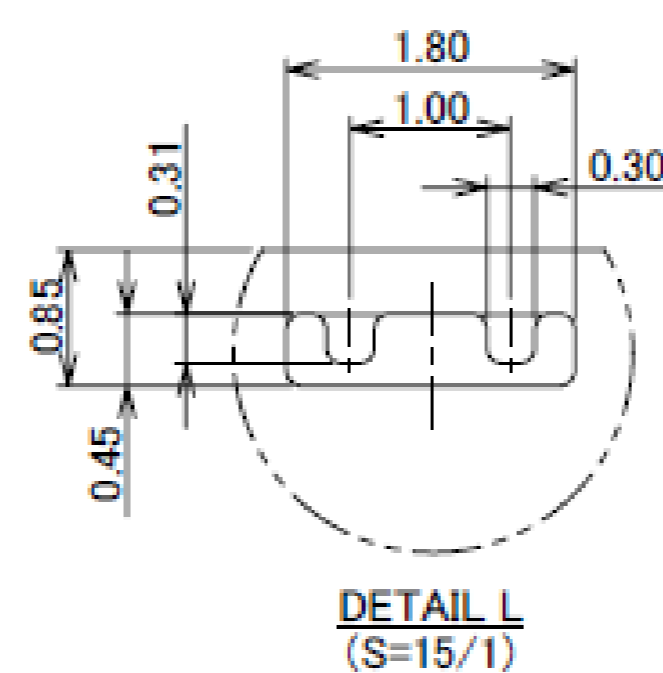

DETAIL L  
(S=15/1)



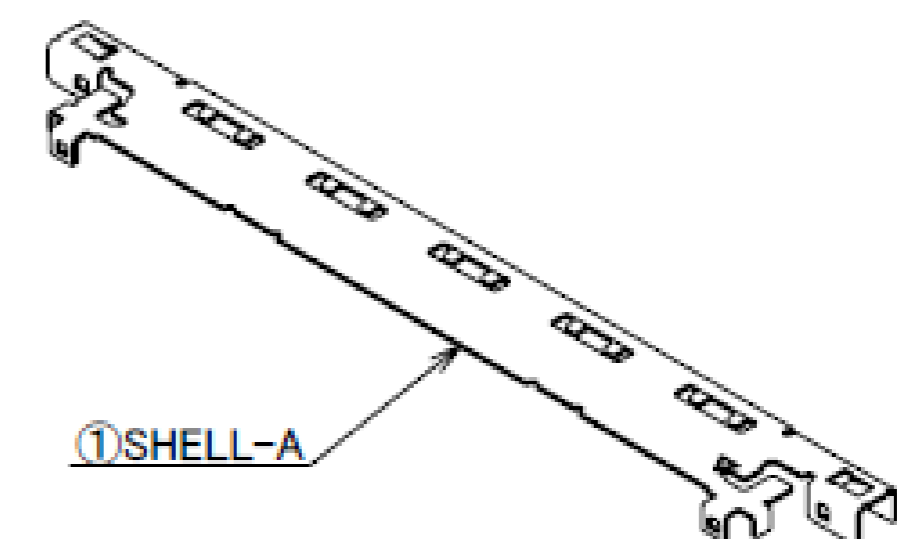


NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
1	SHELL-A	PHOSPHOR BRONZE	PARTIAL Au 0.003 $\mu$ m MIN. OVER Ni 1.00 $\mu$ m MIN.

Rev.7

# Lock Bar Assembly

Recommended P/N	20789-0**T-01
PART NO.	Pos.
20789-060T-01	60

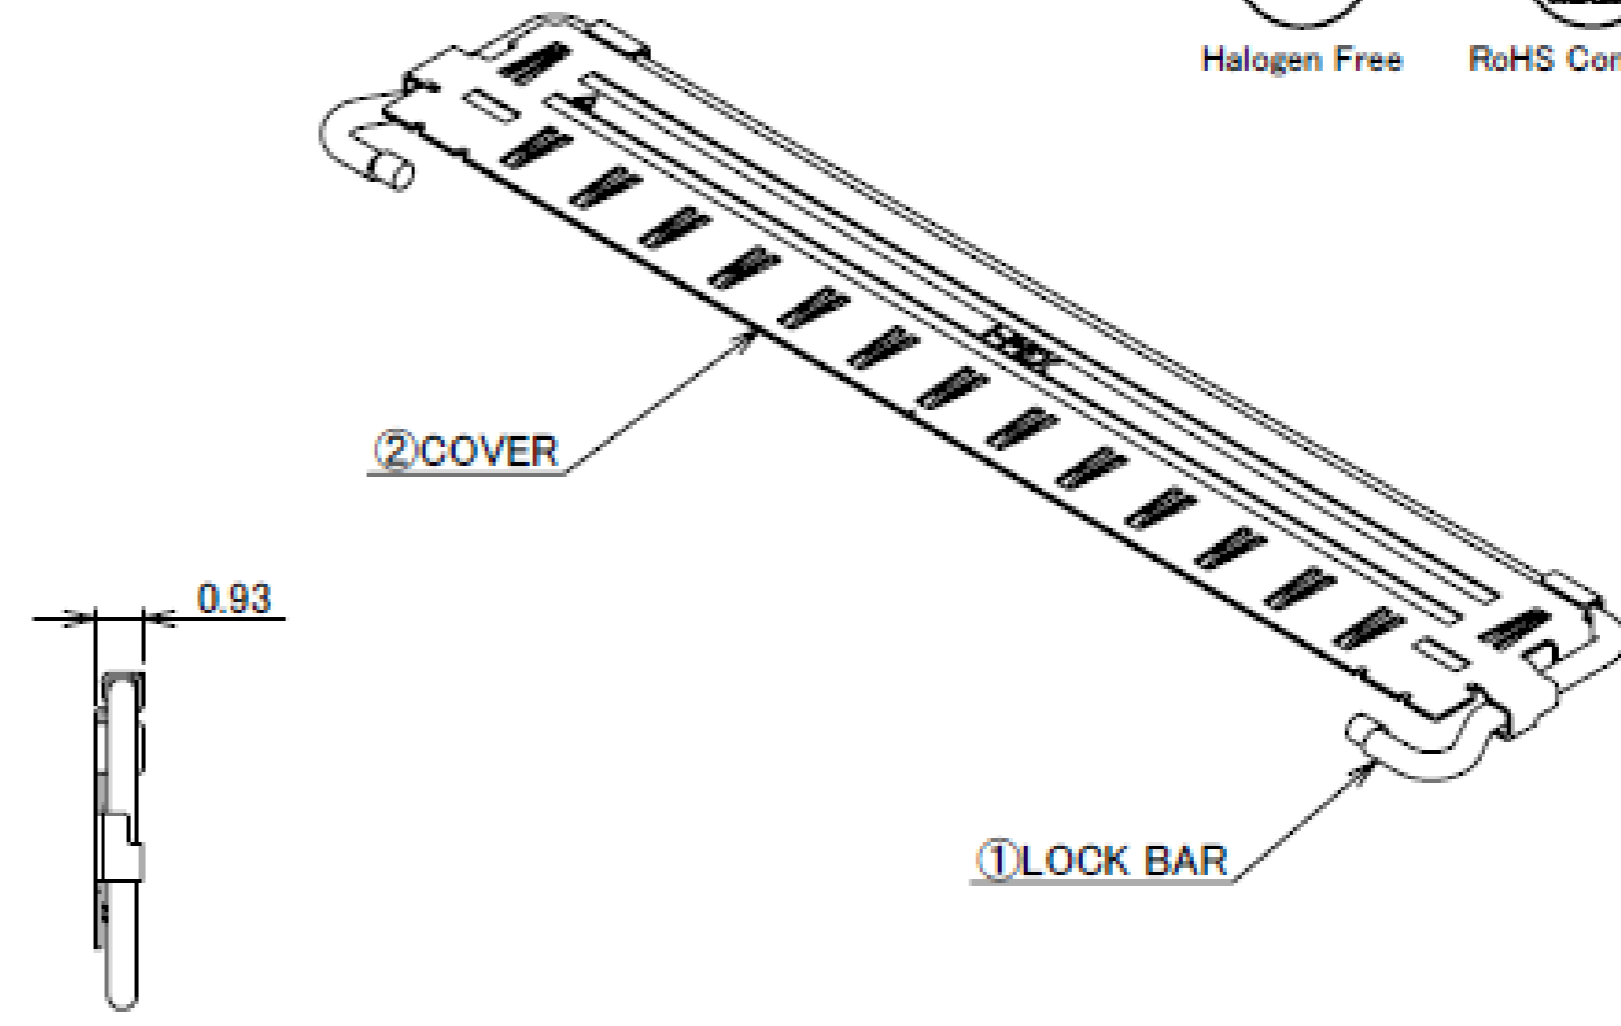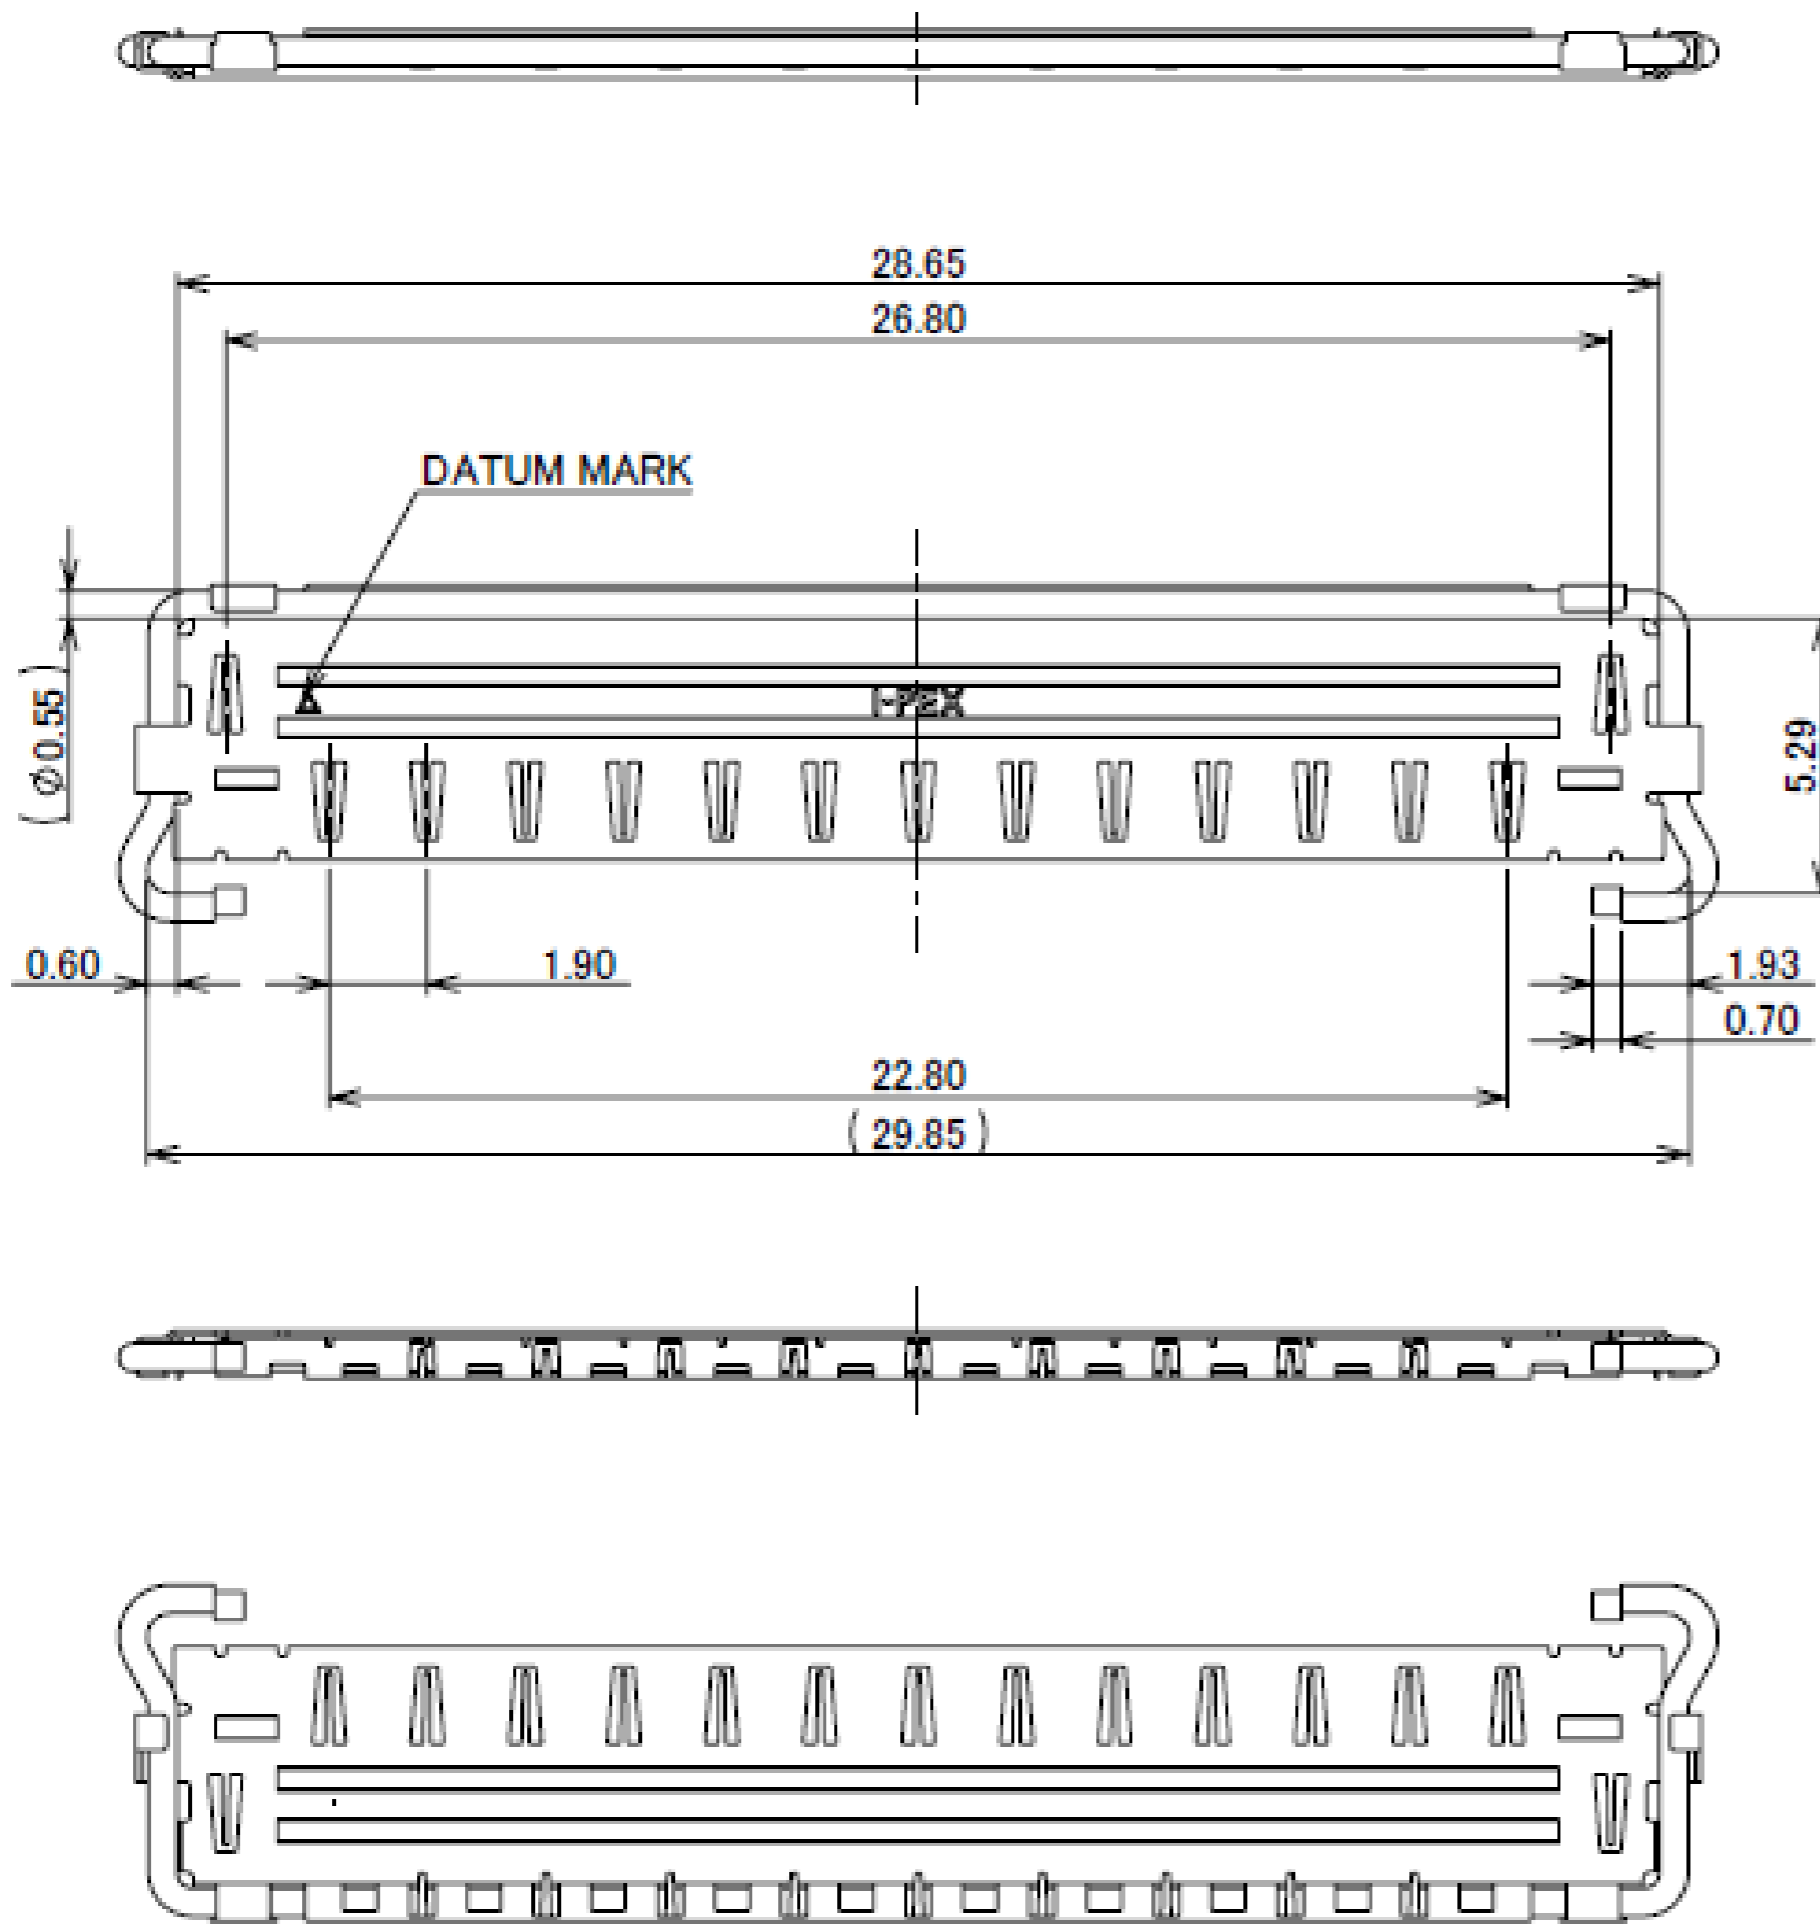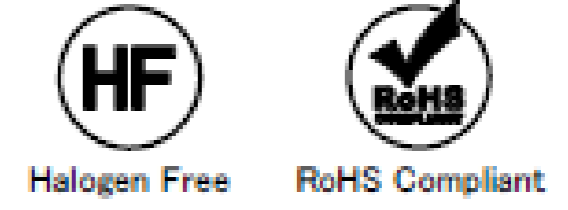


2	COVER	PHOSPHOR BRONZE	ALL OVER Ni 1.00 $\mu$ m MIN.
1	LOCK BAR	SUS $\phi 0.55$	-
NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS



Rev.9

# Receptacle Assembly

Recommended P/N	20790-0**E-02
PART NO.	Pos.
20790-060E-##	60

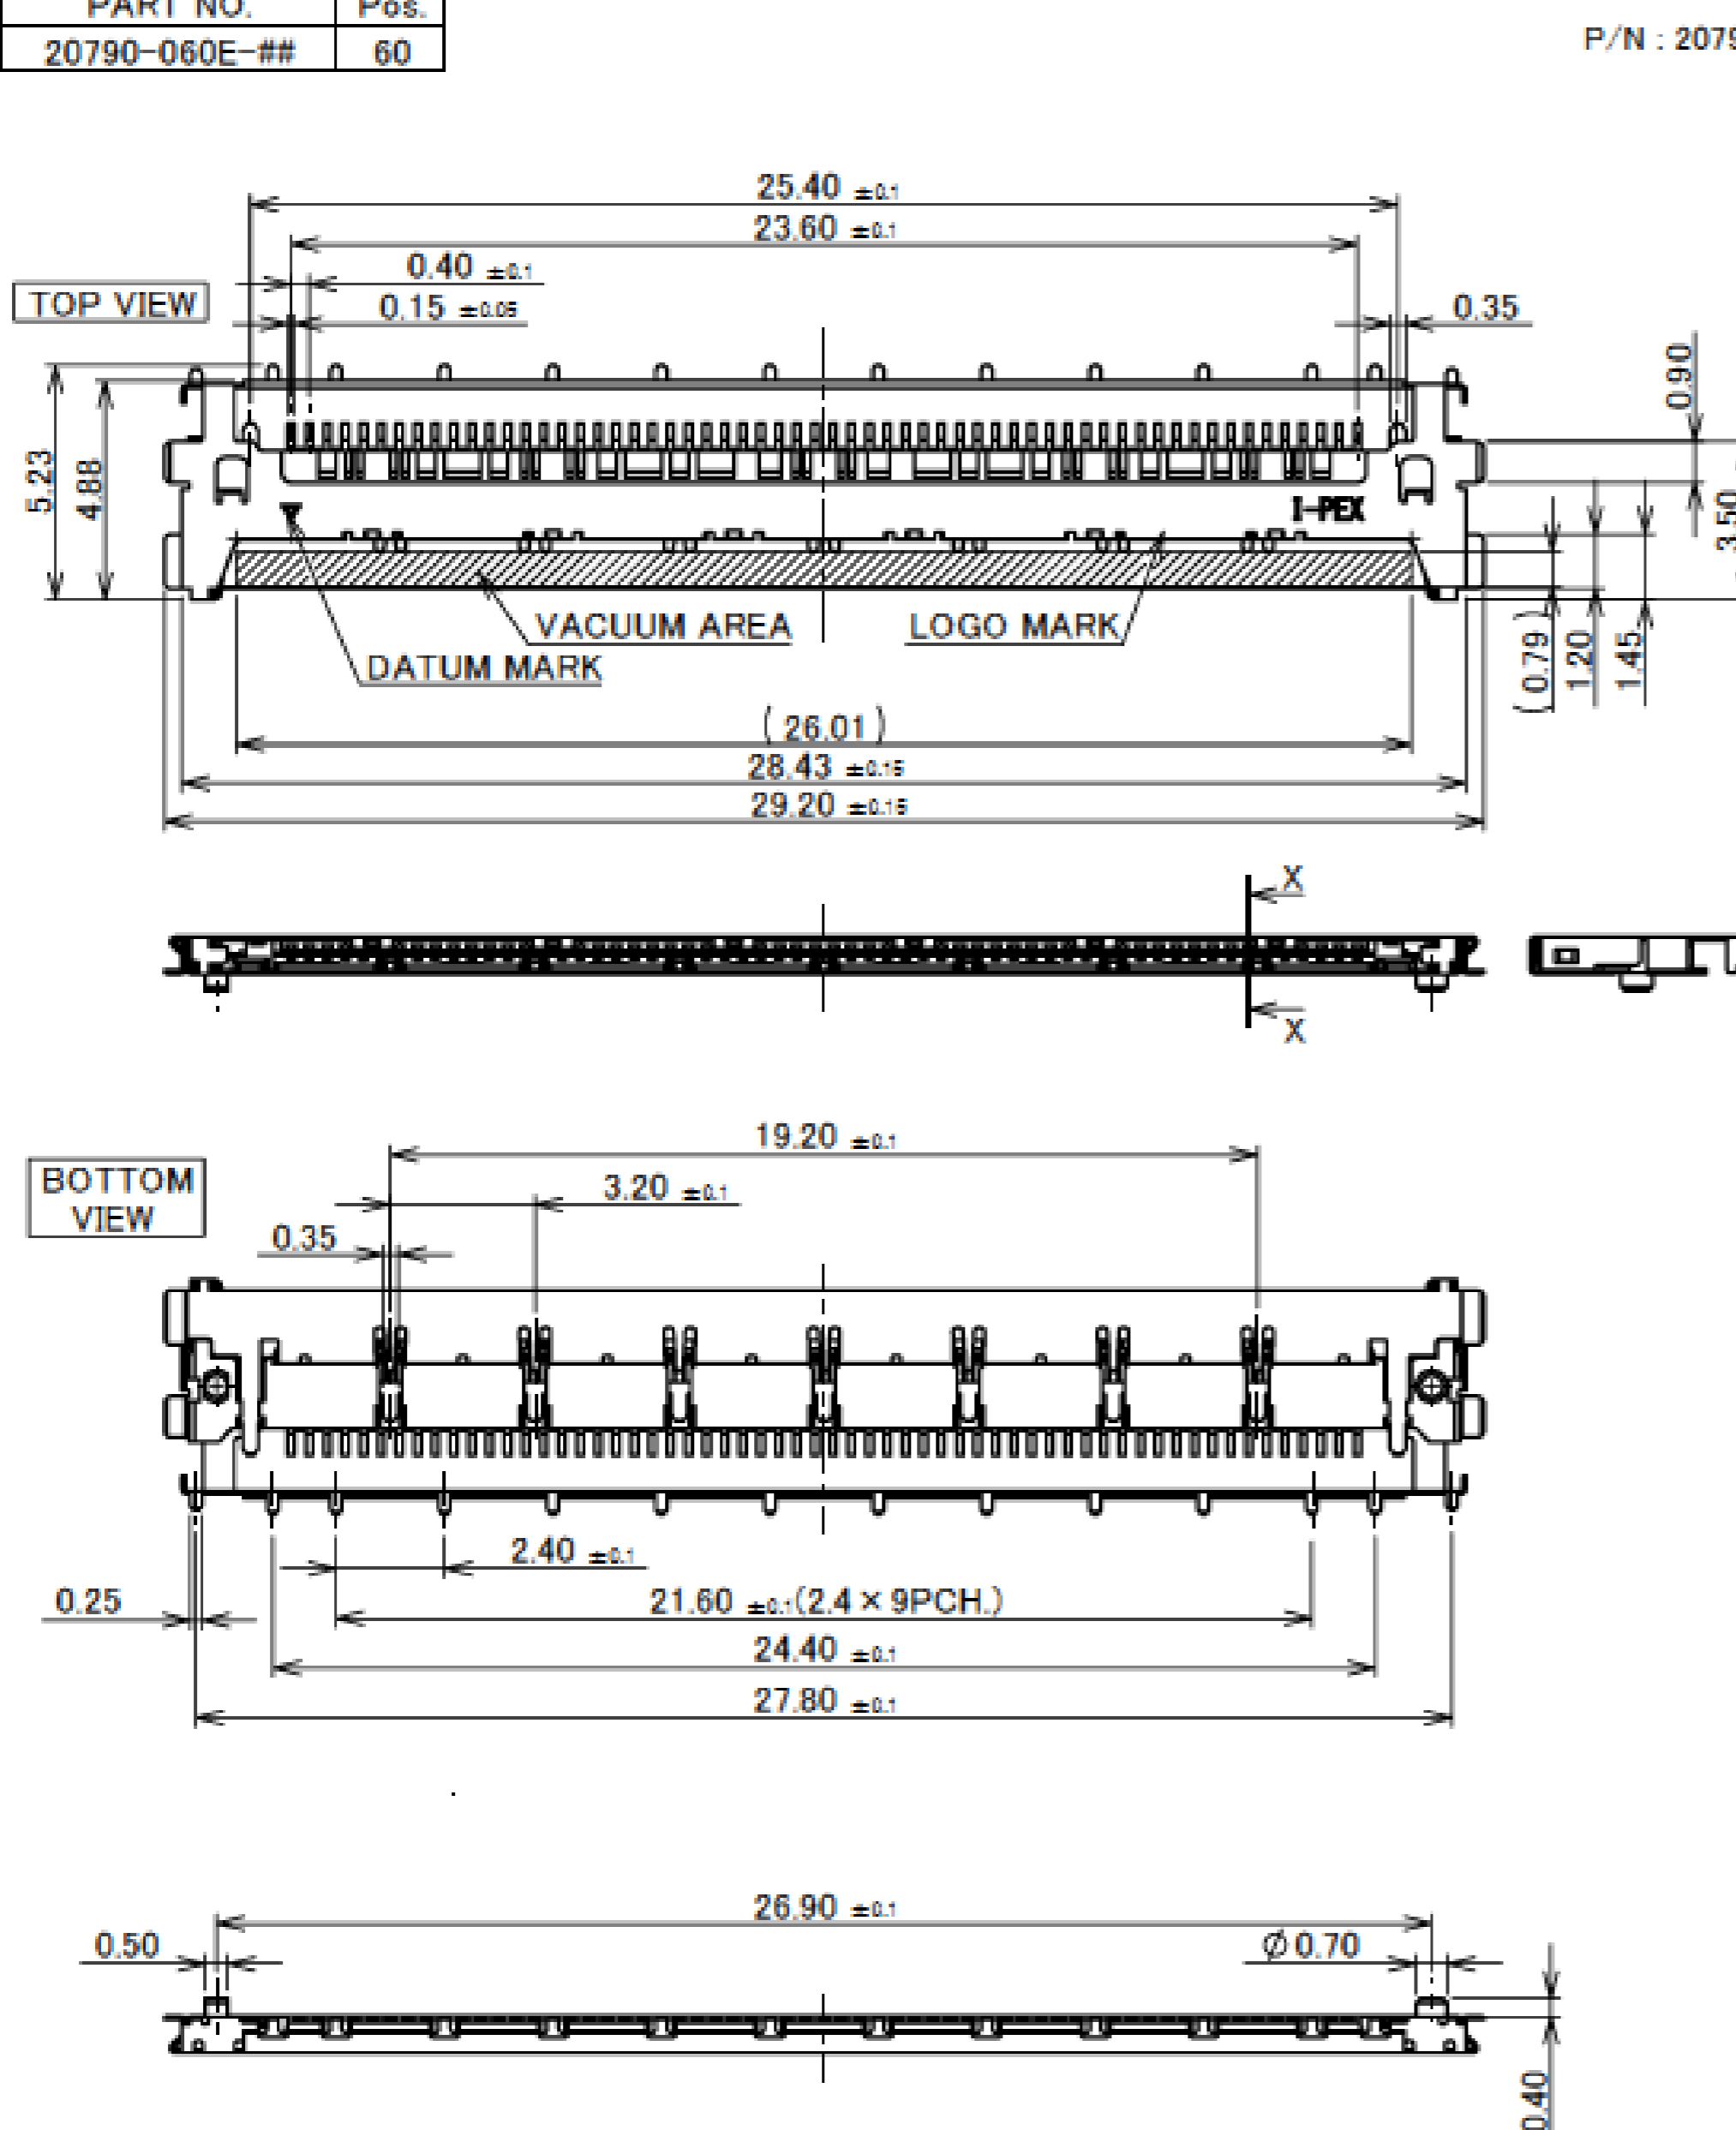

P/N : 20790-0\*\*E-##  
 1 : WITH BOSS  
 2 : WITHOUT BOSS  
 SEE TABLE 1  
 Pos.

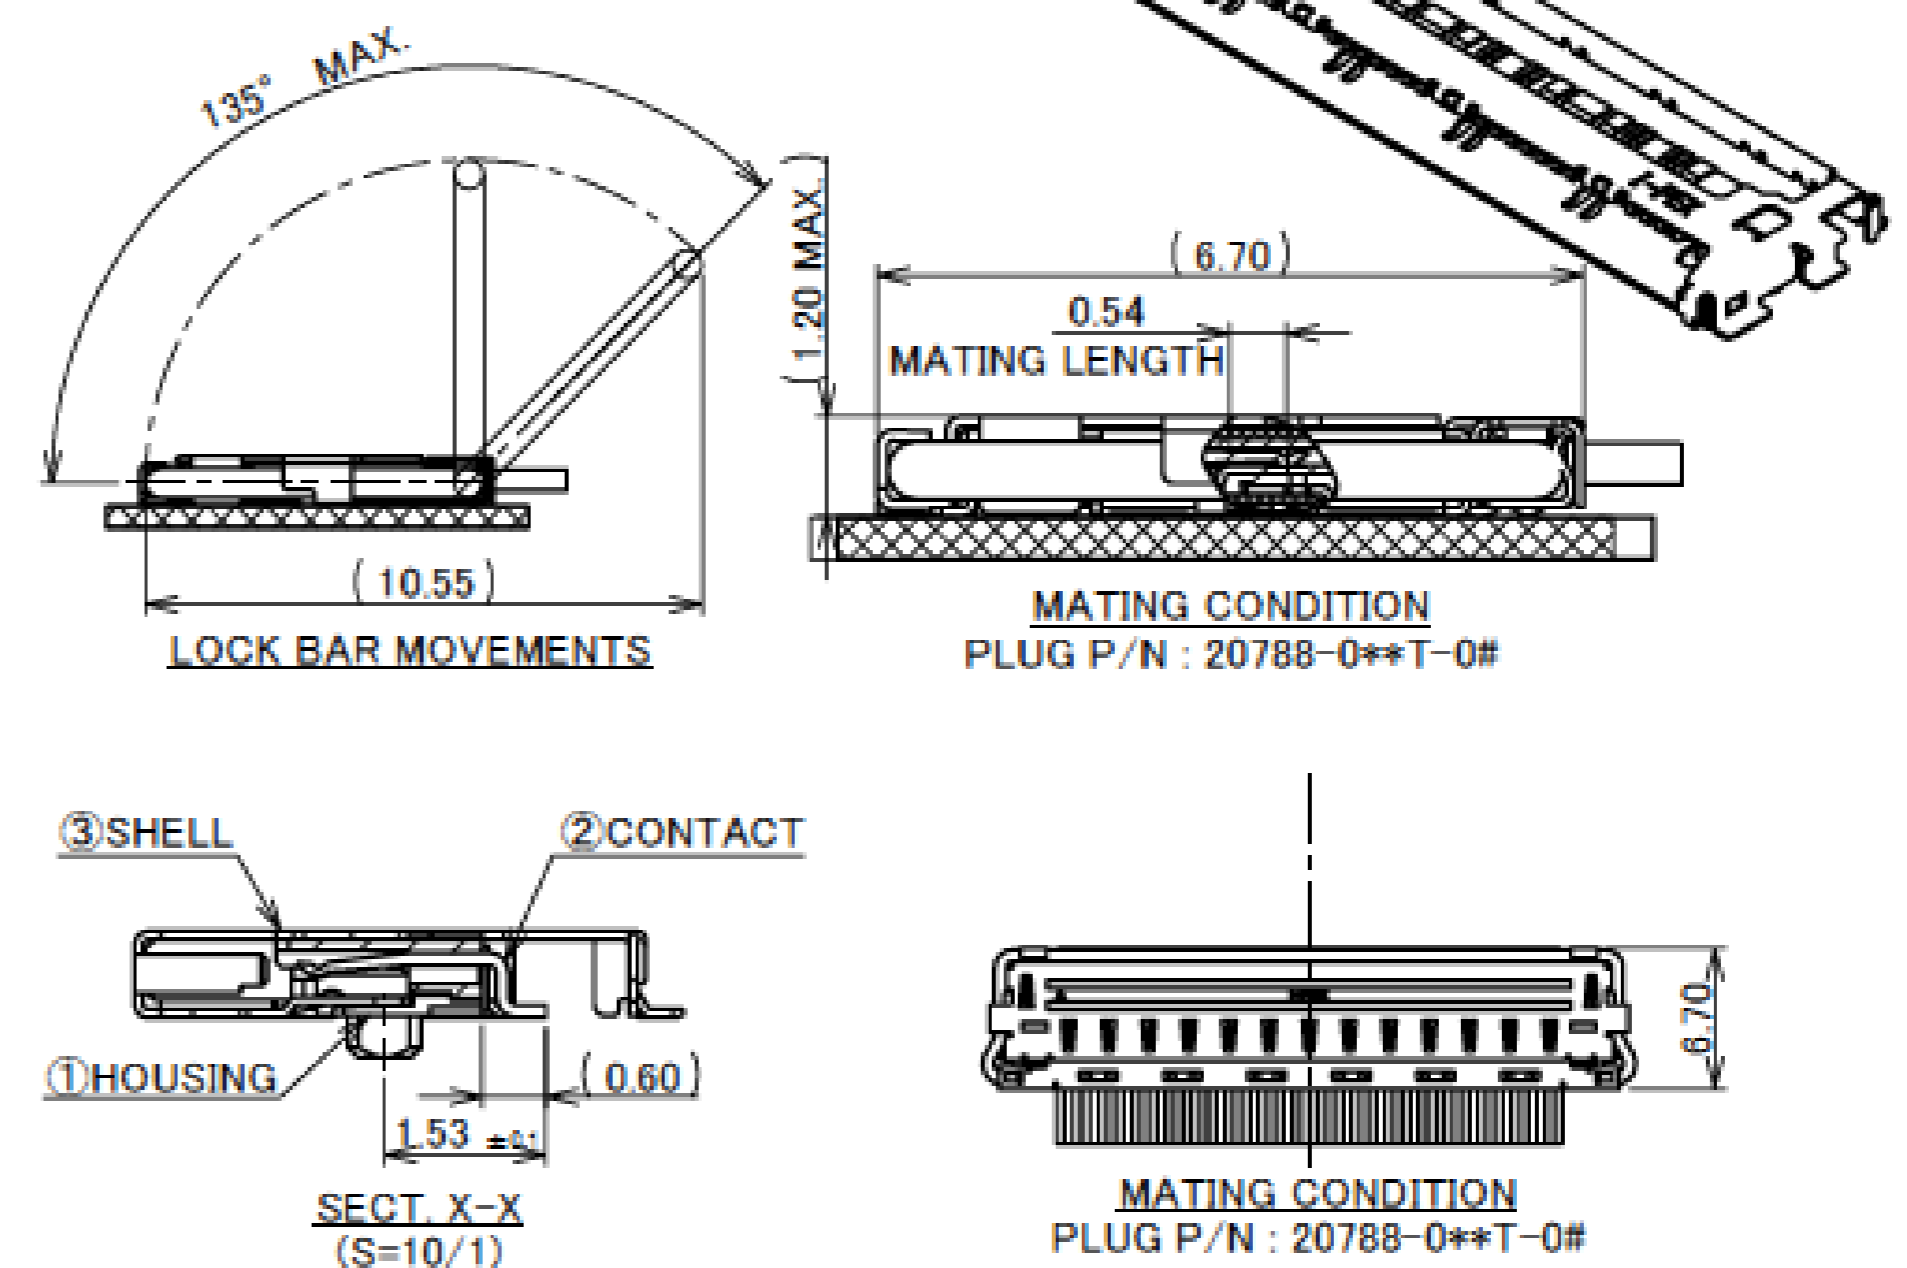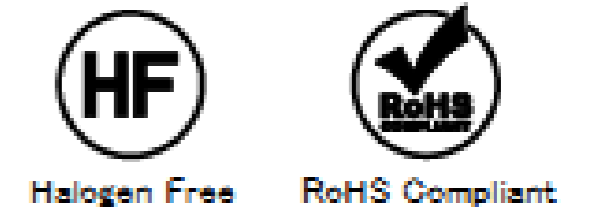


PART NO.	CONTACT FINISH
20790-0**E-0#	CONTACT & SOLDERING AREA : Au 0.03 $\mu$ m MIN. OVER Ni 1.00 $\mu$ m MIN.
20790-0**E-1#	CONTACT AREA : Au 0.38 $\mu$ m MIN. OVER Ni 1.00 $\mu$ m MIN. SOLDERING AREA : Au 0.03 $\mu$ m MIN. OVER Ni 1.00 $\mu$ m MIN.


3	SHELL	PHOSPHOR BRONZE	ALL OVER Ni 1.00 $\mu$ m MIN. SOLDERING AREA : Au 0.03 $\mu$ m MIN.
2	CONTACT	PHOSPHOR BRONZE	SEE TABLE 1
1	HOUSING	LCP	UL94V-0 .BLACK
NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS

Rev.13

# Receptacle Assembly

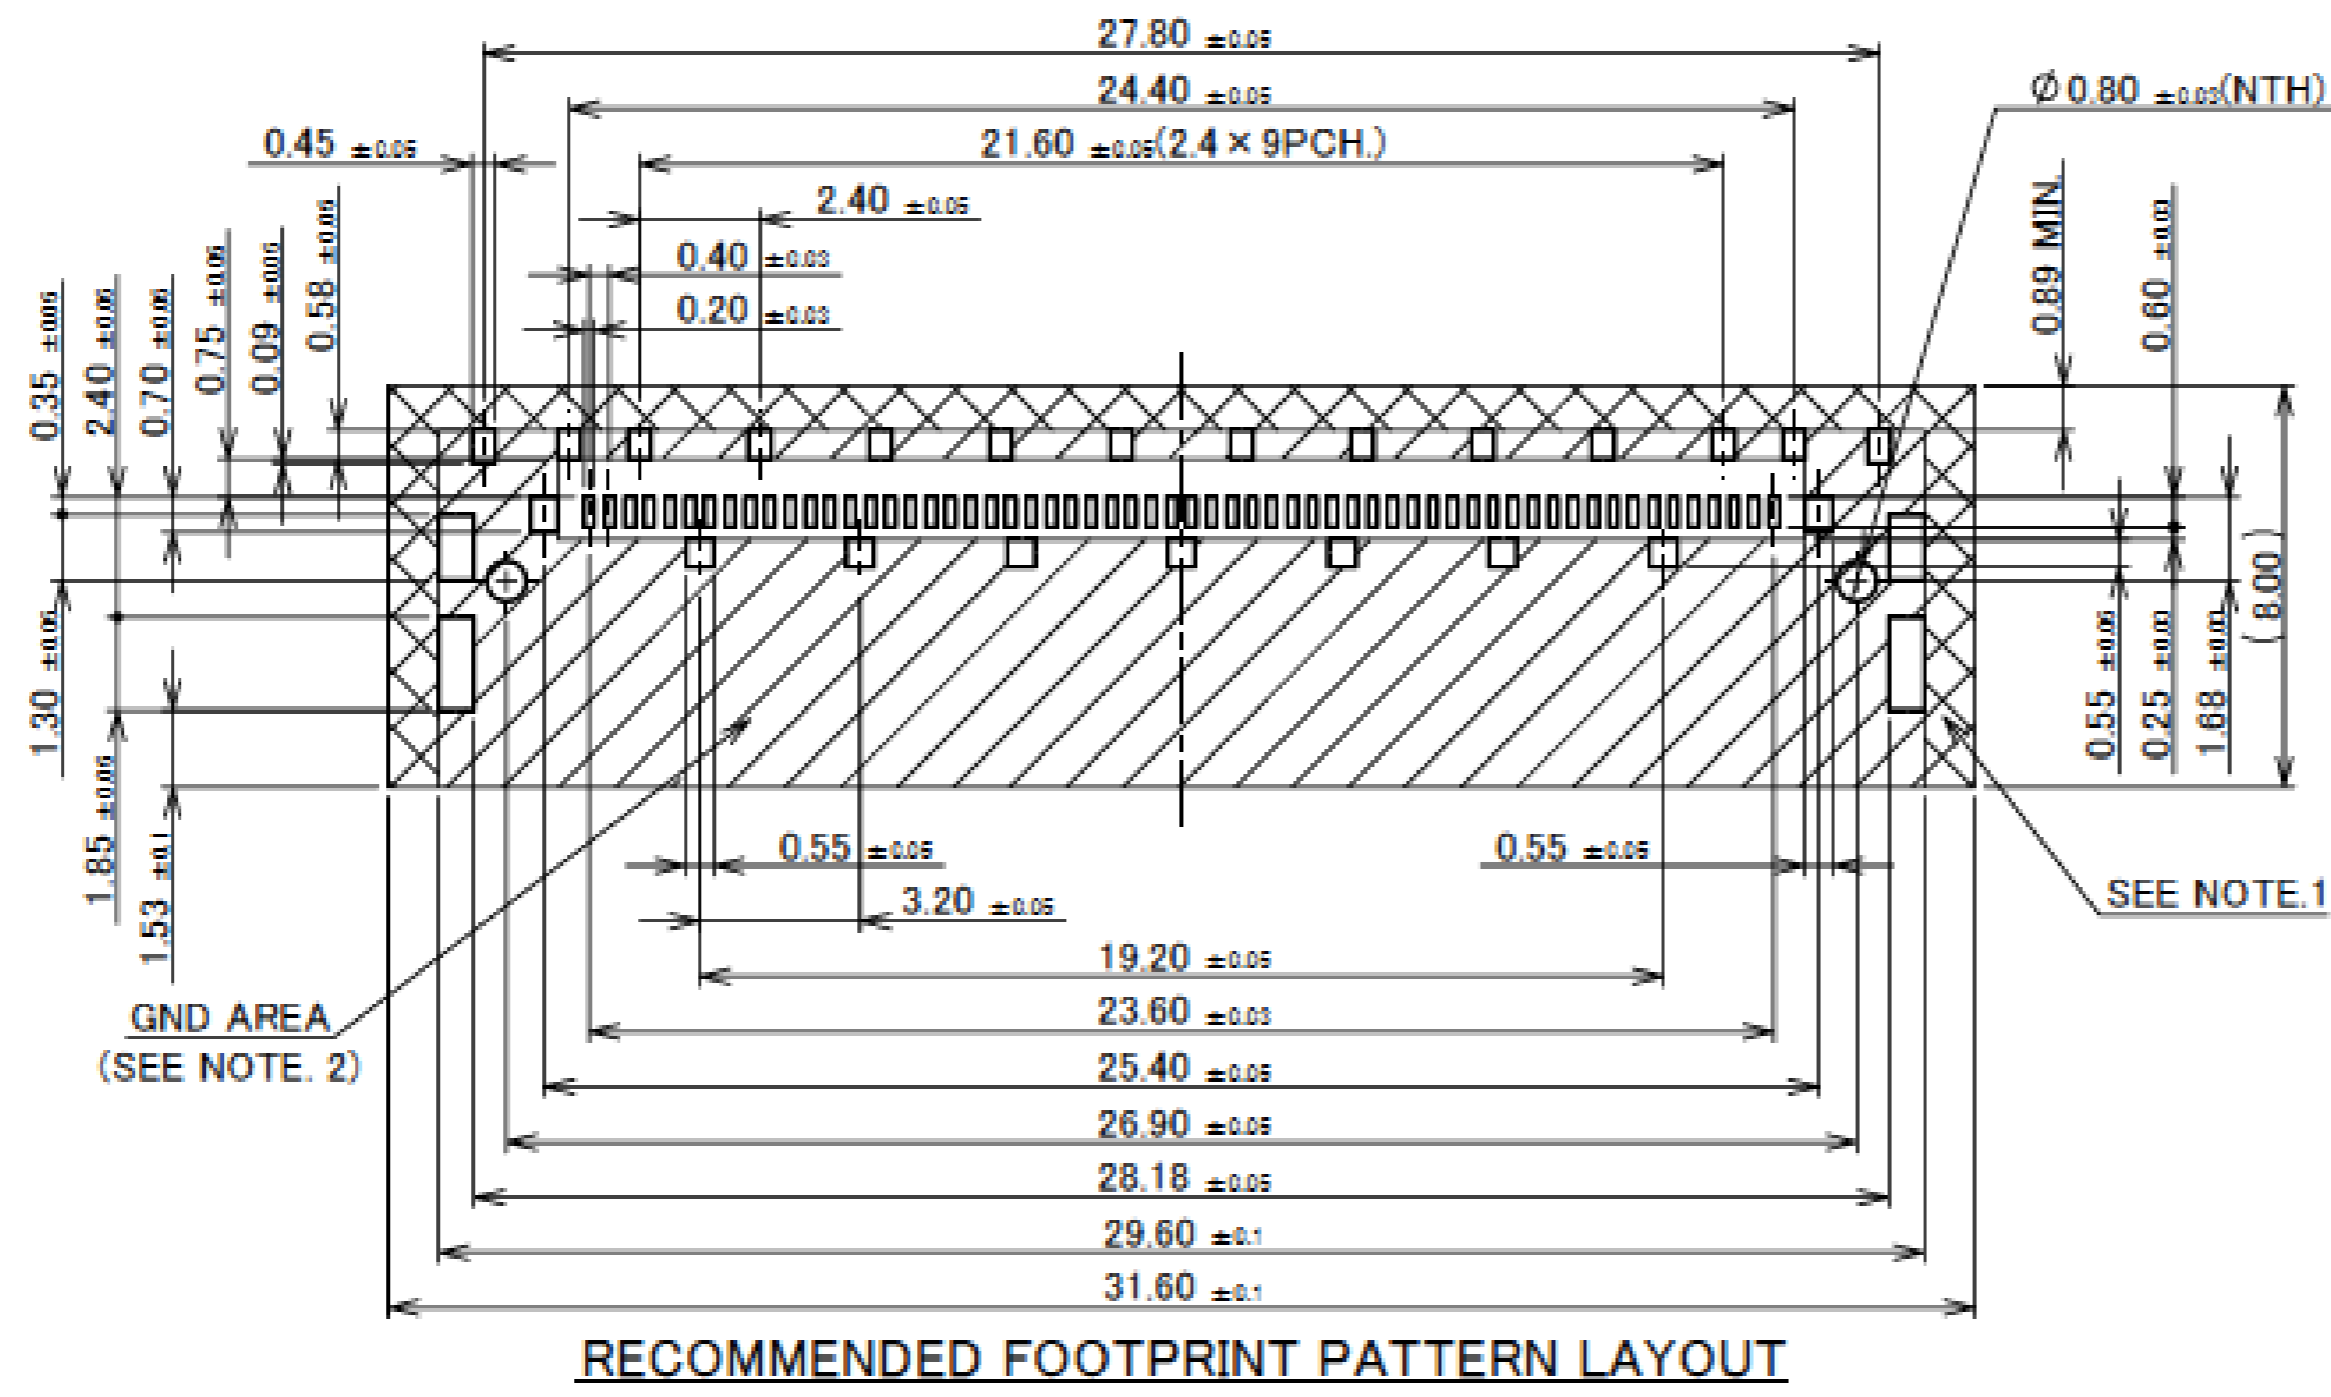


RECOMMENDED FOOTPRINT PATTERN LAYOUT

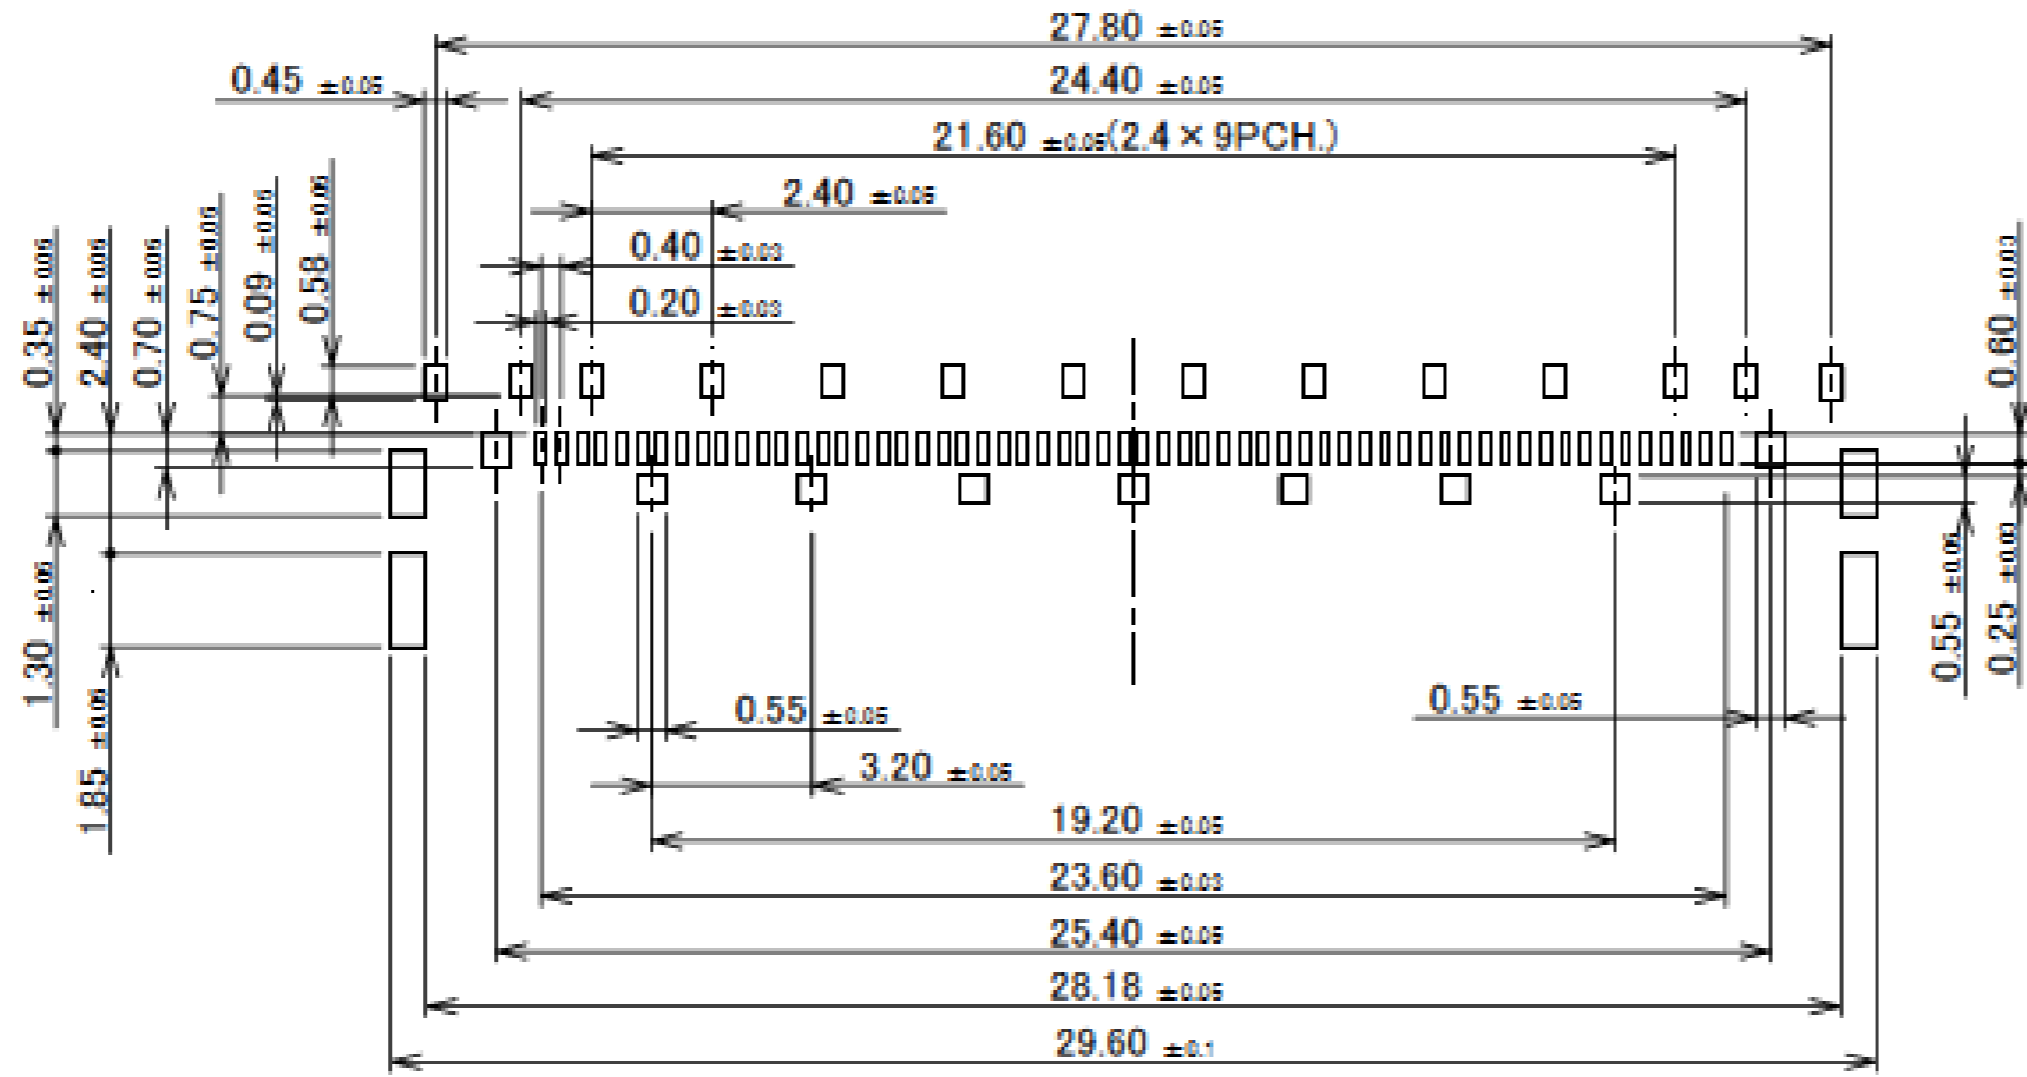


RECOMMENDED METAL MASK LAYOUT  
METAL MASK THICKNESS : t=0.12mm

- NOTES:  
1. DO NOT MOUNT ANOTHER COMPONENT IN THIS AREA.  
2. SOLDER RESIST MUST BE APPLIED TO THIS AREA.

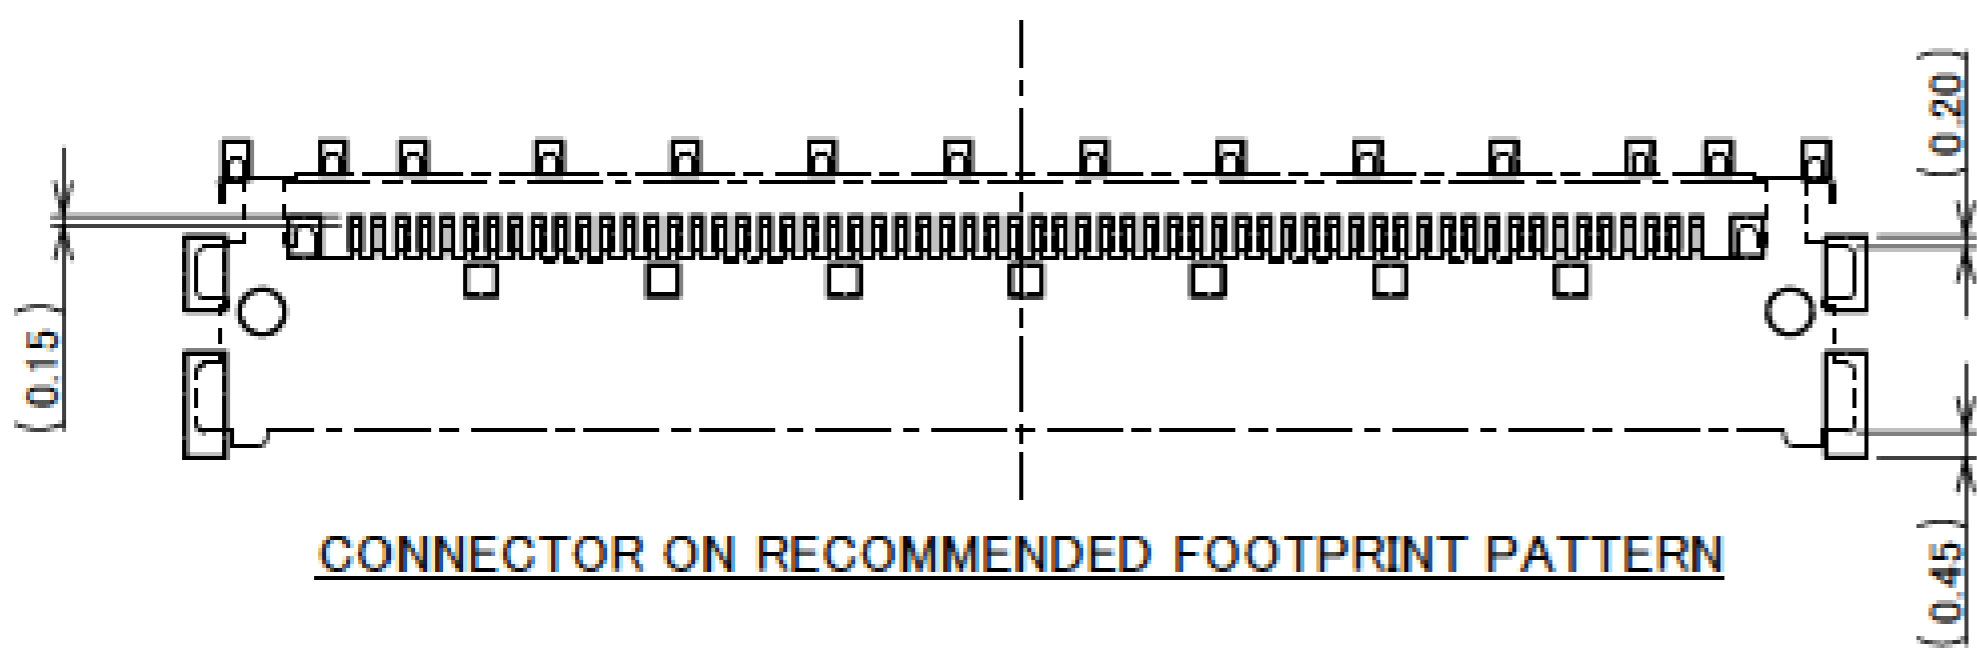

CONNECTOR ON RECOMMENDED FOOTPRINT PATTERN

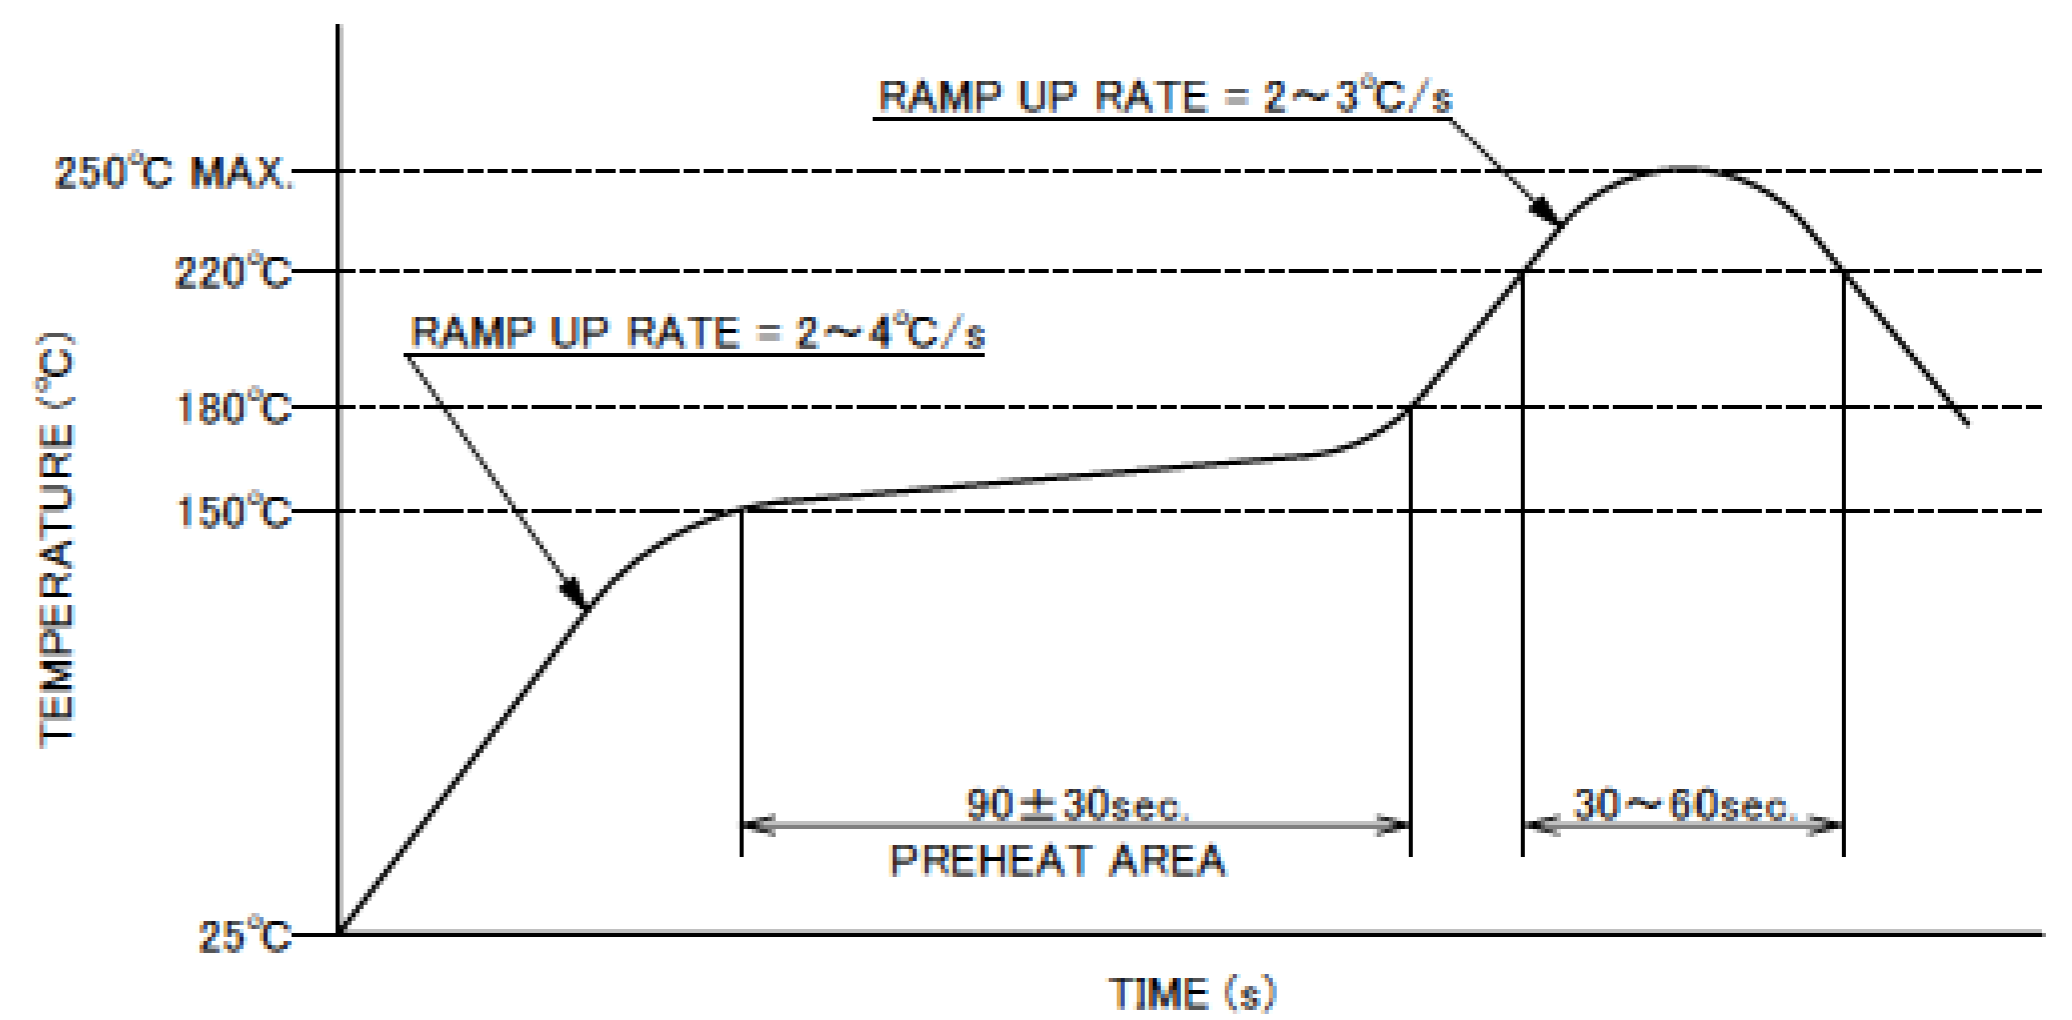

REFLOW TEMPERATURE PROFILE  
SENJU METAL INDUSTRY CO., LTD. : M705-SHF(Sn96.5 Ag3.0 Cu0.5)

Rev.13

ITEMS	SPECIFICATION
APPLICABLE CABLE	MICRO-COAXIAL CABLE : AWG# 44 , 42 , 40 , 38 , 36 DISCRETE WIRE : AWG# 36 , 34 TWINAX CABLE : AWG# 40 , 42
RATING VOLTAGE	100V AC (PER CONTACT PIN)
RATING AMPERAGE (FOR CONTACT)	0.1A AC/DC [AWG#44] PER CONTACT PIN / UP TO 60 CONTACTS 0.24A AC/DC [AWG#42] PER CONTACT PIN / UP TO 60 CONTACTS 0.3A AC/DC [AWG#40] PER CONTACT PIN / UP TO 60 CONTACTS 0.5A AC/DC [AWG#38] PER CONTACT PIN / UP TO 18 CONTACTS 0.8A AC/DC [AWG#36] PER CONTACT PIN / UP TO 6 CONTACTS 1.0A AC/DC [AWG#34] PER CONTACT PIN / UP TO 6 CONTACTS ※TESTING BY REAL MACHINE IS RECOMMENDED BECAUSE TEMPERATURE RISE MAY AFFECTED BY ACTUAL SITUATION
OPERATING TEMPERATURE	248~378K(-40°C~105°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENDING)
CONTACT RESISTANCE	INITIAL : 180mohm MAX.(AWG#34) / AFTER TEST : $\triangle$ 40mohm MAX. 275mohm MAX.(AWG#36) 360mohm MAX.(AWG#38) 600mohm MAX.(AWG#40) 700mohm MAX.(AWG#42) 1080mohm MAX.(AWG#44)
GROUND SHELL RESISTANCE	INITIAL : 50mohm MAX. / AFTER TEST : $\triangle$ 40mohm MAX.
INSULATION RESISTANCE	INITIAL : 1000Mohm MIN. / AFTER TEST : 500Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	30 CYCLES
MATING FORCE (INITIAL / AFTER 30 CYCLES)	29.10N MAX.
UN-MATING FORCE (INITIAL / AFTER 30 CYCLES)	6.0N MIN.
CABLE RETENTION FORCE	29.40N MIN.
PRODUCT SPECIFICATION	PRS-2261
TEST REPORT	TR-16075, TR-23031
INSTRUCTION MANUAL	HIM-16028
ASSEMBLY MANUAL	ASM-16004
APPEARANCE CRITERIA NO.	QLS-A***

Rev.13


# Custom Connectors Available

 RF Connector

MHF® series



CABLINÉ® series  
Micro-coaxial/Twinax/  
Discrete Wire Connector

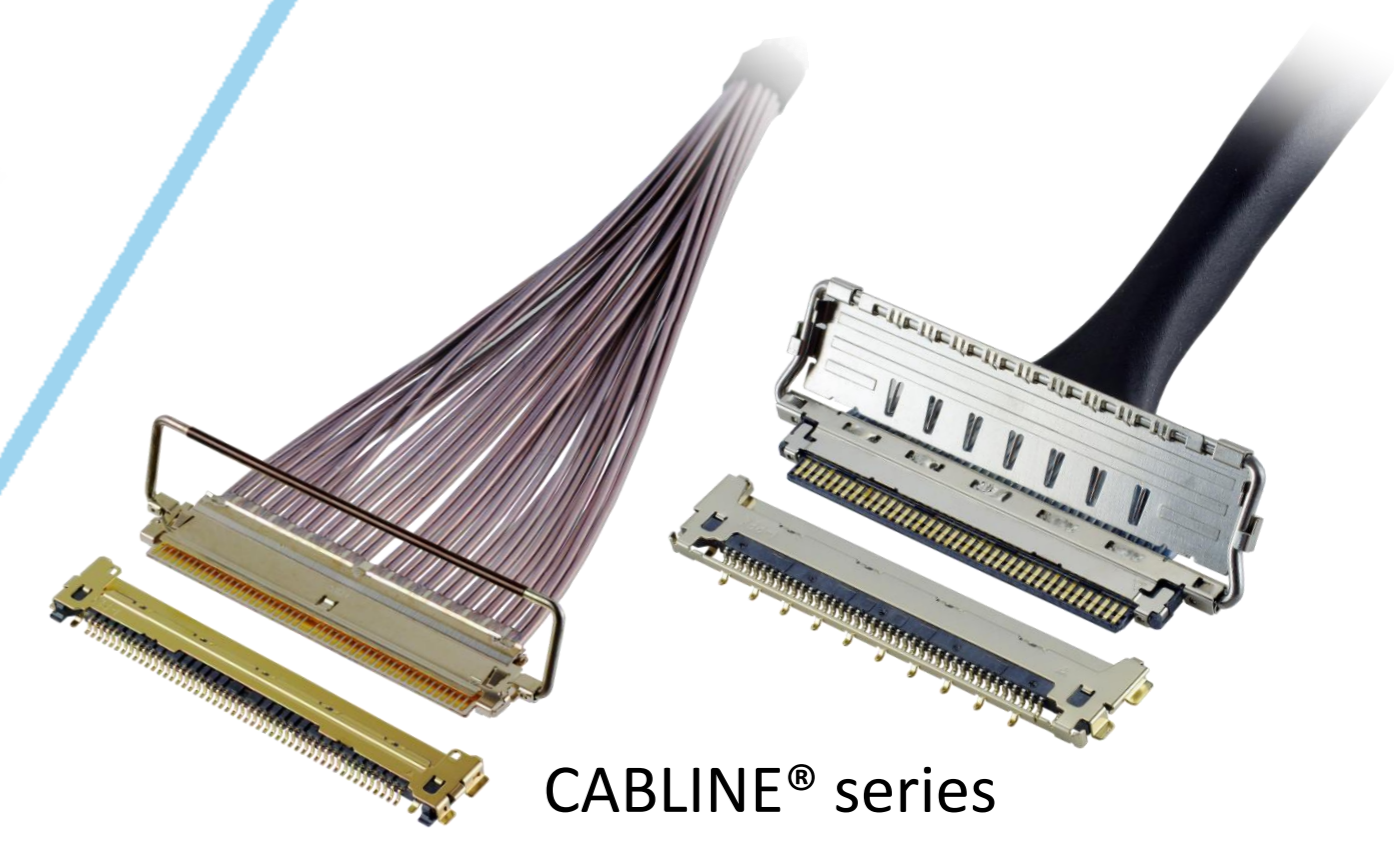

Optical Module


LIGHTPASS® series



NOVASTACK® series



Board-to-Board Connector

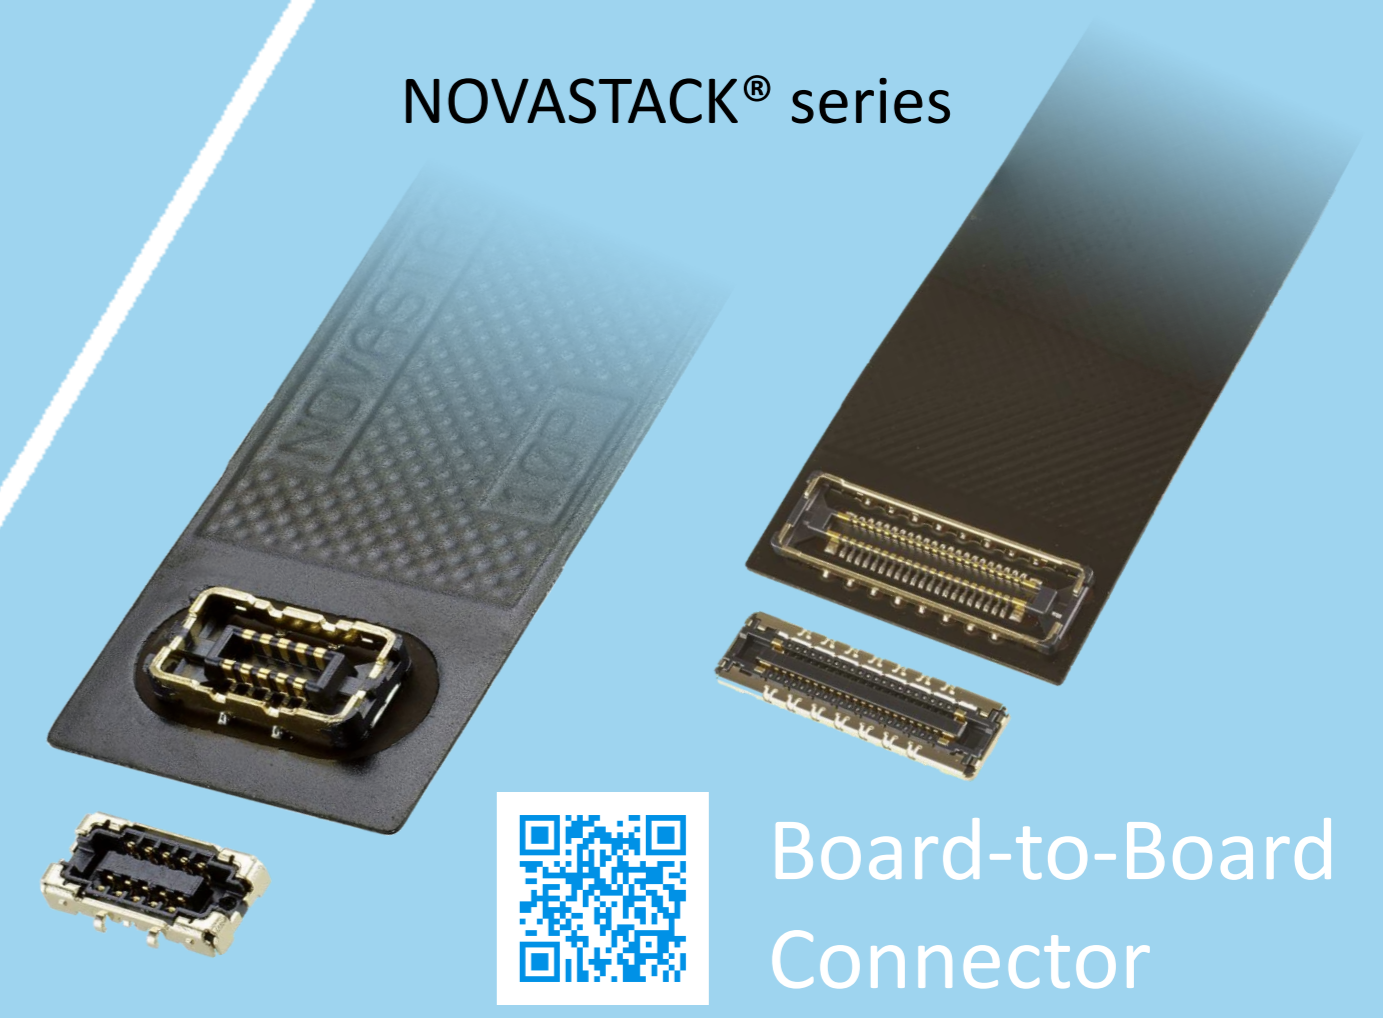

Power Connector/  
Terminal

AP series

ISH® series



MINIFLEX® series

EVAFLEX® series



FPC FFC Connector




Inquiry



MINIDOCK® series



I/O Connector

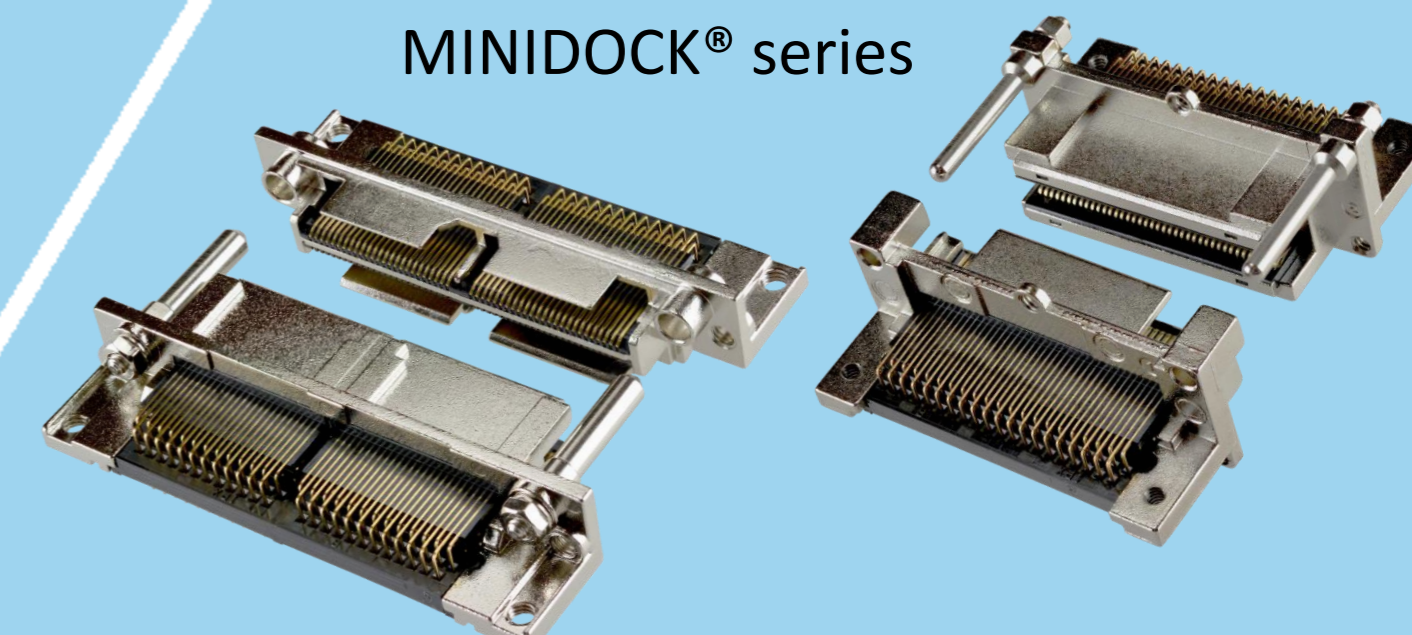

I-PEX, MHF, CABLINE, LIGHTPASS, NOVASTACK, ISH, IARPB, MINIFLEX, EVAFLEX, MINIDOCKS and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative or more detailed information.

[www.i-pex.com](http://www.i-pex.com)



# I-PEX

© I-PEX Inc. 2024  
All rights reserved