

# CABLINE®-UM

# The simulation of passing PLUG through hinge

Part No. Plug: 20877-0\*\*T-0#

## Technical Report

1	R23208	2023/05/10	K. Baba	R. Takei	H. Ikari
0	R21108	2021/02/19	S. Yamaguchi	-	H. Ikari
Rev.	ECN	Date	Prepared by	Checked by	Approved by

## CABLINE-UM The simulation of passing PLUG through hinge

### 1. Purpose

We report the simulation results of the minimum diameter of the hinge that can store the connector(CABLINE-UM Plug) and cable.

#### 2. Simulation conditions

Connector: CABLINE-UM PLUG CABLE ASS'Y (20877-0\*\*T-0#)

★The simulation was performed at 20877-0 \*\* T-01. -02 and -03 have the same result as -01.

Number of pins: 40P, 30P

Cable: MICRO-COAX CABLE AWG#38,40,42,44 (See Table.1 for jacket diameter)


★ Each simulation is connected to all Pins.


Bonding: CABLINE-UM recommends bonding cable outlets.

Be sure to bend the cable from the end of the bonding.

### Table.1 Cable jacket(outer) diameter (mm)

	AWG#	Impedance matching			
	AVVG#	45ohm	50ohm		
	38	0.39			
	40	0.33	0.37		
	42	0.29	0.33		
	44	0.24	0.26		

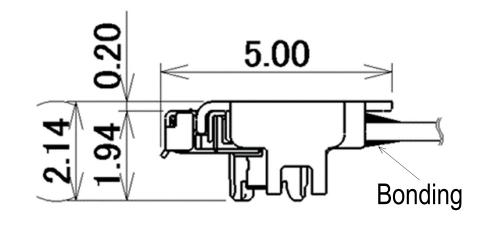

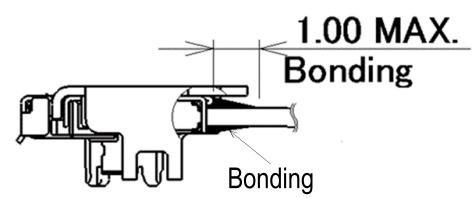

#### 3. Simulation result

The simulation results are shown in Table.2.

★See the next page for details.

**Table.2 Minimum hinge inner diameter (mm)** 

	Size	AWG#38	AWG#40		AWG#42		AWG#44	
Cable	Impedance matching	45ohm	45ohm	50ohm	45ohm	50ohm	45ohm	50ohm
	Jacket							
	diameter	0.39	0.33	0.37	0.29	0.33	0.24	0.26
Minimum	Connector							
	40P	6.16	6.10	6.14	6.06	6.10	6.01	6.03
hinge inner diameter	Connector							
ulametel	30P	6.16	6.10	6.14	6.06	6.10	6.01	6.03

3. Simulation result
Simulation results with AWG #38.

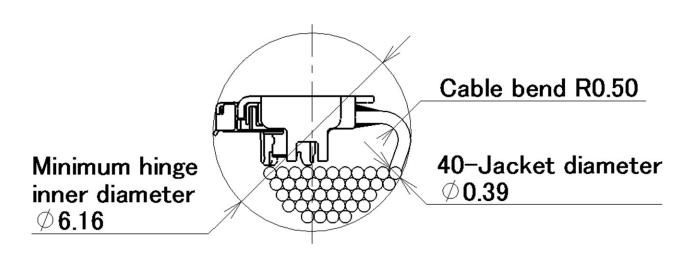


Fig.1 AWG#38 (45ohm) 40P

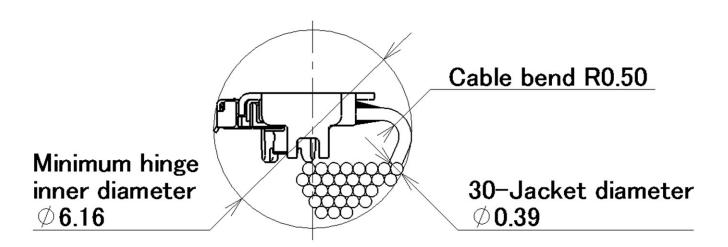


Fig.2 AWG#38 (45ohm) 30P

3. Simulation result
Simulation results with AWG #40.

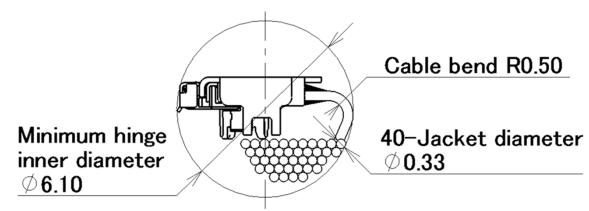


Fig.3 AWG#40 (45ohm) 40P

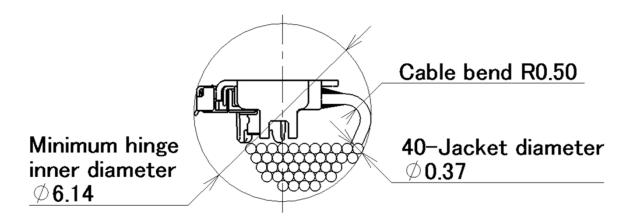


Fig.5 AWG#40 (50ohm) 40P

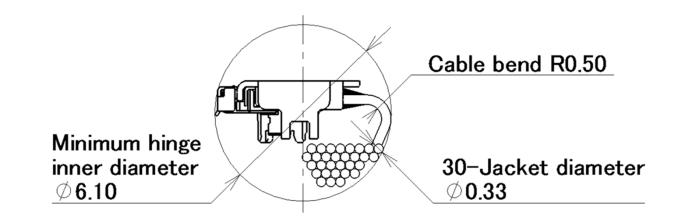


Fig.4 AWG#40 (45ohm) 30P

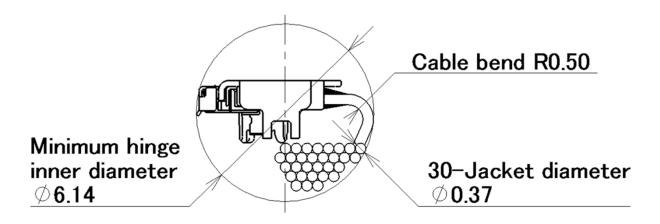


Fig.6 AWG#40 (50ohm) 30P

## CABLINE-UM The simulation of passing PLUG through hinge

3. Simulation result
Simulation results with AWG #42.

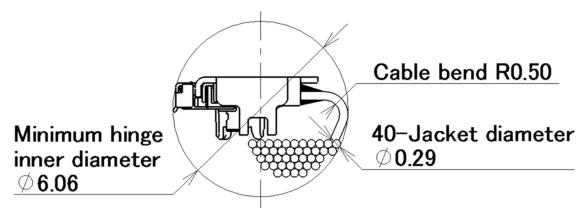


Fig.7 AWG#42 (45ohm) 40P

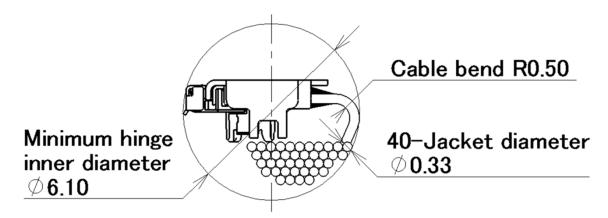


Fig.9 AWG#42 (50ohm) 40P

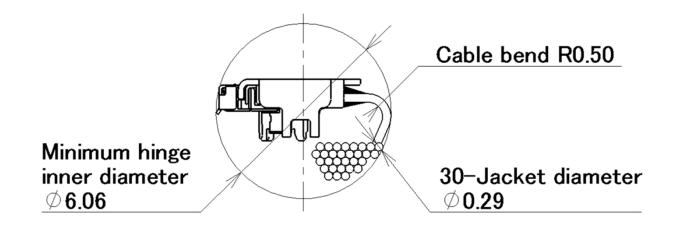


Fig.8 AWG#42 (45ohm) 30P

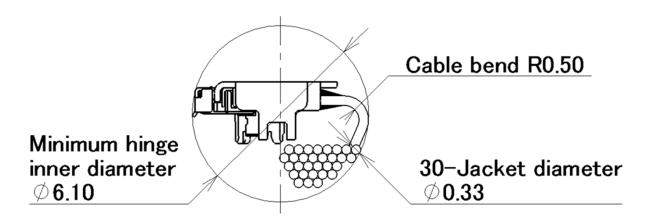


Fig.10 AWG#42 (50ohm) 30P

3. Simulation result
Simulation results with AWG #44.

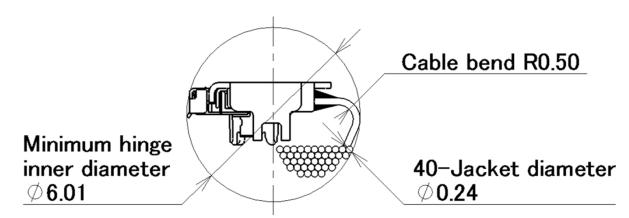


Fig.11 AWG#44 (45ohm) 40P

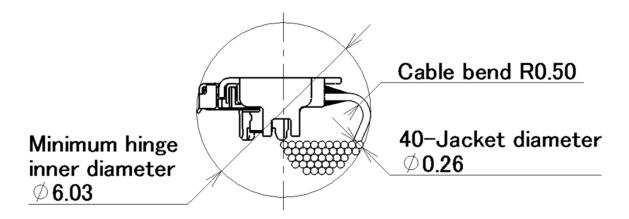


Fig.13 AWG#44 (50ohm) 40P

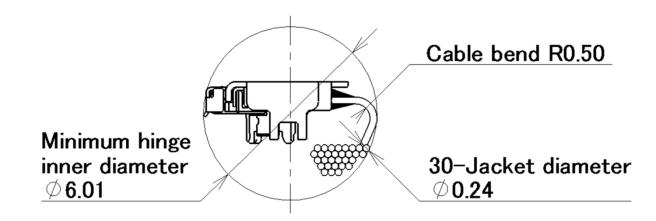


Fig.12 AWG#44 (45ohm) 30P

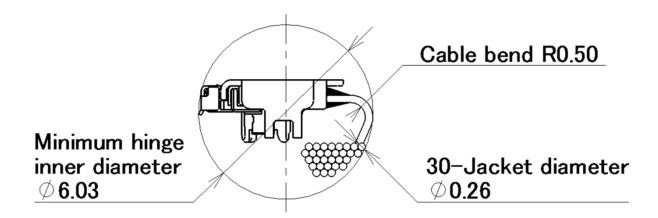


Fig.14 AWG#44 (50ohm) 30P

