

EVAFLEX® 5-HD

풀 쉴드, 고속 전송 대응, Auto-Lock, 수평 결합 타입, 0.5 mm pitch, 쉴드 FFC/FPC 커넥터



Product Specifications:

Board Pitch (mm)	0.5	
Wiping Length (mm)	1	
Size (mm)	Height	2.00 +/- 0.20
	Width	Formula: 5.2 + (0.5*?p)
	Depth	8.43 +/- 0.30
Pin counts	Range	10 - 40
	Available	24

Applicable FPC/FFC:

FPC/FFC Type	Shielded FFC & FPC
FPC/FFC Contact Point	Top
FPC/FFC Thickness (mm)	0.3 +/- 0.03 Contact 0.5 +/- 0.03 Ground

Applicable Standards (Reference Only):

USB4 (20 Gbps/lane) USB 3.1 Gen 2 (10 Gbps) USB 3.1 Gen 1 (5 Gbps) V-By-One HS 1.4 (4 Gbps)

*기재가 되어있지 않은 핀 수의 대응 여부에 대해서는 문의해 부탁드립니다.

▶ 멀티 그라운드 접점에 의한 ZenShield® 풀 쉴드로 EMI 대책

EVAFLEX 5-HD 24P "밀면이미지"

○ 납땜 접점부
○ Mechanical 접점부

○ FFC 그라운드Tape에서 PCB
○ SHELL에서 PCB

Wi-Fi® Antenna 5GHz

신호간섭 우려 ↔ 신호간섭 없음

USB 3.1 connection (10 Gbps ⇒ 5GHz equivalent)

▶ 고속 전송 설계 (10+ Gbps USB® 3.1 Gen 2)

Shell Contact Housing Lock cover Upper shell spring Lower shell spring Ground Signal Ground

Characteristic impedance (Differential) Tr = 40ps (20-80%)

Z 1,1 TDR 40ps 20-80%

Spec. : 100Ω
USB 3.1 (Gen2) Spec. / 90 Ohm±10Ω
Spec. : 80Ω

▶ 체결 작업이 용이한 Auto Lock 디자인. 수작업 또는 로봇에 의한 조립 작업에 최적

체결 프로세스 <One action>

<Position 1> FFC 삽입 <Position 2> FFC 체결 (One action Auto Lock)



SECT.X-X Lock구조

커넥터의 Lock부위에 FFC절개부가 체결됨

Component Parts Details

Connector Assembly



Recommended P/N		20952-0**E-02						
PART NO.	Pos.	A	B	C	D	E	F	G
20952-024E-02	24	15.84	17.04	17.20	14.20	10.00	11.50	15.00

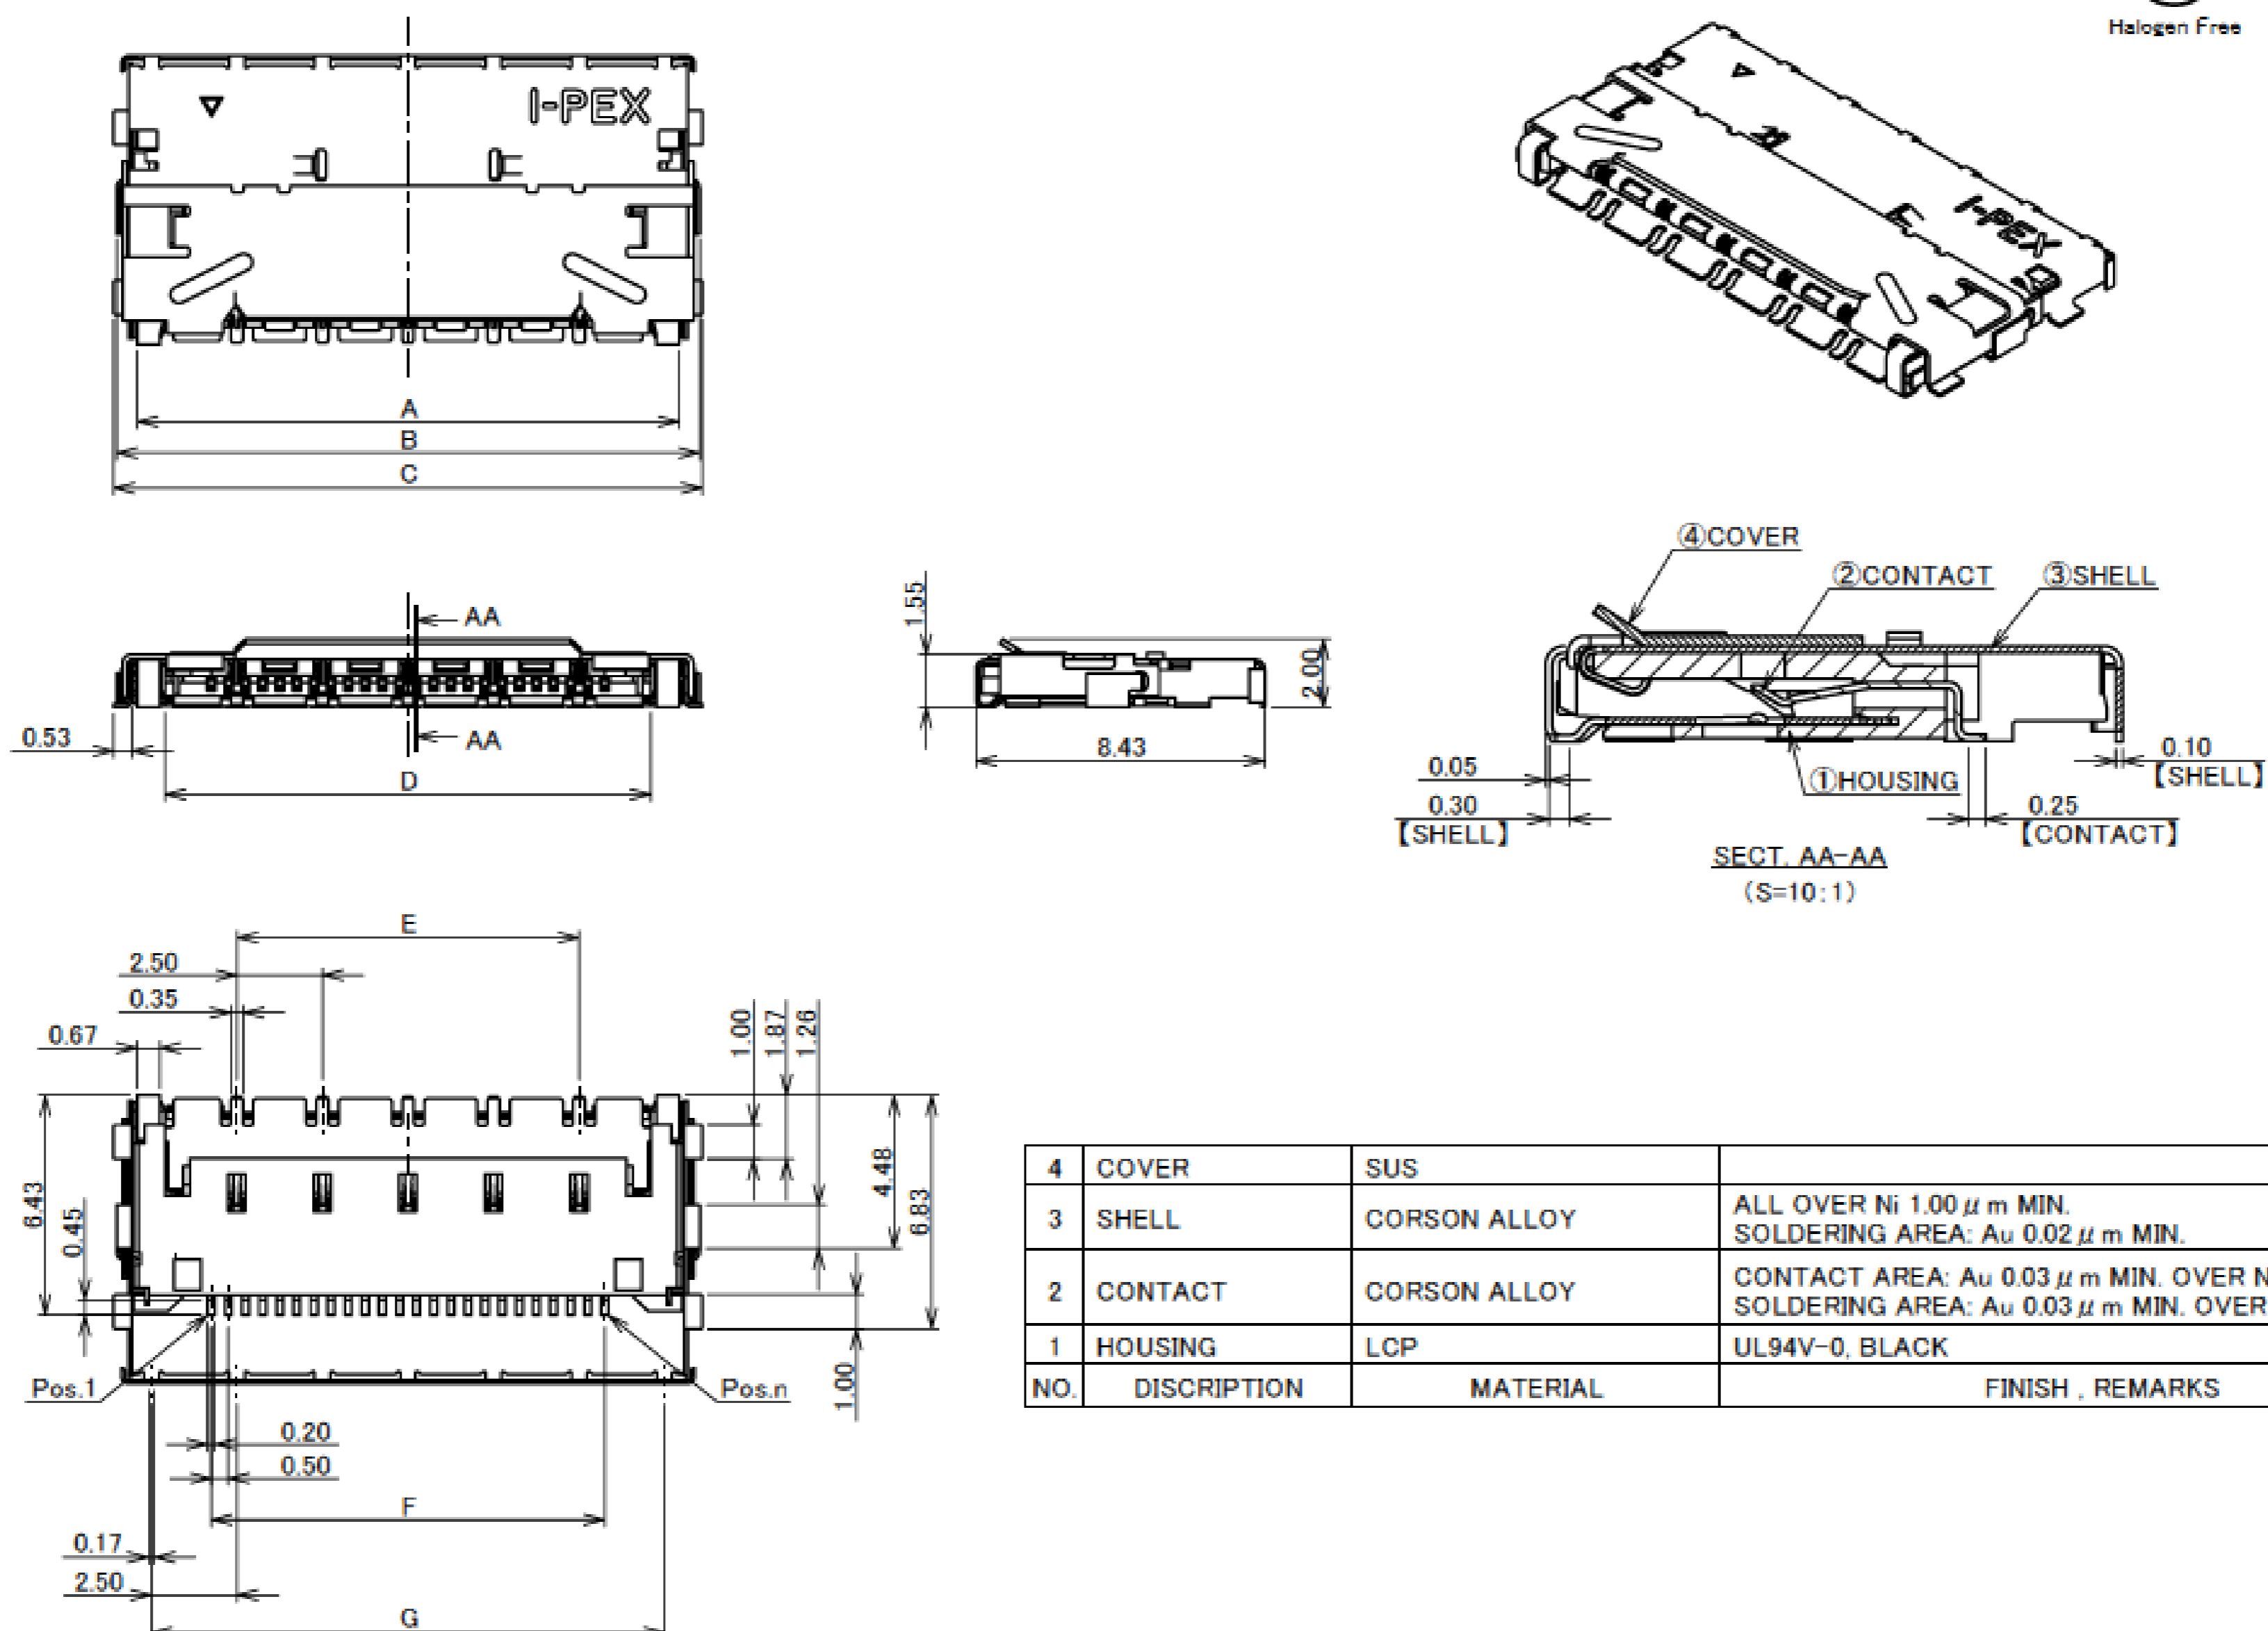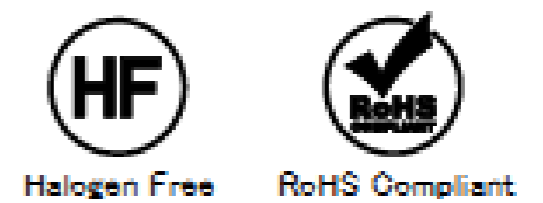

NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
4	COVER	SUS	
3	SHELL	CORSON ALLOY	ALL OVER Ni 1.00 μ m MIN. SOLDERING AREA: Au 0.02 μ m MIN.
2	CONTACT	CORSON ALLOY	CONTACT AREA: Au 0.03 μ m MIN. OVER Ni 1.00 μ m MIN. SOLDERING AREA: Au 0.03 μ m MIN. OVER Ni 1.00 μ m MIN.
1	HOUSING	LCP	UL94V-0, BLACK

Connector Assembly

PART NO.	Pos.	F	H	J
20952-024E-02	24	11.50	14.15	12.90

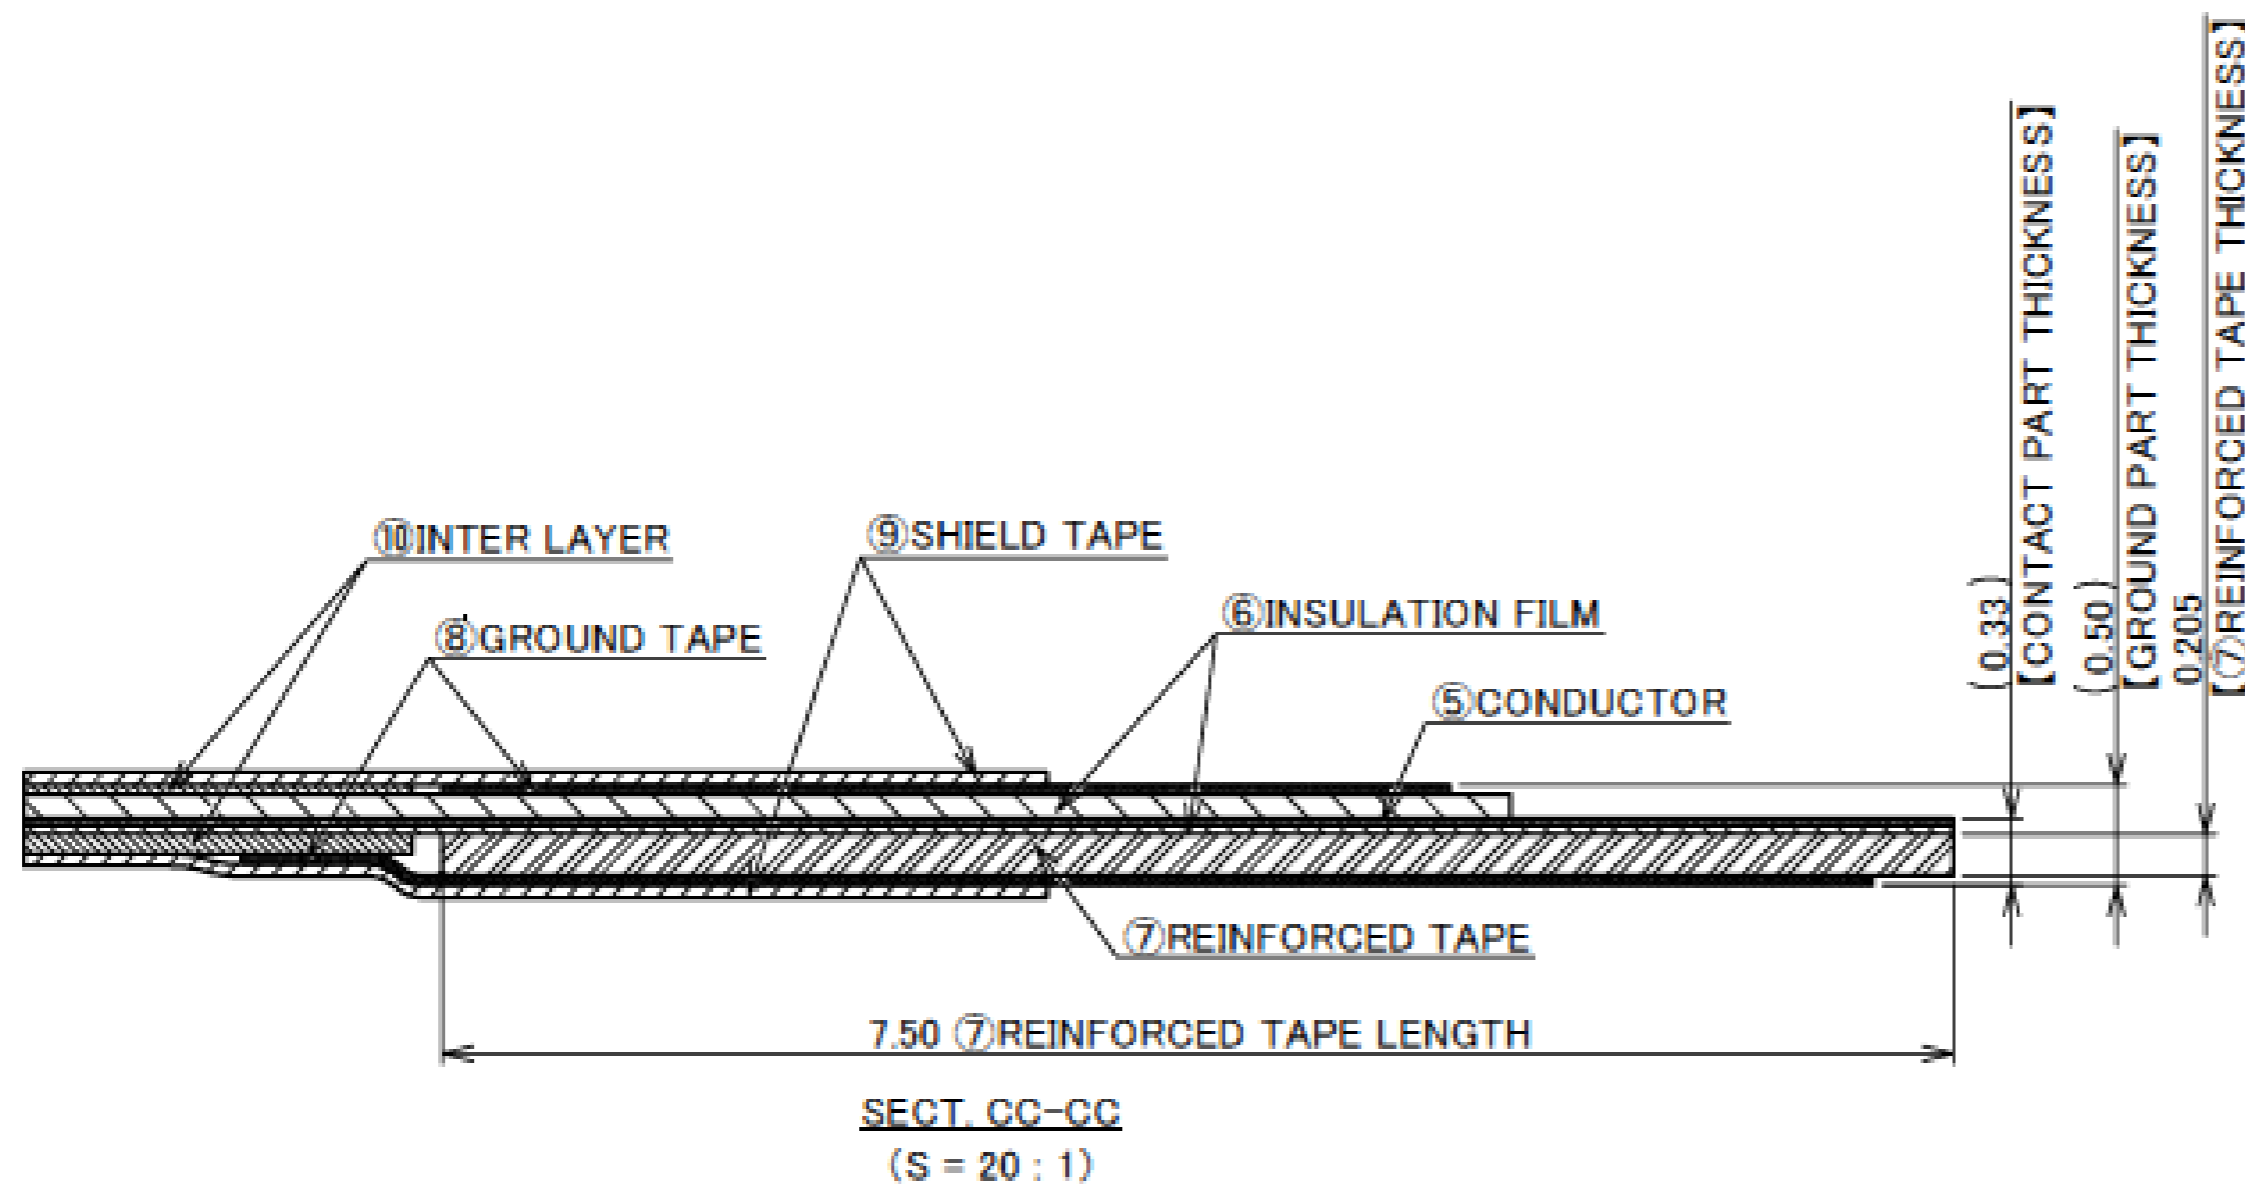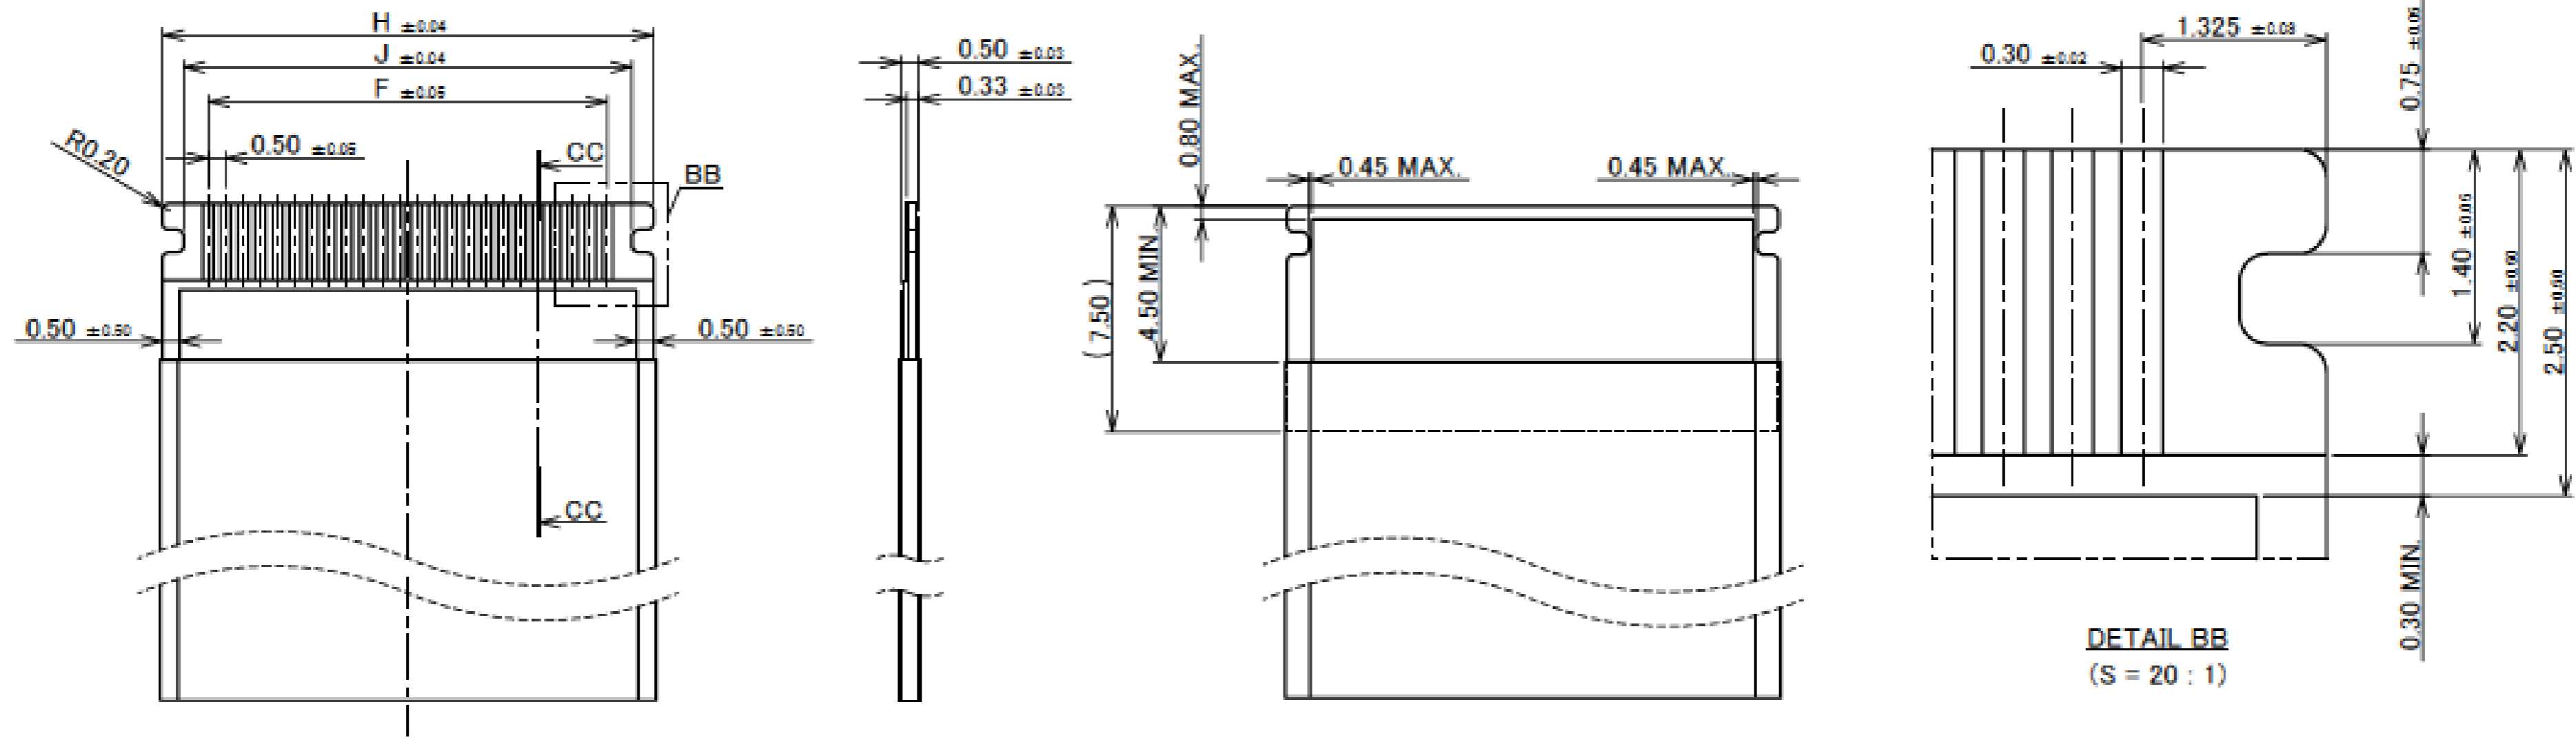


- NOTES.
1. DIFFERENTIAL IMPEDANCE : $90 \pm 10 \Omega$
 2. SELECT A MATERIAL WITH A SOFTENING TEMPERATURE OF 85°C OR HIGHER FOR THE PATTERN ADHESIVE PART OF FFC.

NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
10	INTER LAYER	ARBITRARY	
9	SHIELD TAPE	METALLIC FILM	
8	GROUND TAPE	METALLIC FILM	POLISH or HALF POLISH Sn PLATING
7	REINFORCED TAPE	ARBITRARY	
6	INSULATION FILM	ARBITRARY	
5	CONDUCTOR	COPPER ALLOY	CONTACT AREA : Au $0.05 \mu\text{m}$ MIN. OVER Ni $0.5 \mu\text{m}$ MIN.

Rev.5

Plug Housing Assembly

PART NO.	Pos.	E	F	G	K	L	M	N	P	Q
20952-024E-02	24	10.00	11.50	15.00	17.60	15.94	14.30	16.04	17.24	17.60


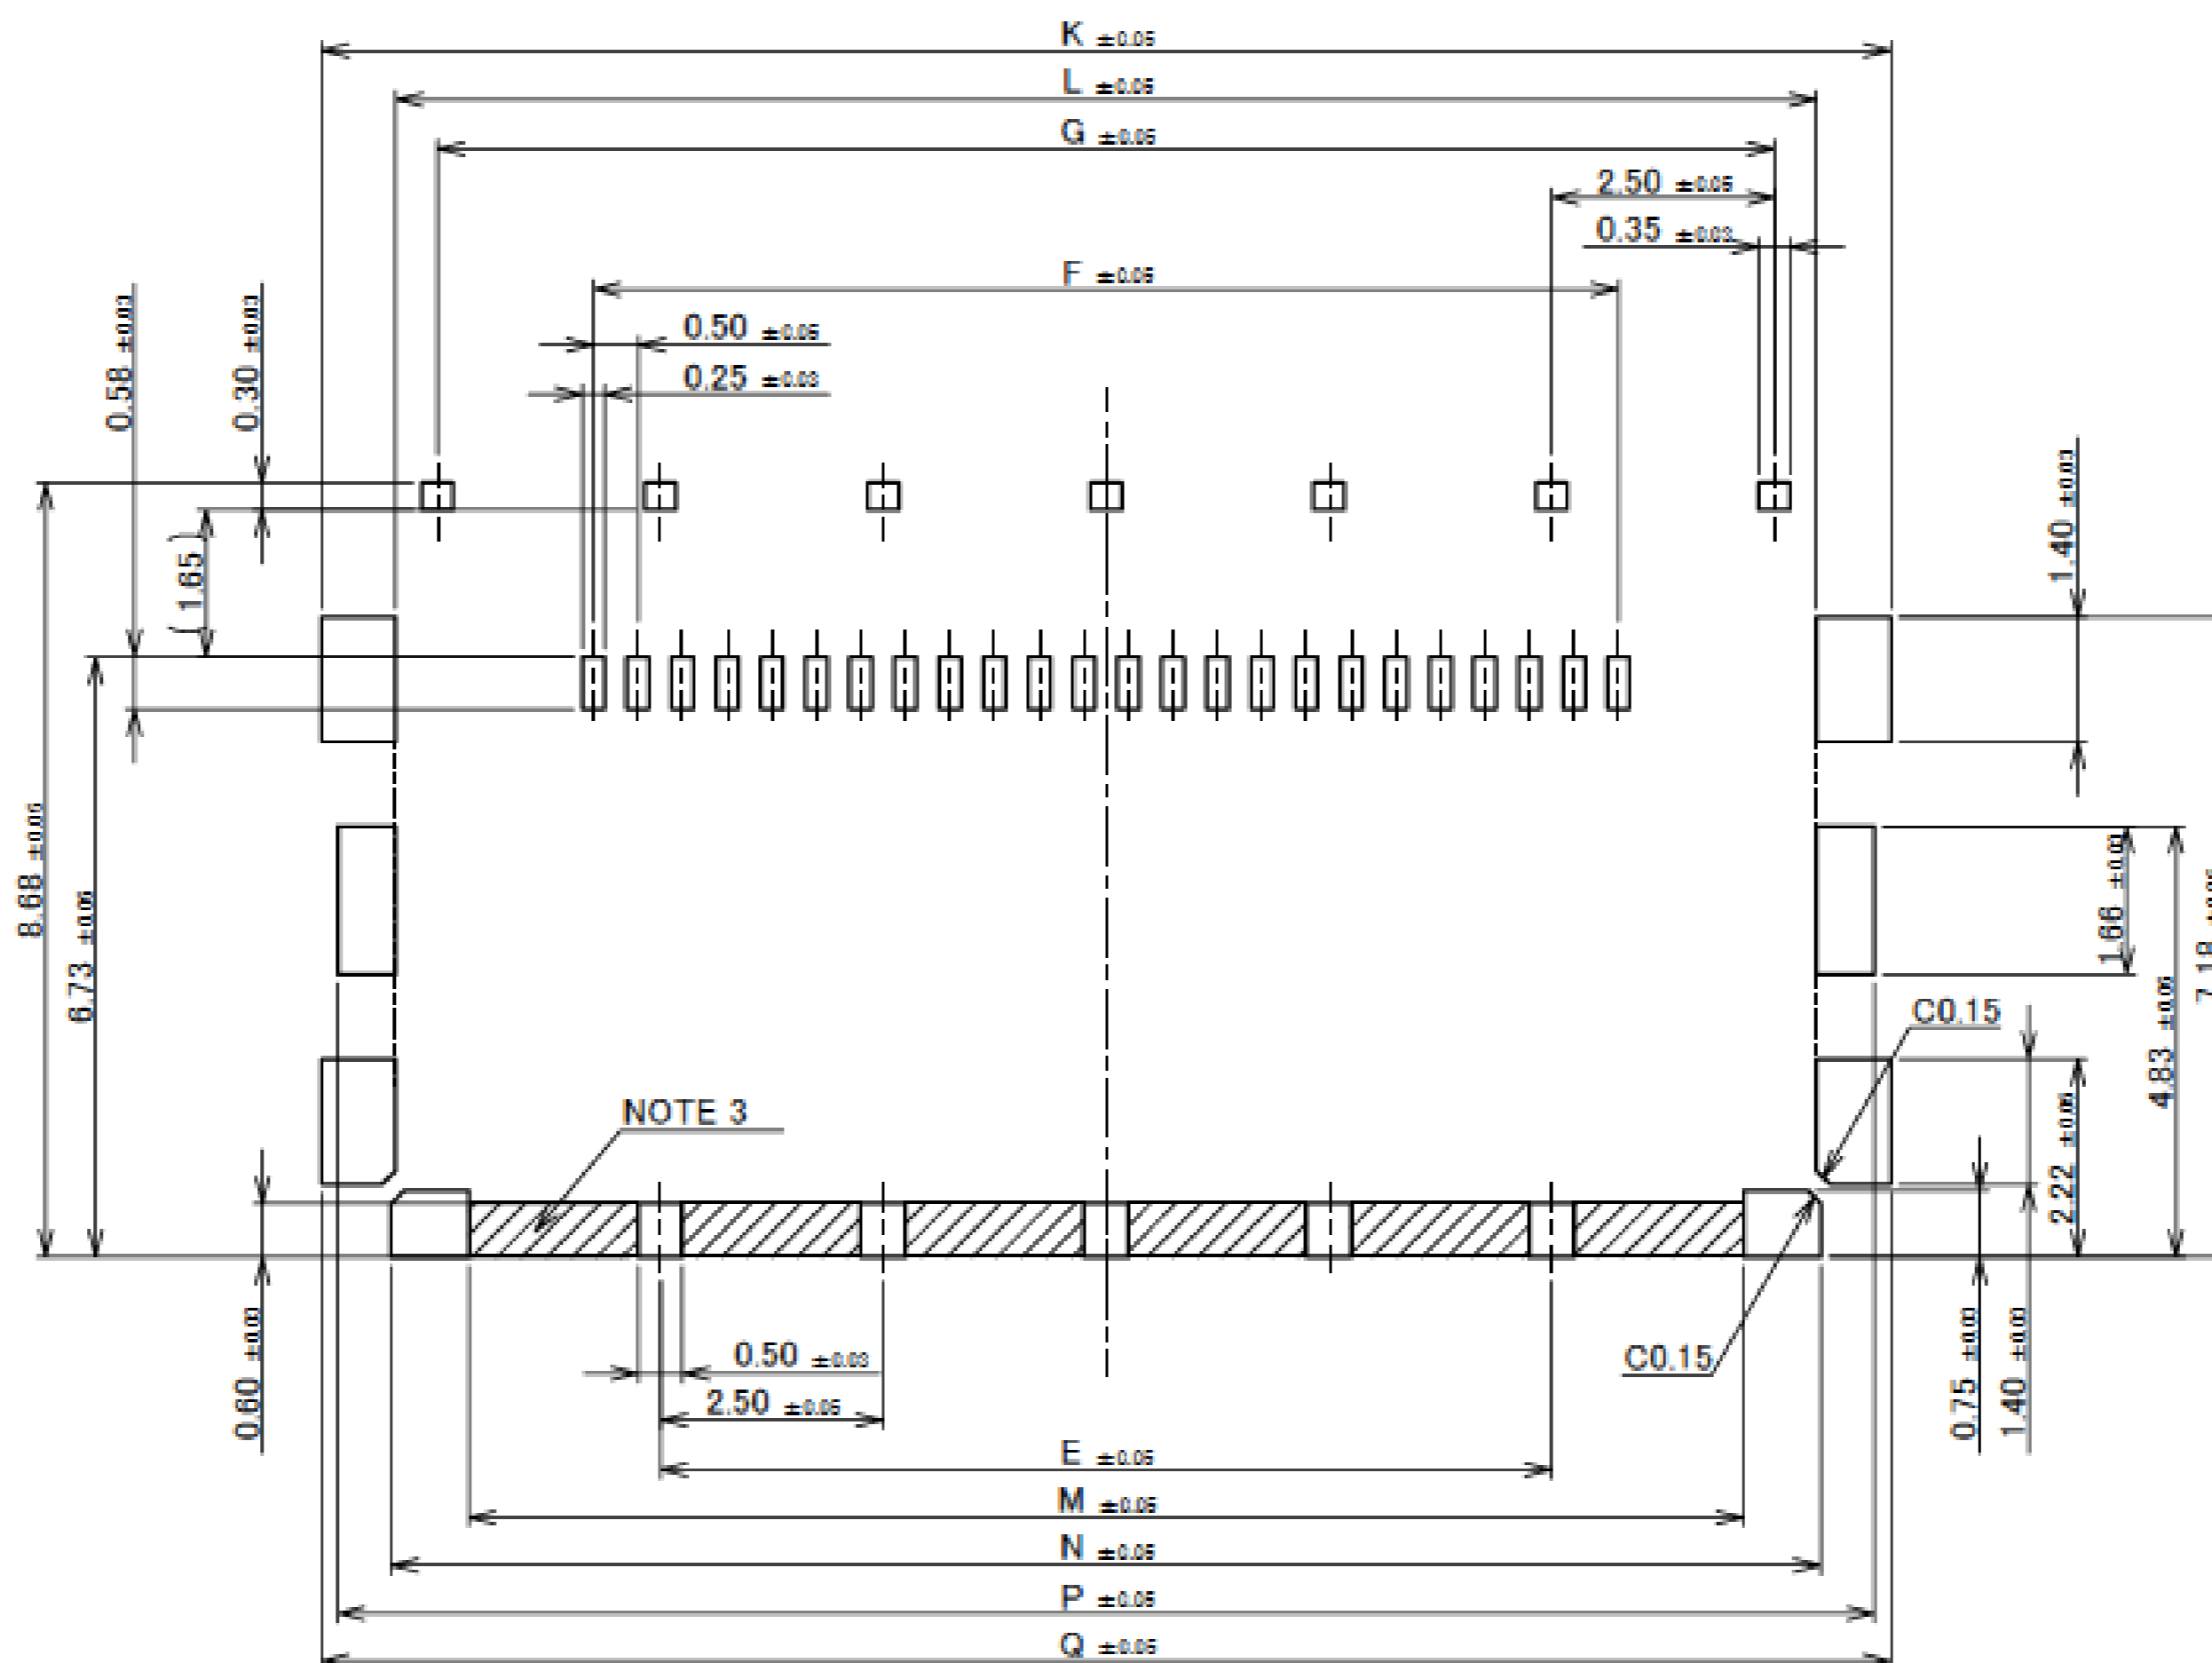


RECOMMENDED PCB & METALMASK LAYOUT
THICKNESS t=0.12

- NOTES.
3. SOLDER RESIST MUST BE APPLIED TO THIS AREA.

Rev.5

Connector Assembly

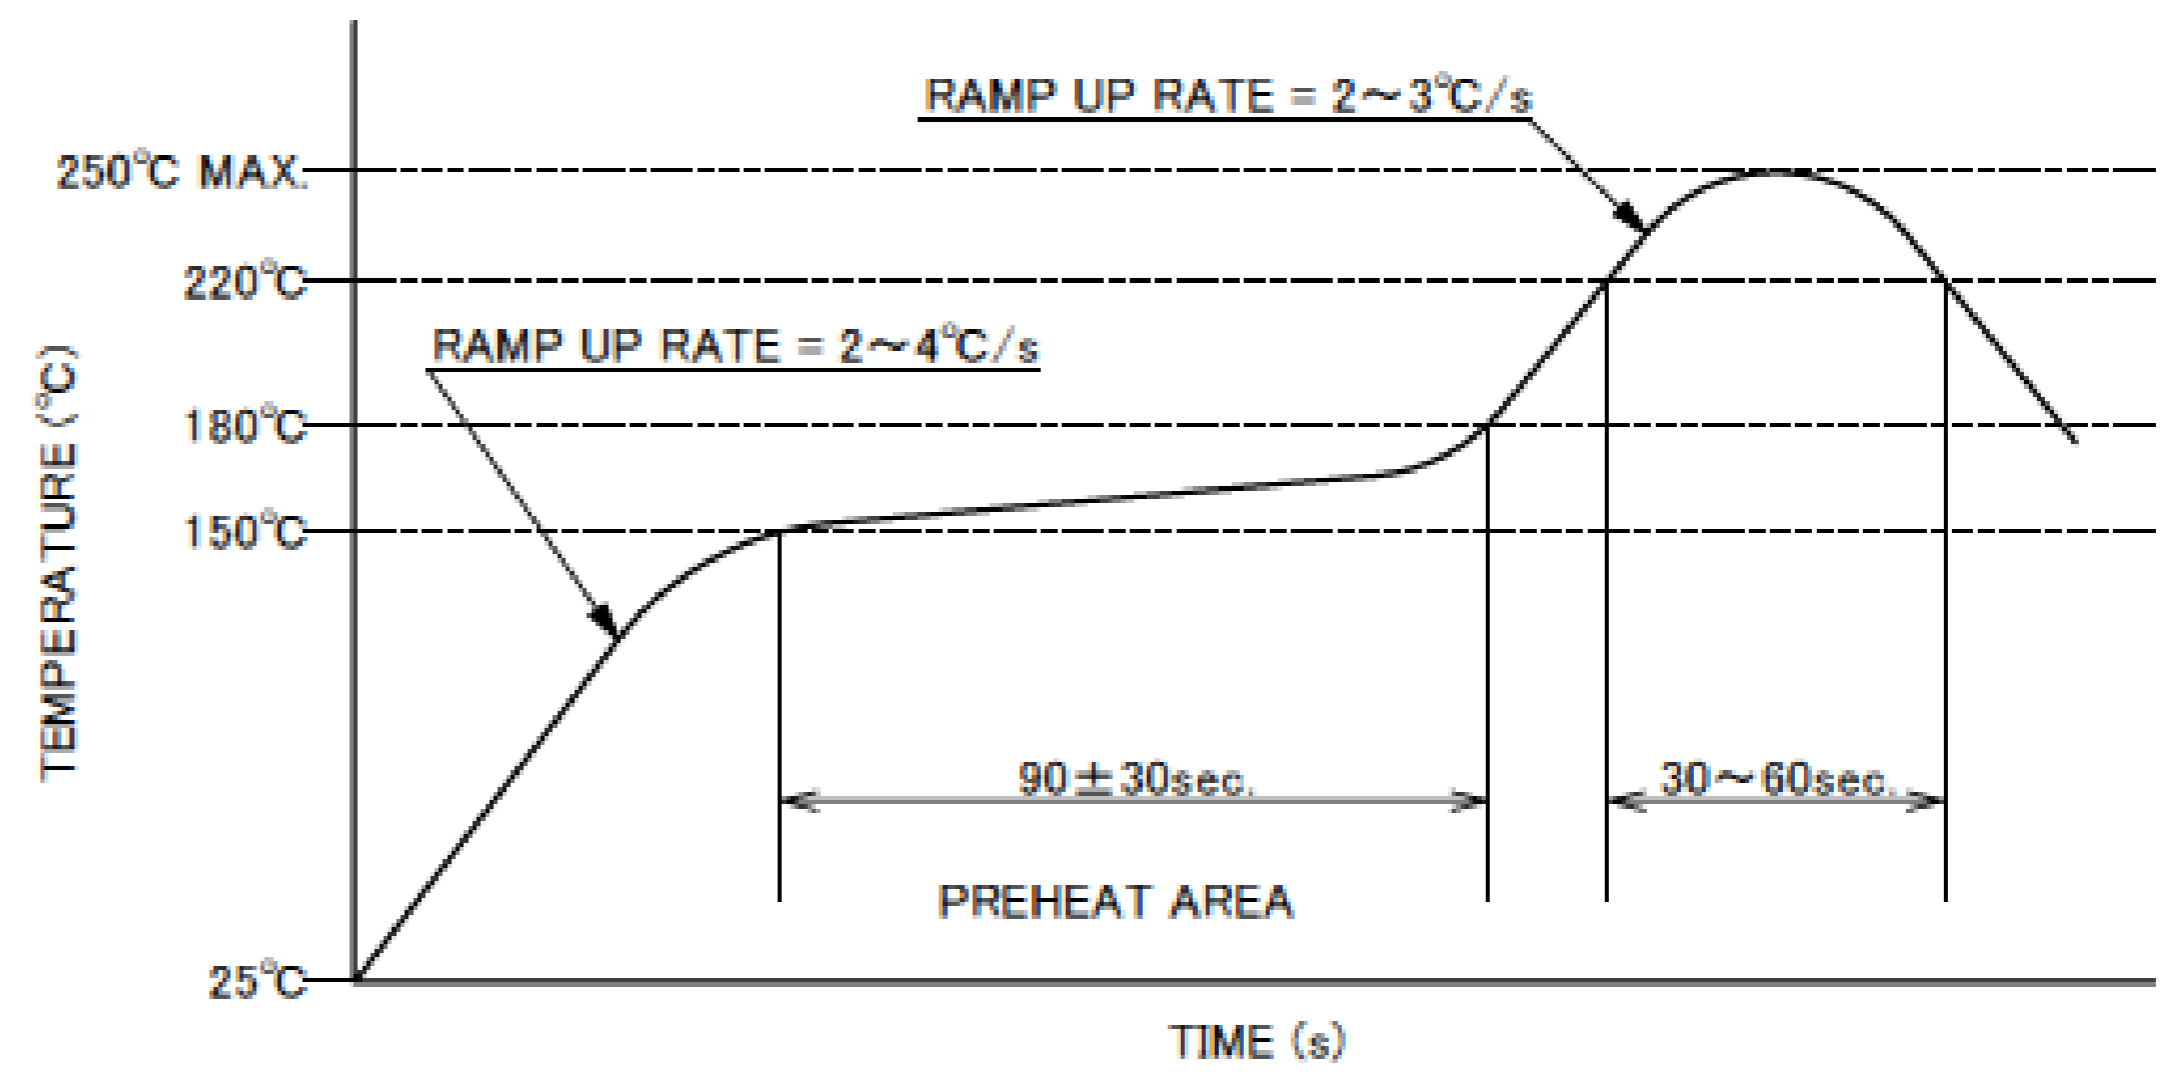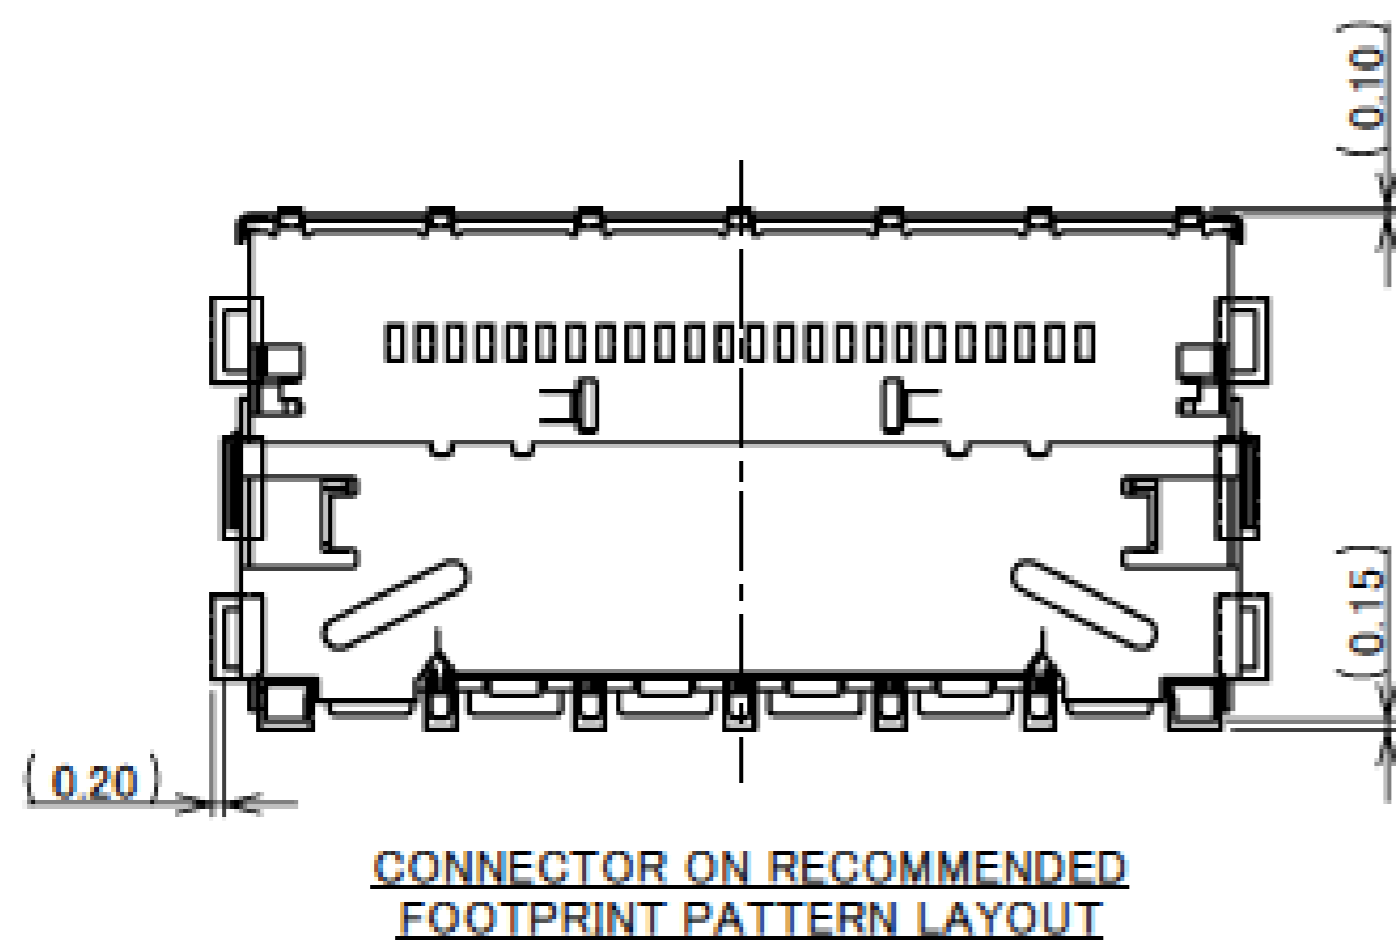

Rev.5

Plug Housing Assembly

ITEMS	SPECIFICATION
RATING VOLTAGE	50V AC/DC (PER CONTACT PIN)
RATING AMPERAGE (FOR SIGNAL CONTACT)	0.30A AC/DC (PER CONTACT PIN)
OPERATING TEMPERATURE	233~358K (-40°C~+85°C)
OPERATING HUMIDITY	85% RH. MAX. (NON-CONDENSING)
CONTACT RESISTANCE (FOR SIGNAL CONTACT)	INITIAL : 60mohm MAX. / AFTER TEST : $\angle 140\text{mohm}$ MAX.
INSULATION RESISTANCE	INITIAL : 500Mohm MIN. / AFTER TEST : 500Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC 250V 1min
DURABILITY	30 CYCLES
MATING FORCE (INITIAL / AFTER TEST)	24P : 22.00 N MAX.
UNMATING FORCE (INITIAL / AFTER TEST)	24P : 2.30 N MIN.
FFC/FPC RETENTION FORCE (INITIAL / AFTER TEST)	24P : 8.50 N MIN.
COPLANARITY	0.10 MAX.
PRODUCT SPECIFICATION	PRS-2645
TEST REPORT	TR-20006
PACKING STANDARD	PST-19012
INSTRUCTION MANUAL	HIM-19004
APPEARANCE CRITERIA No.	QLS-A***

Rev.5


Custom Connectors Available

 RF Connector

MHF® series



CABLINÉ® series
Micro-coaxial/Twinax/
Discrete Wire Connector

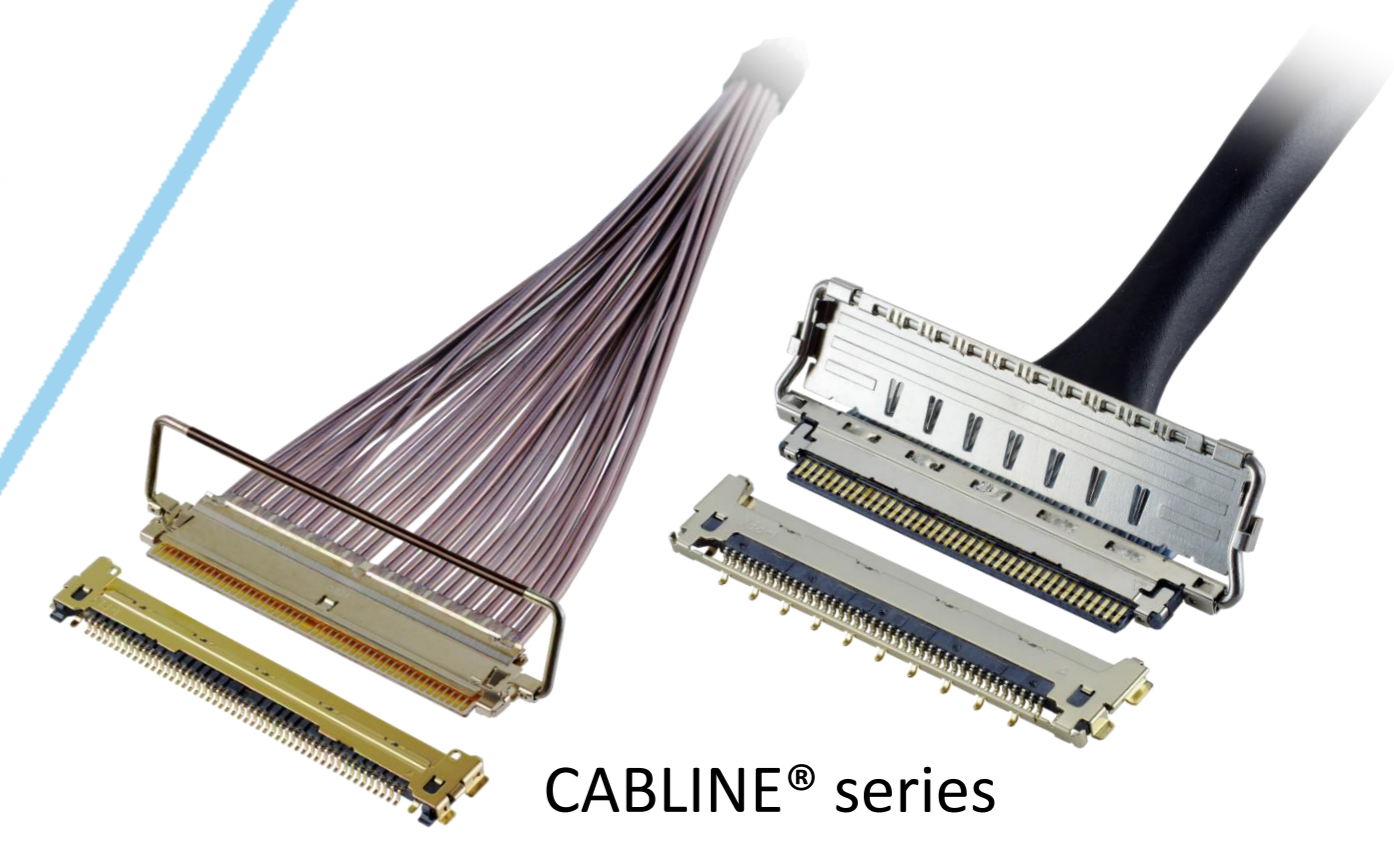

Optical Module


LIGHTPASS® series



NOVASTACK® series



Board-to-Board Connector

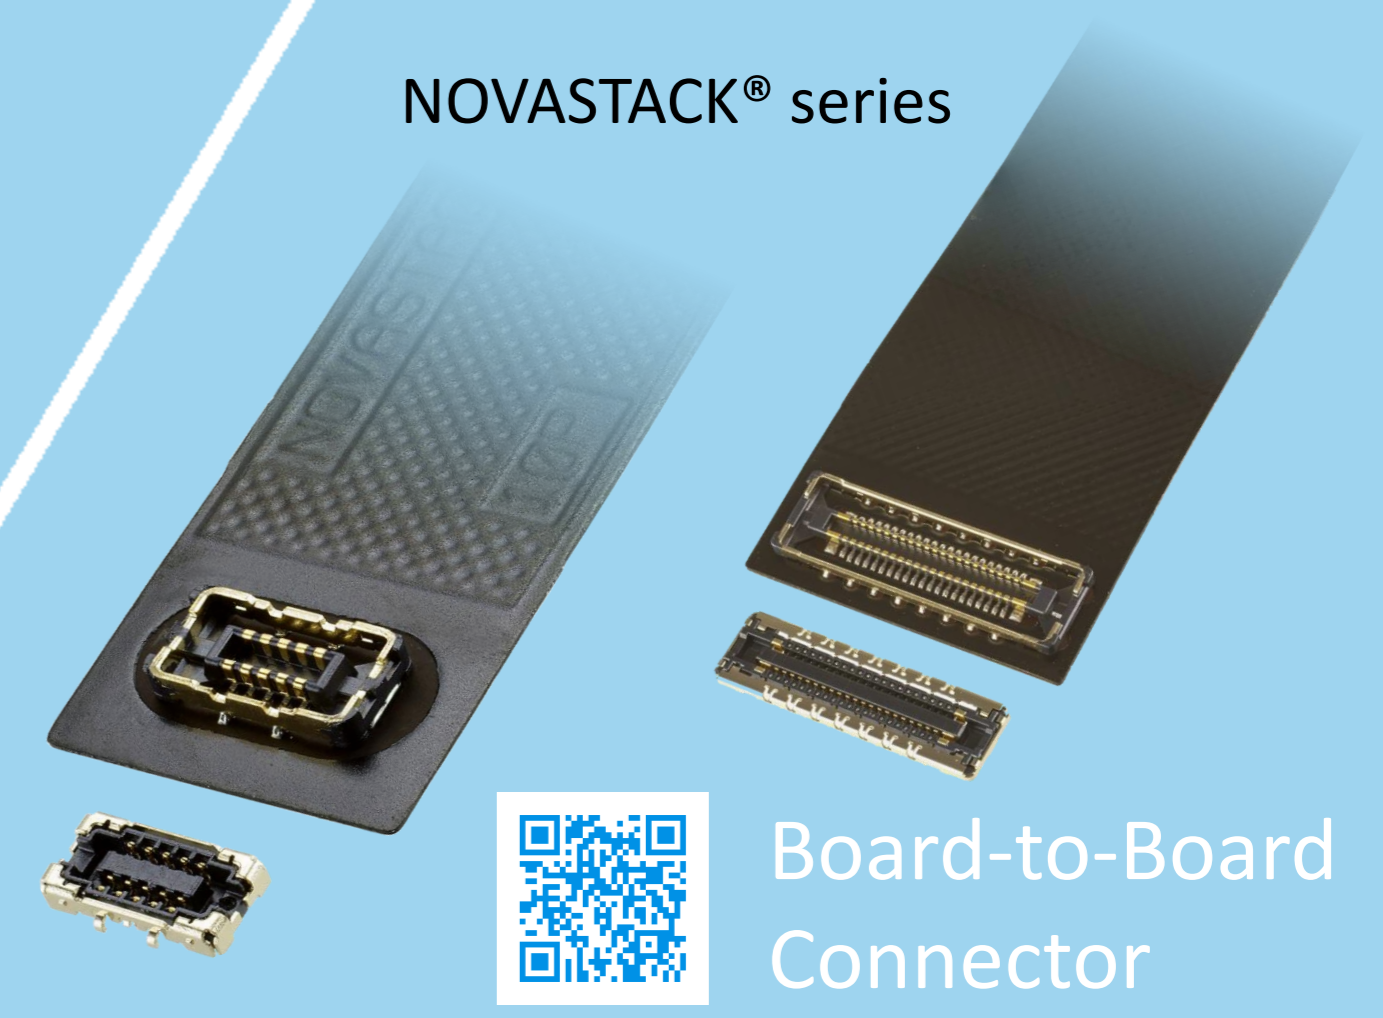

Power Connector/
Terminal

AP series

ISH® series



MINIFLEX® series

EVAFLEX® series



FPC FFC Connector




Inquiry



MINIDOCK® series



I/O Connector

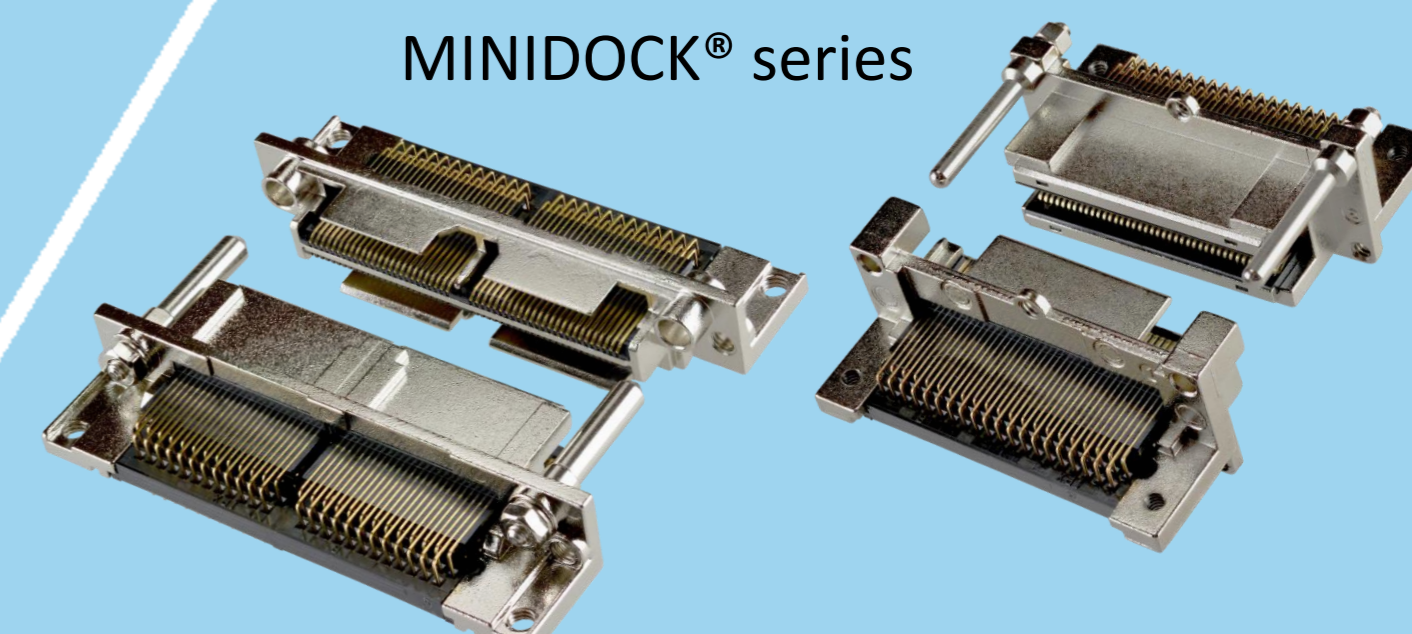

I-PEX, MHF, CABLINE, LIGHTPASS, NOVASTACK, ISH, IARPB, MINIFLEX, EVAFLEX, MINIDOCKS and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative or more detailed information.

www.i-pex.com



I-PEX

© I-PEX Inc. 2024
All rights reserved