

MHF® 4L LK

鎖扣設計，適用於所有 MHF 4/4L 類型的母座，組合高度 2.0 mm max.

Product Specifications:

Mated Height (mm max.)	2.0	
Rece. SMT Size (mm)	2.0 x 2.0	
Applicable Frequency	DC ~ 12 GHz	
Characteristic Impedance	50 ohm	
VSWR (L=100 mm)	DC~3 GHz	1.3 max.
	3~6 GHz	1.4 max.
	6~9 GHz	1.5 max.
	9~12 GHz	1.6 max.

Applicable Cable Size:


1.37 mm / AWG 30

Applicable Standards (Reference Only):


5G sub-6, Wi-Fi 6E, LTE/LTE-Advanced, LPWA, Bluetooth, GPS





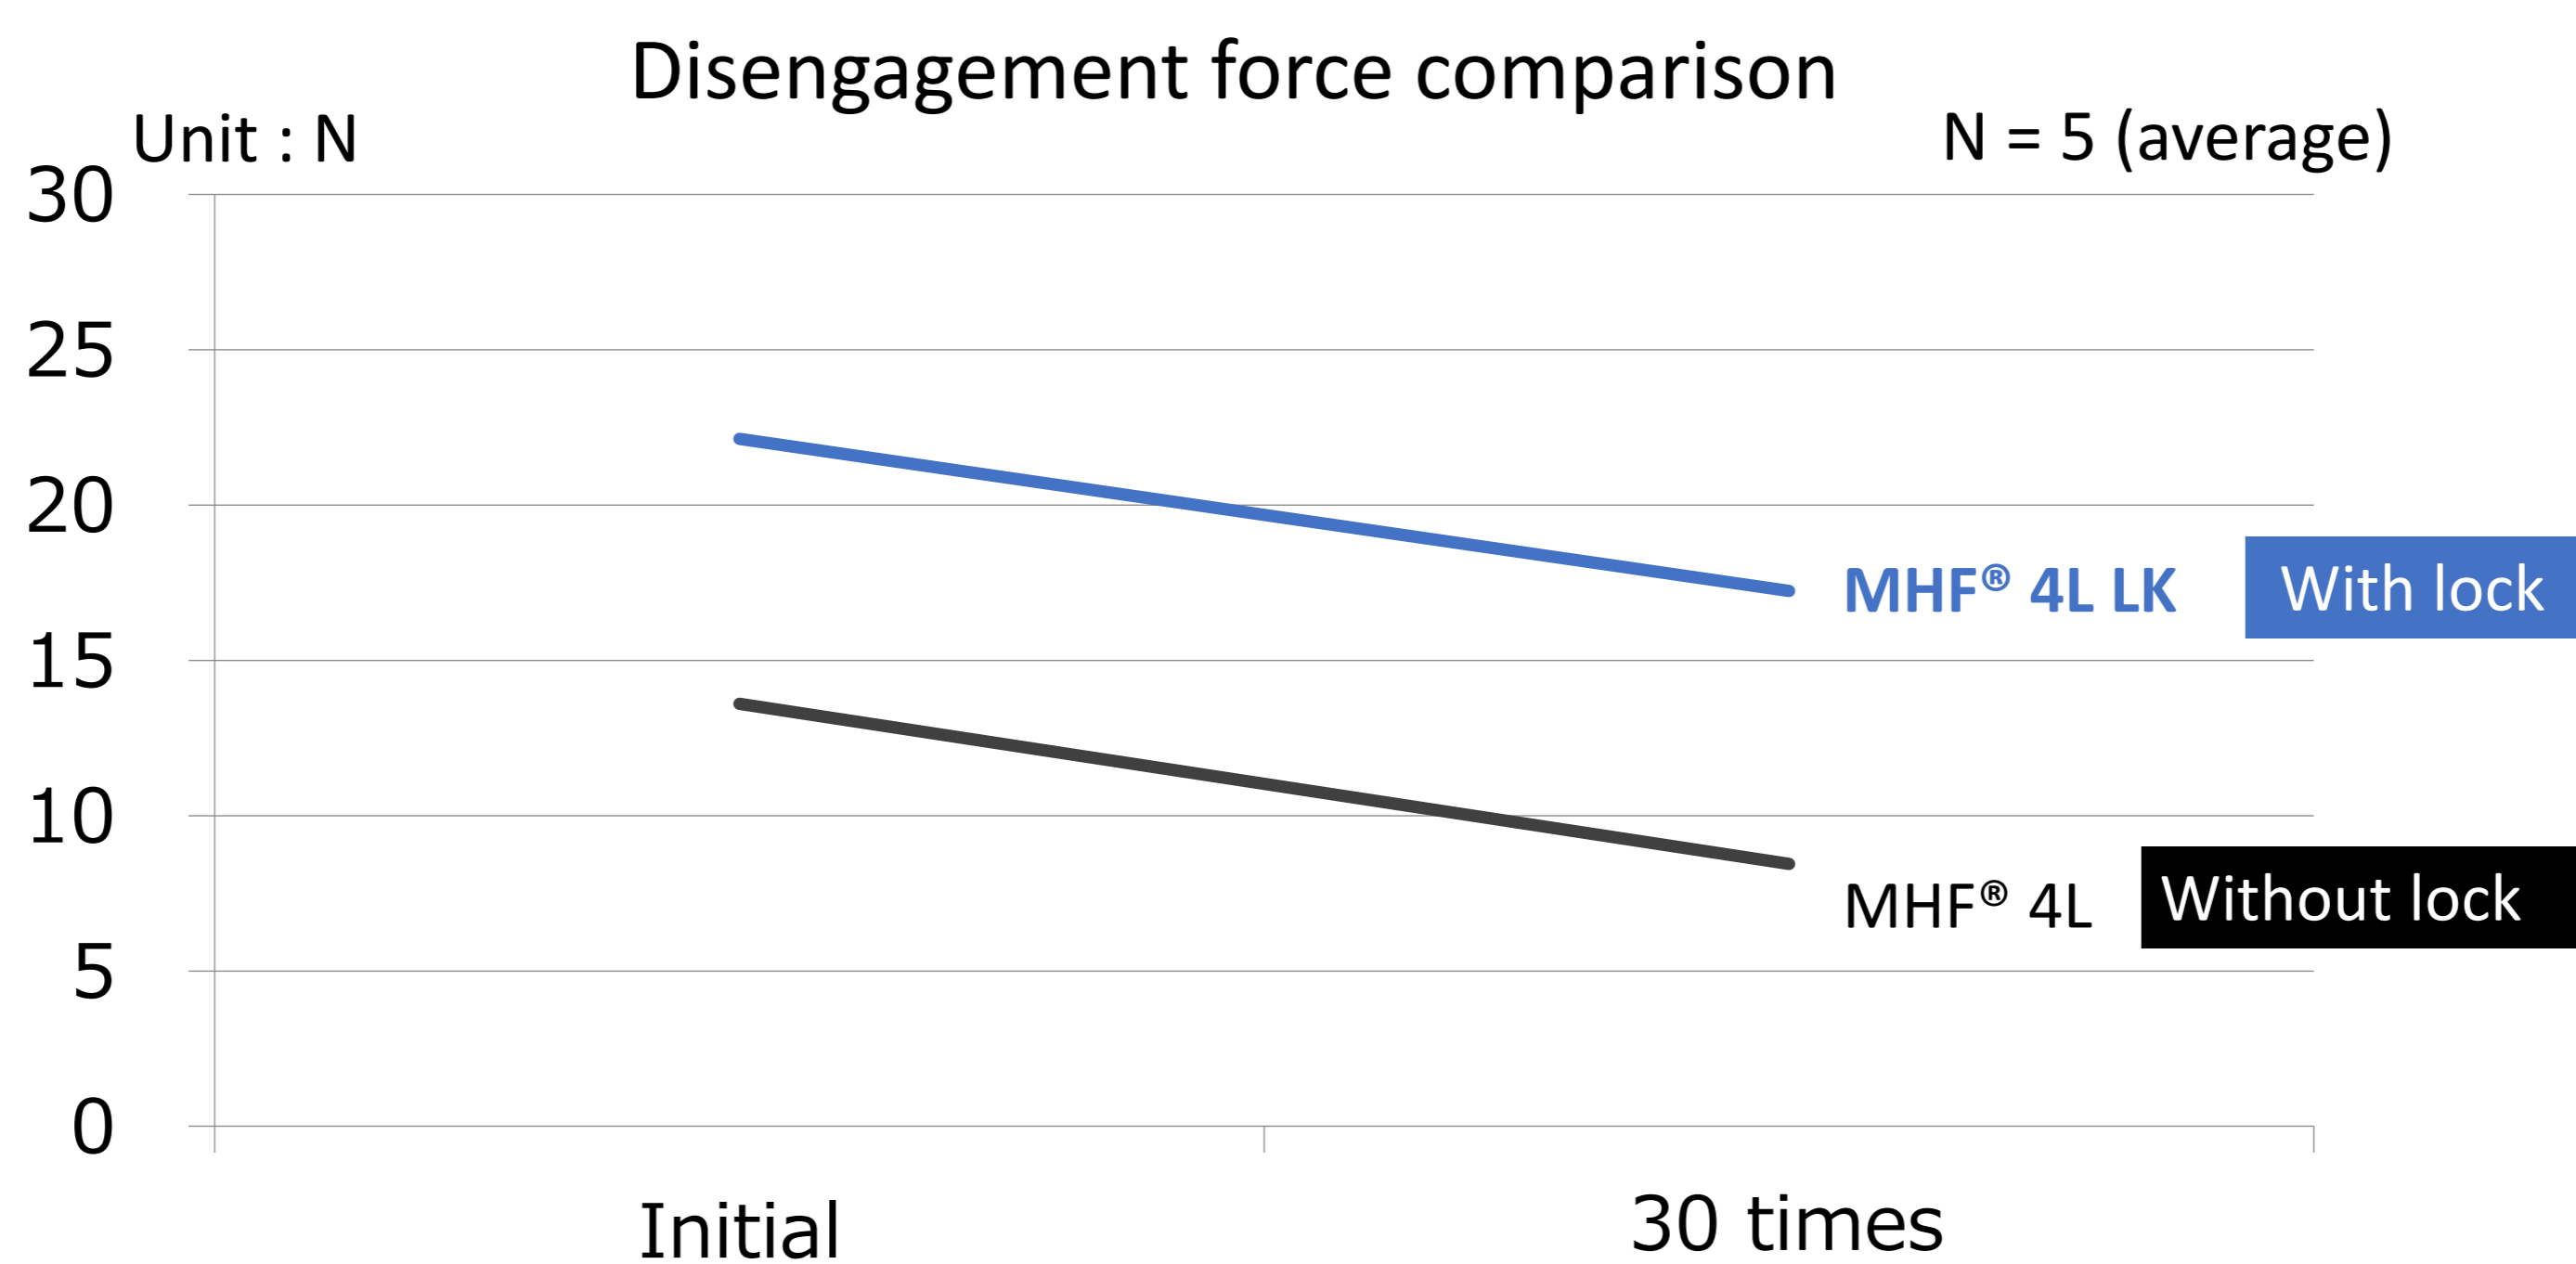

▶ 連續衝擊和震動的理想解決方案

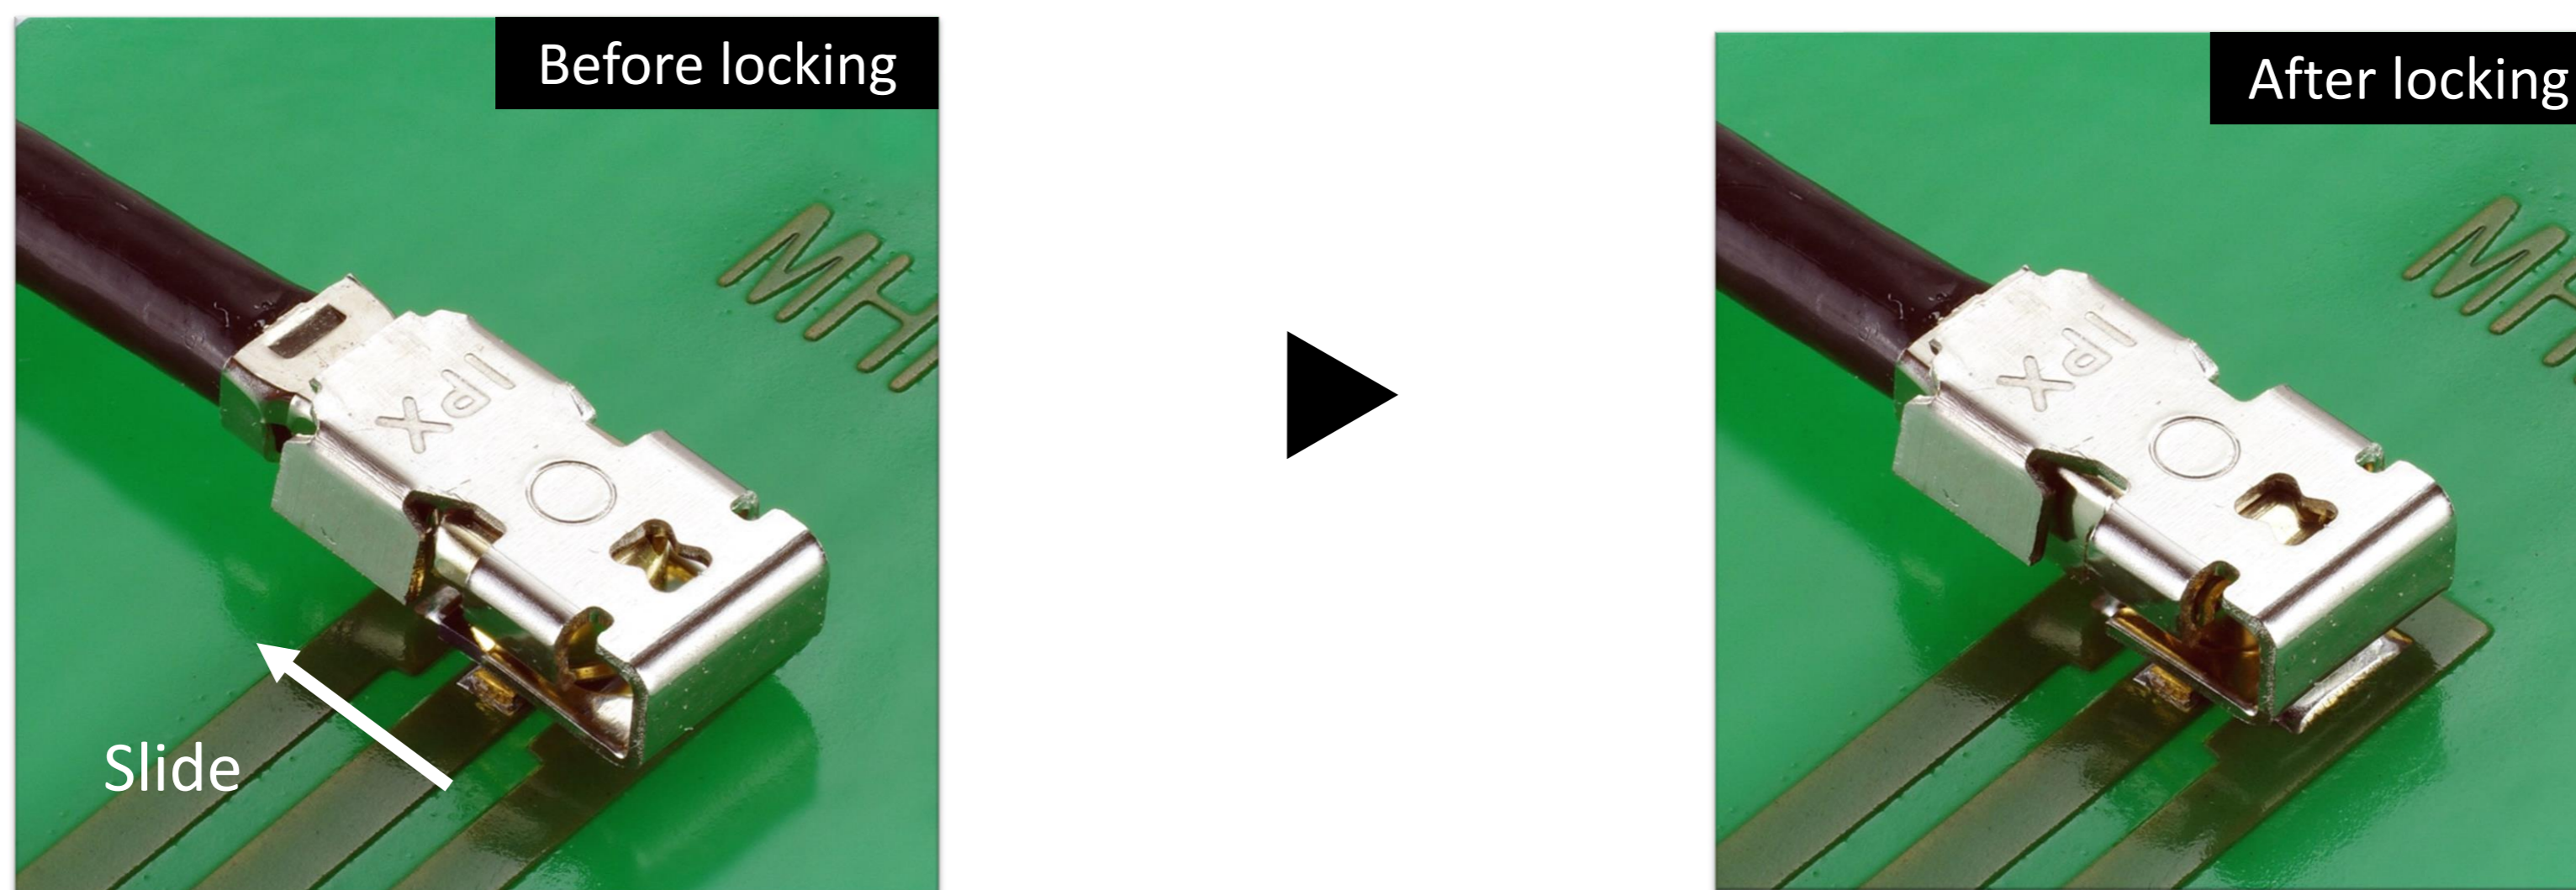

▶ MHF® 4L 公座自帶鎖扣結構




▶ 可匹配所有 MHF® 4 / 4L母座

					
Product name	MHF® 4L LK	MHF® 4L	MHF® 4L	MHF® 4L	
Lock	With Lock	Without Lock	Without Lock	Without Lock	
Mating Height	2.0 mm max.	1.7 mm max.	1.4 mm max.	1.2 mm max.	
Coax O.D. (Center Conductor AWG)	1.37 mm (AWG#30)	●			
	1.13 mm (AWG#32)		●		
	0.95 mm (AWG#33)			●	
	0.81 mm (AWG#36)				●
	0.64 mm (AWG#36)				●
Receptacle	MHF 4 receptacle (20449-001E-**) , MHF 4L receptacle (20579-001E)				




Component Parts Details

MHF[®] 4L LK

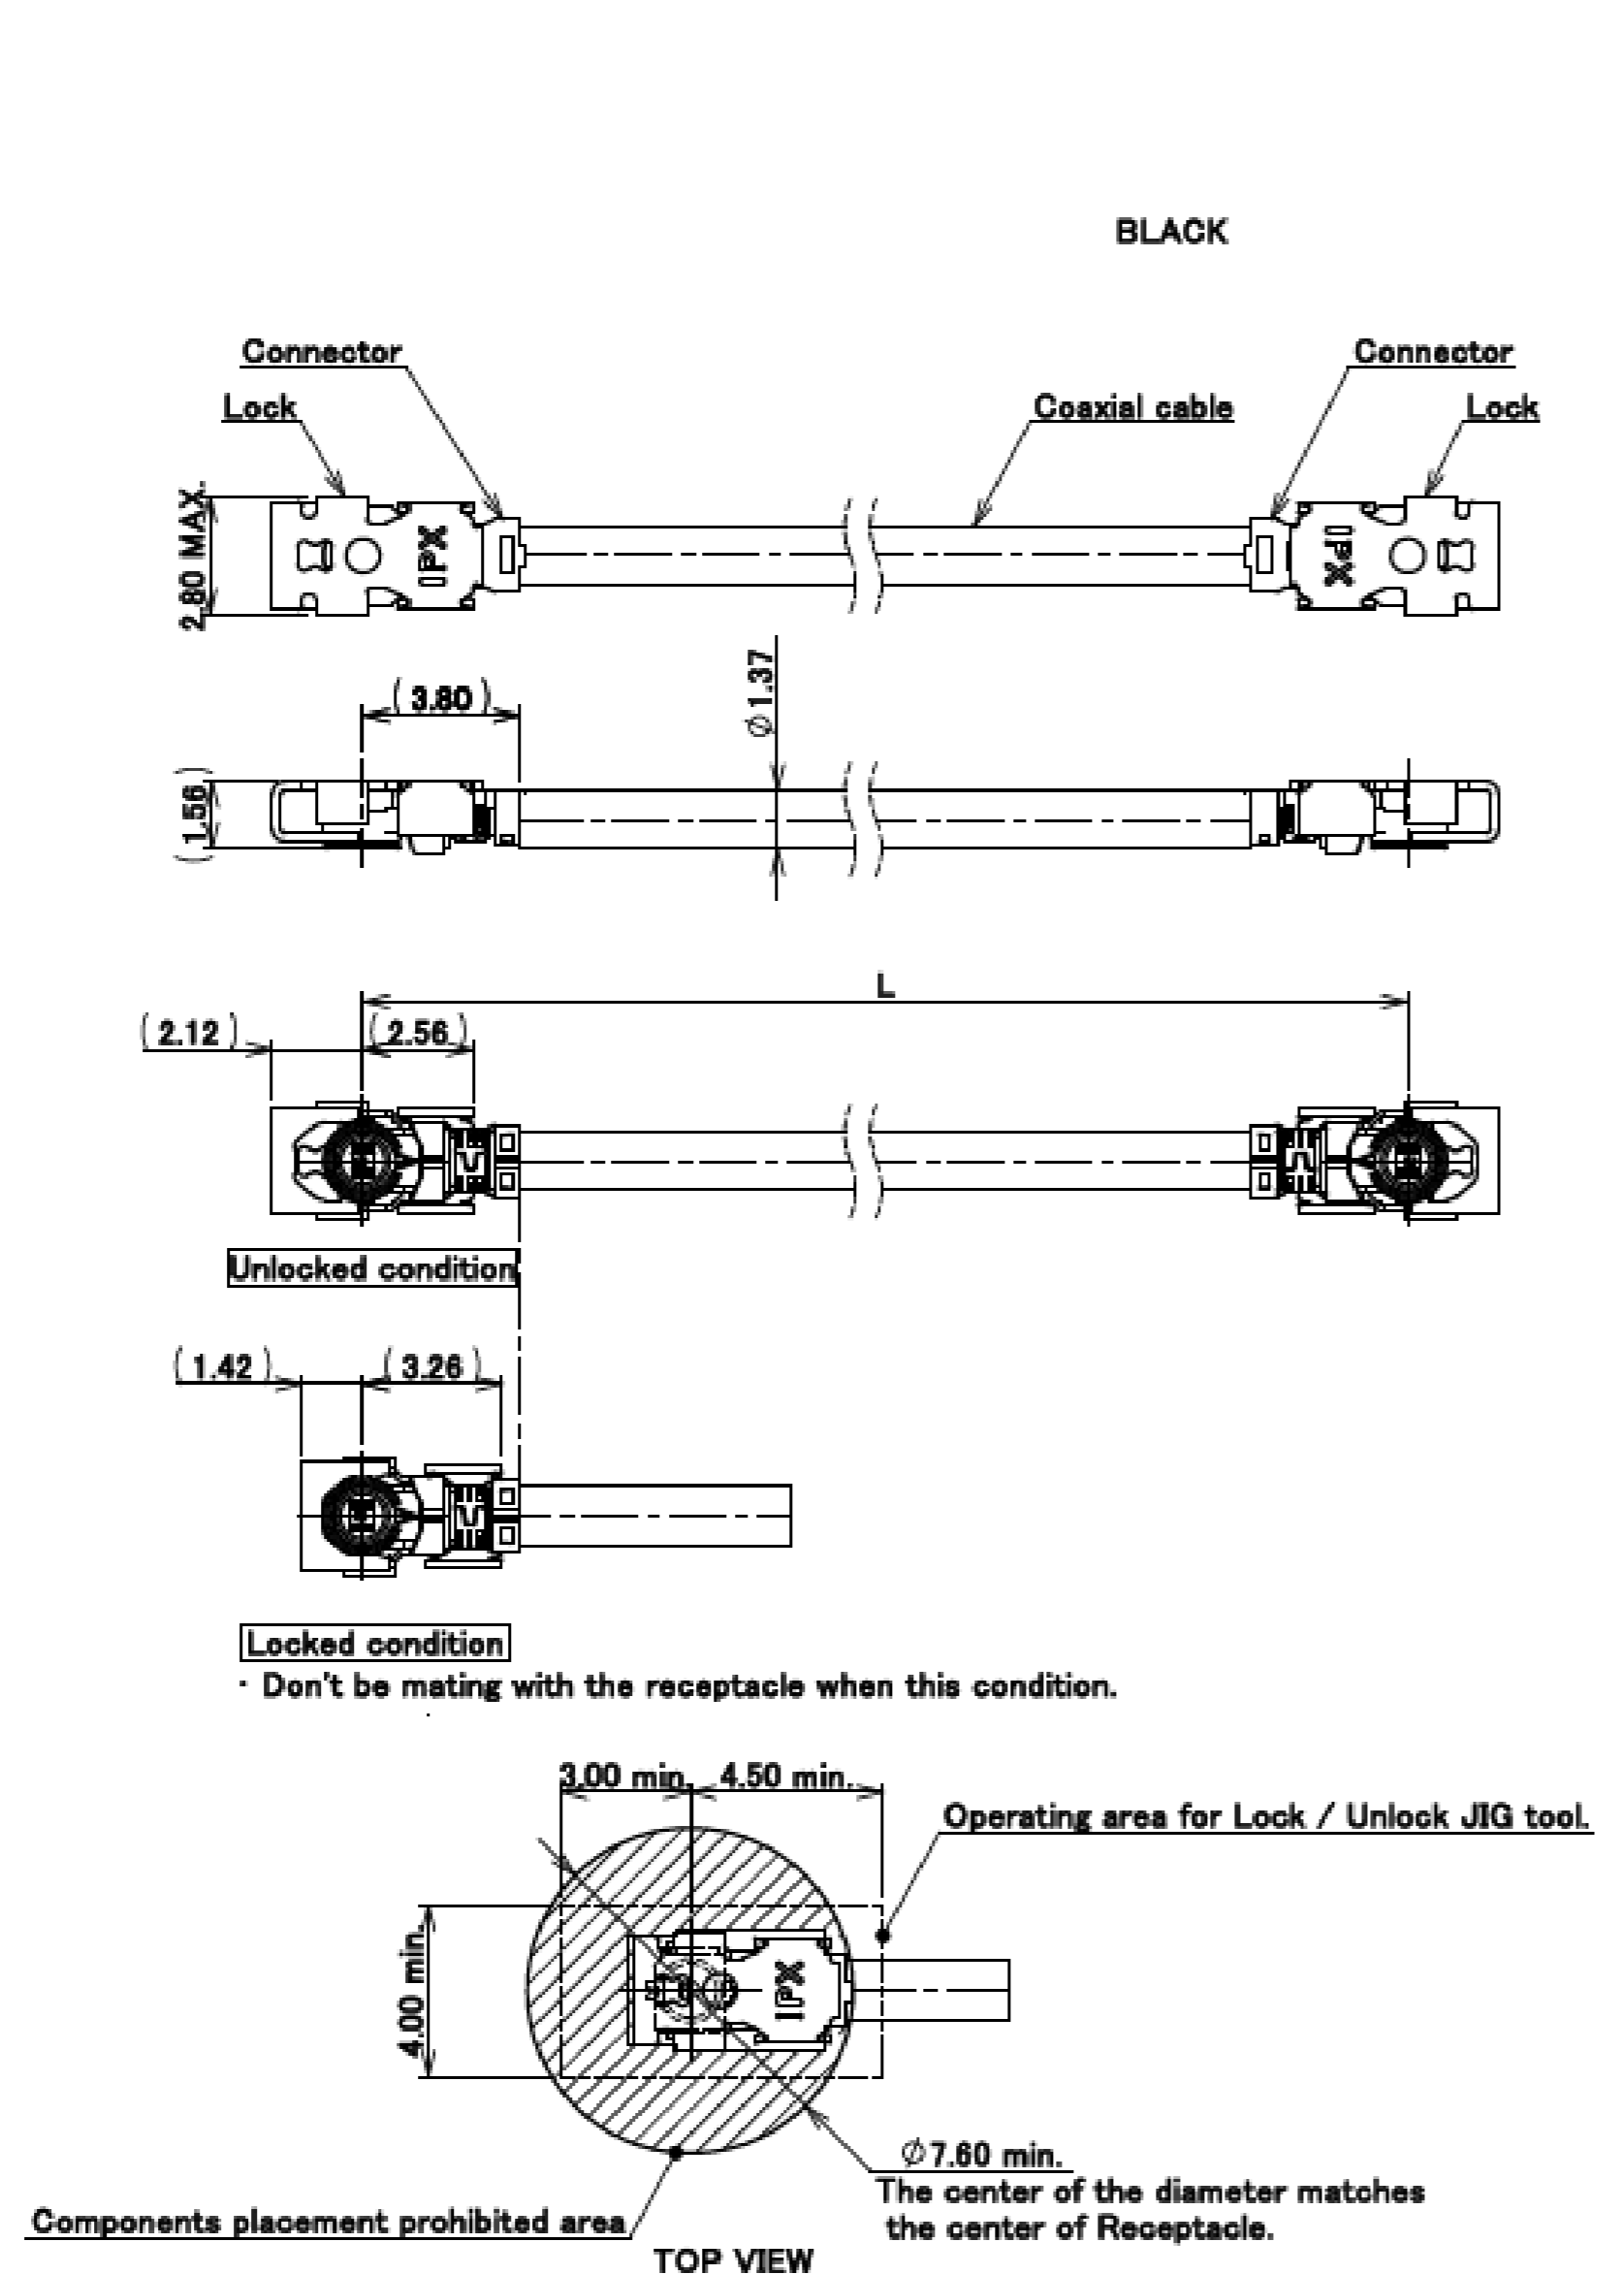


NOTES


1. Constructions
 (1) Connector : MHF4L Plug
 (2) Coaxial cable : AWG#30 Φ 1.37
2. Orientation of connector : $0^\circ \pm 45^\circ$
3. Packing : Bag
4. This product is RoHS compliant.
5. Cable crimp strength : 15N MIN.
6. Permissible load of cable at mating.

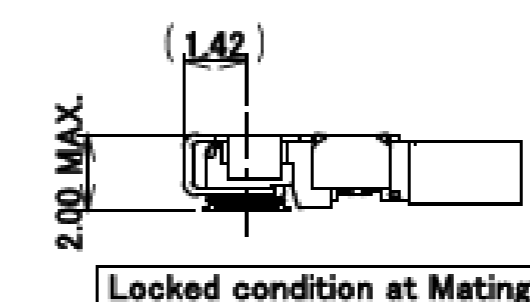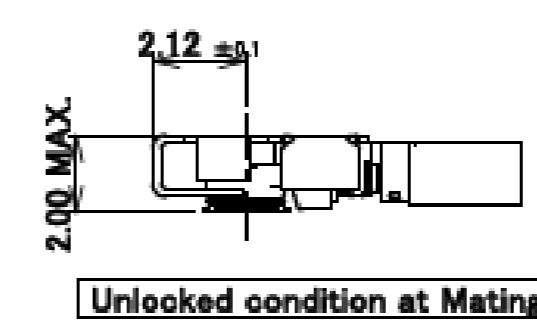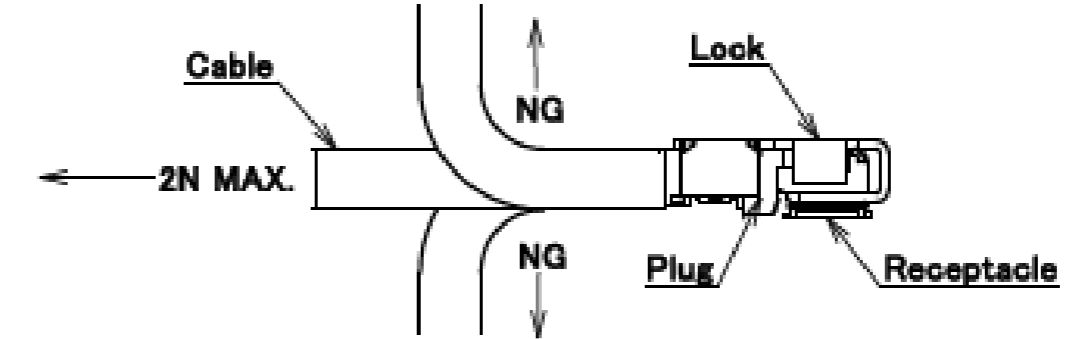

MHF[®] 4L LK



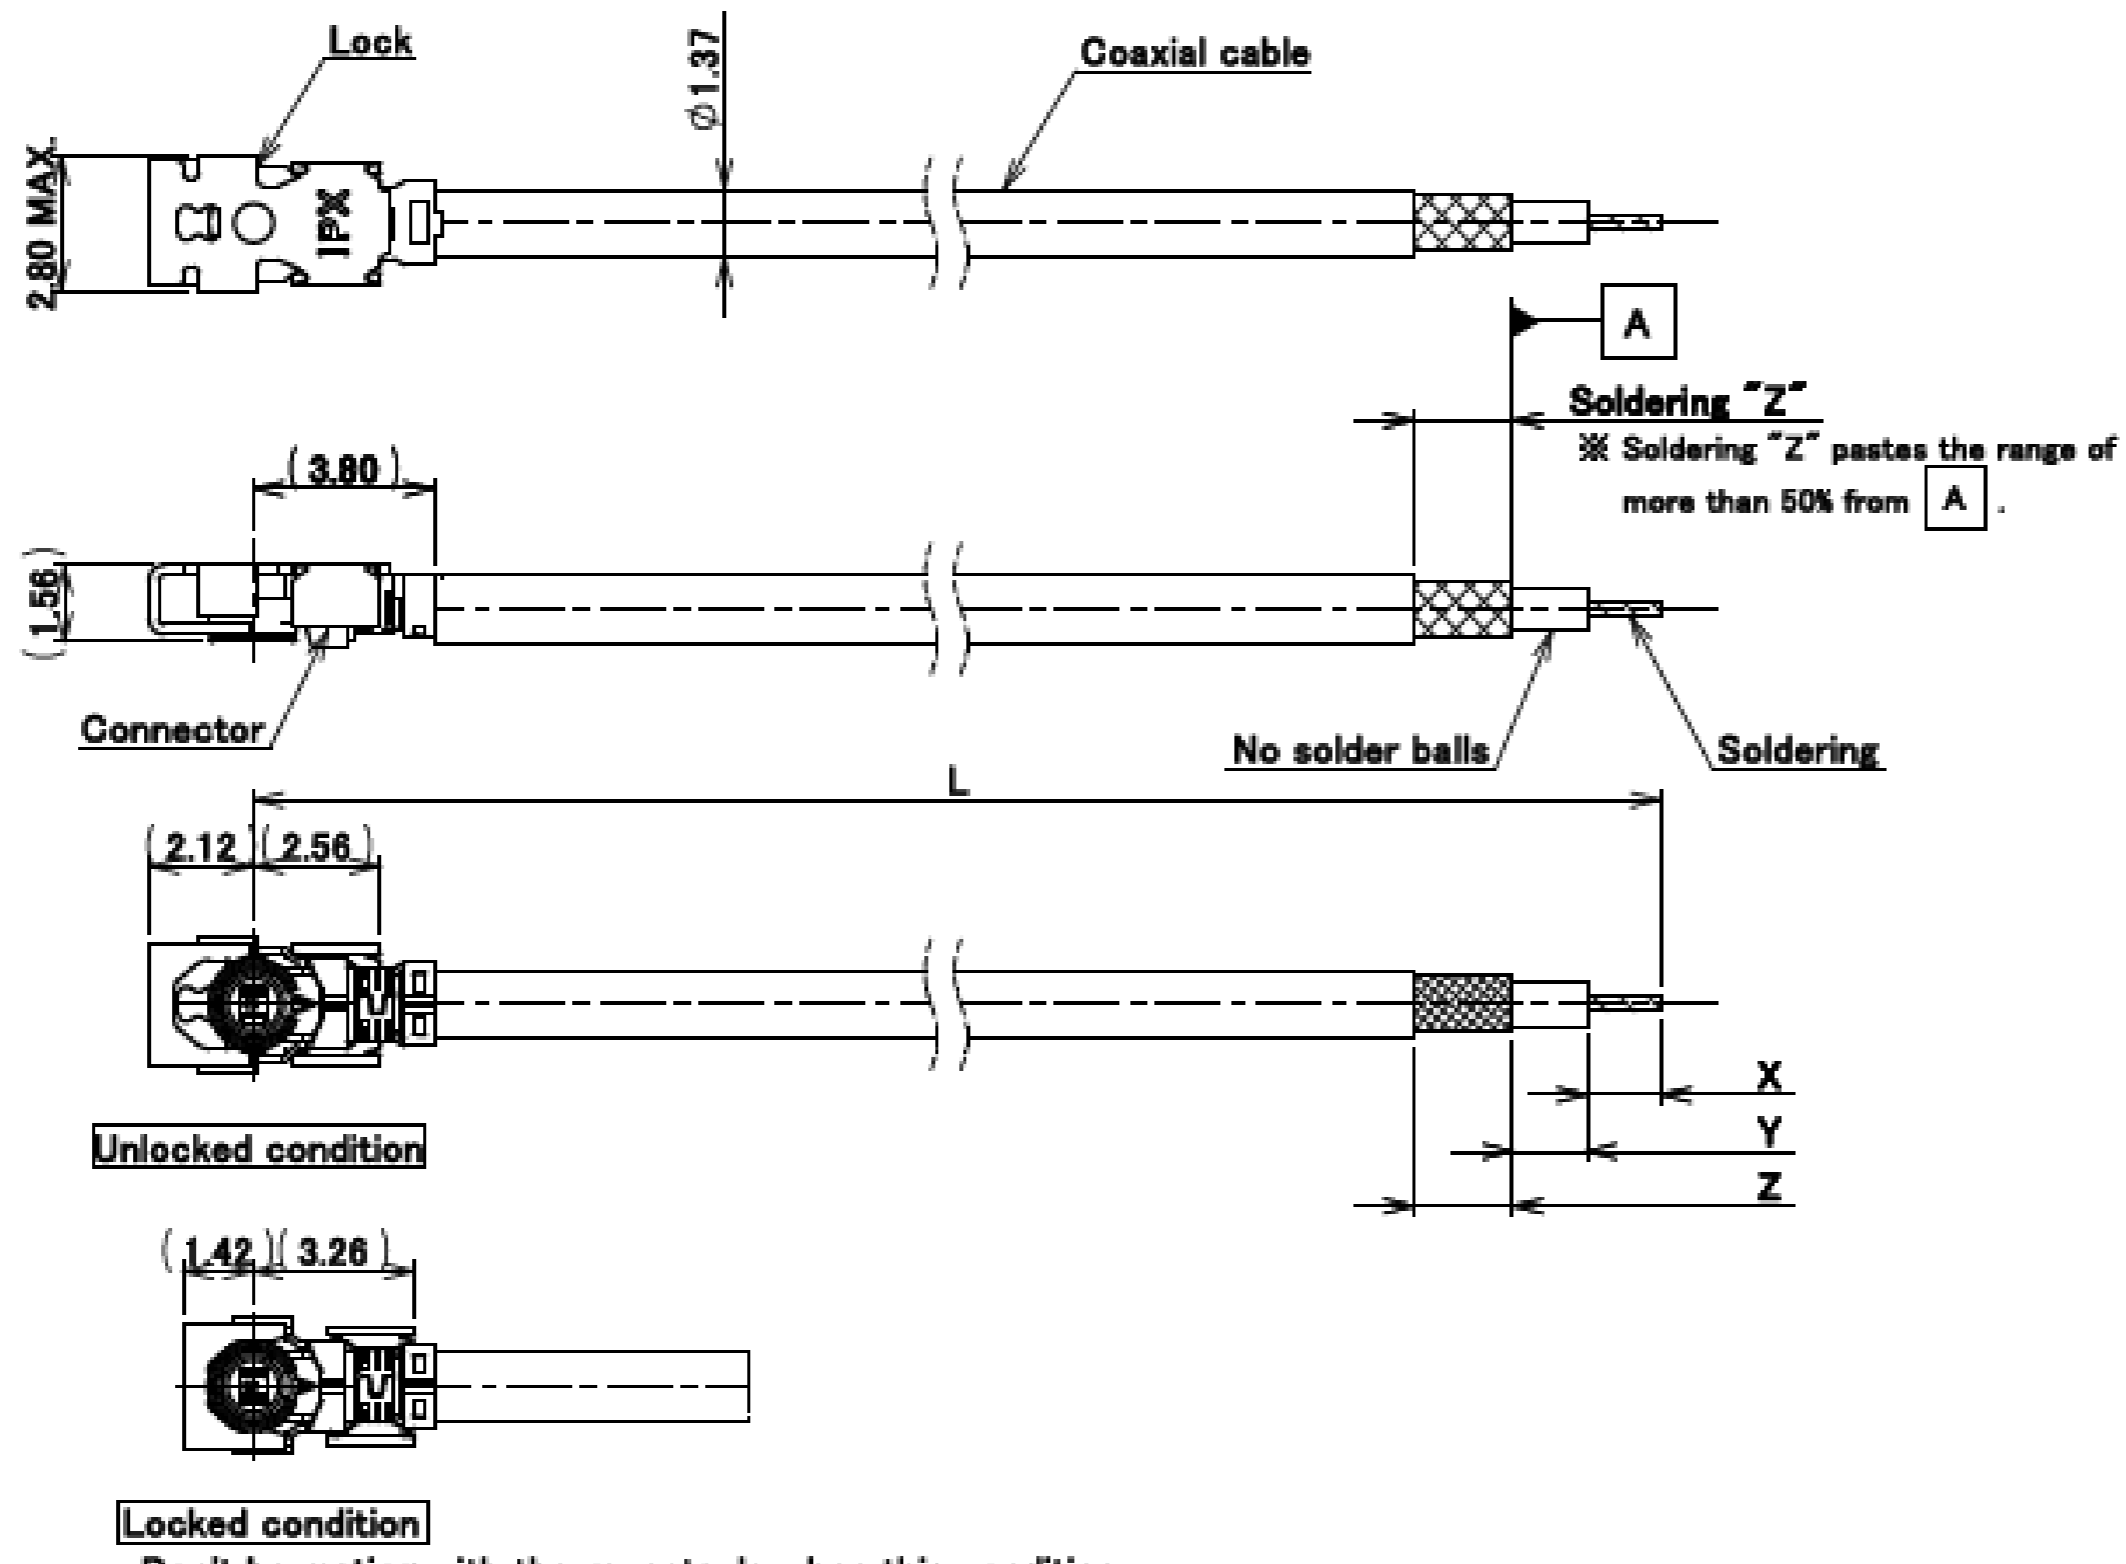


Locked condition
 · Don't be mating with the receptacle when this condition.

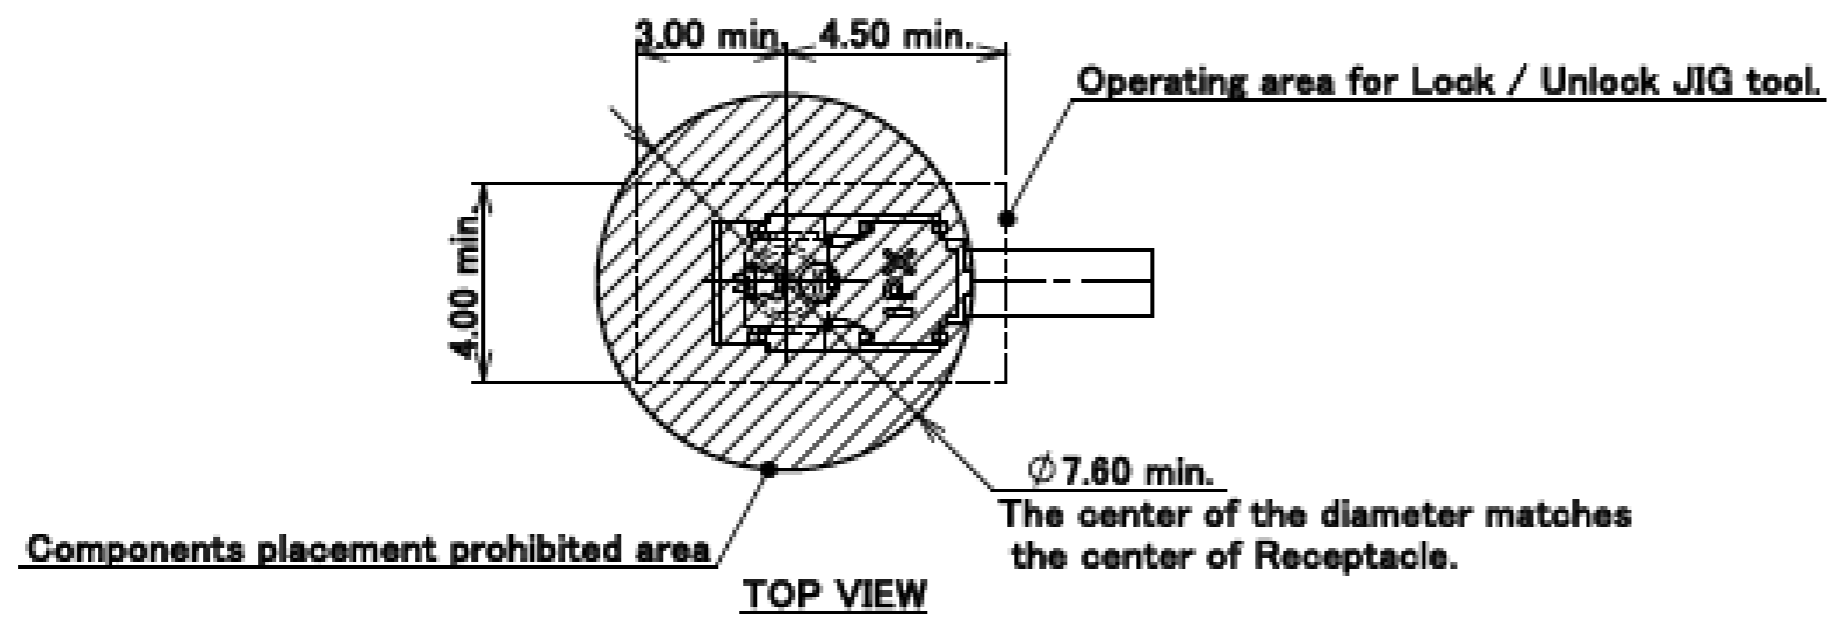

NOTES

1. Constructions
 - (1) Connector : MHF4L Plug
 - (2) Coaxial cable : AWG#30 ϕ 1.37
2. Packing : Bag
3. This product is RoHS compliant.
4. Cable crimp strength : 15N MIN.
5. Permissible load of cable at mating.

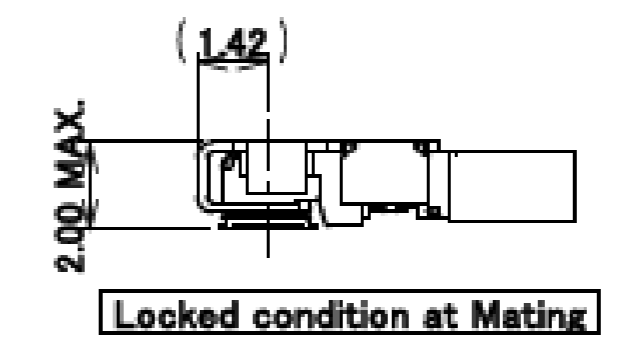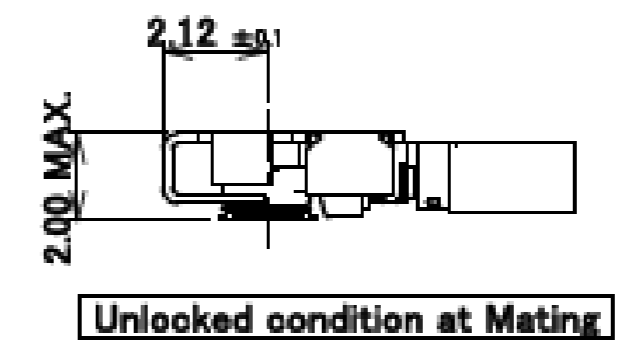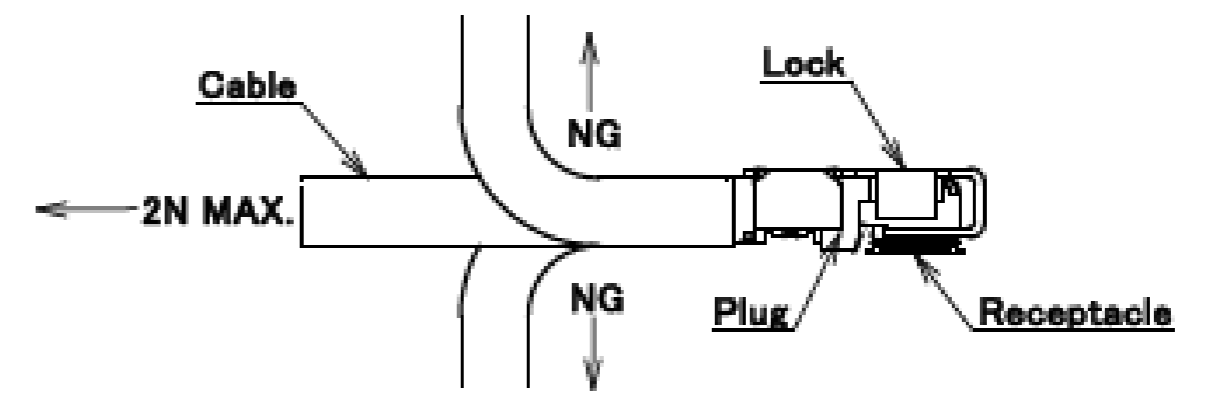


Custom Products Available

RF Connector

MHF® series



Micro-coaxial/Twinax/ Discrete Wire Connector

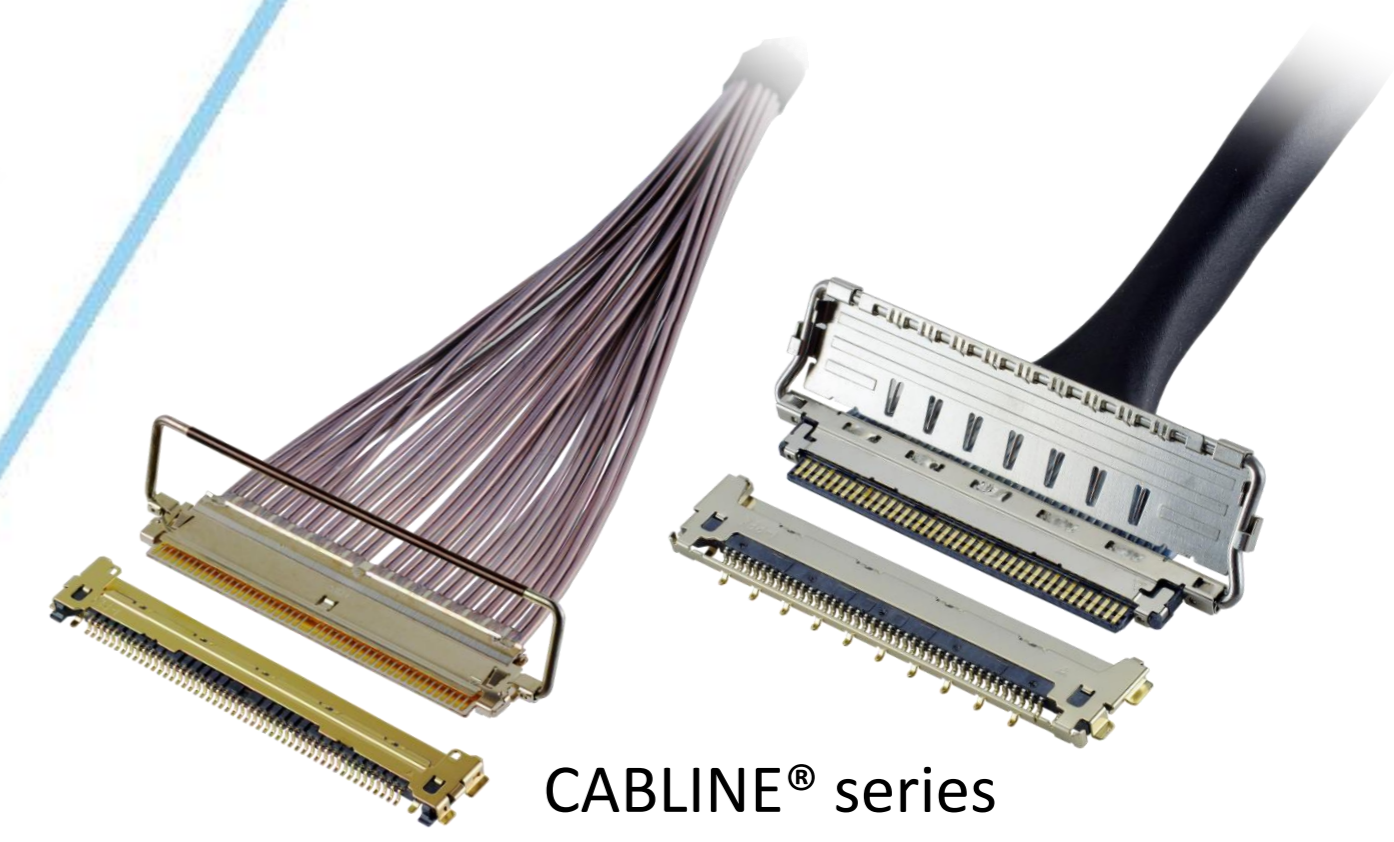

CABLINE® series




Optical Module

LIGHTPASS® series



NOVASTACK® series

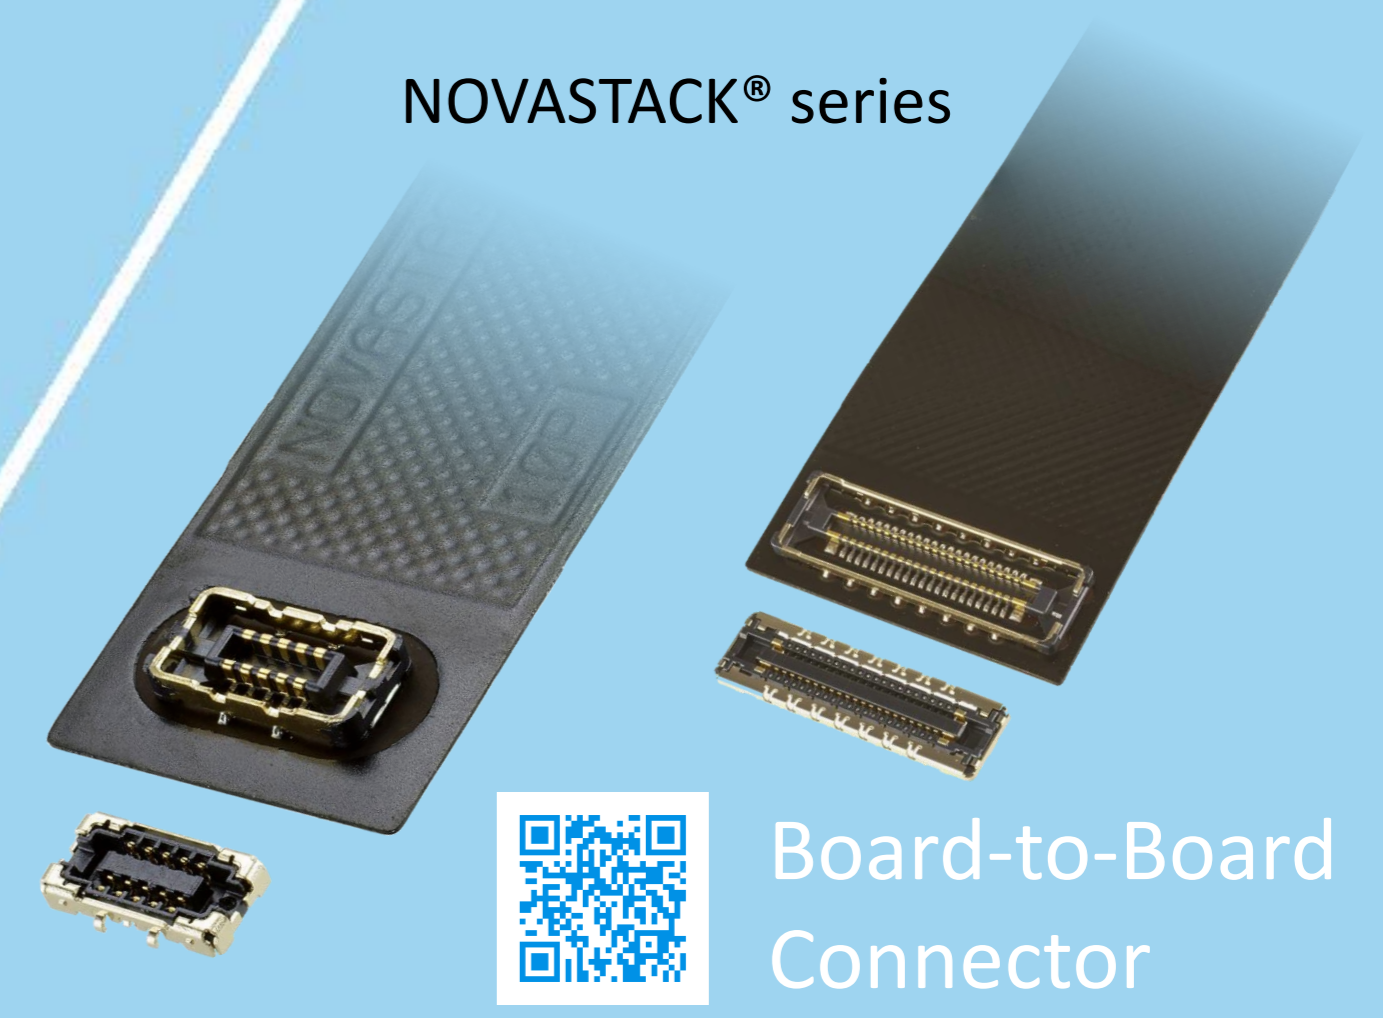

Board-to-Board Connector



Power Connector/ Terminal

AP series

ISH® series



MINIFLEX® series

EVAFLEX® series




FPC FFC Connector



Inquiry



MINIDOCK® series

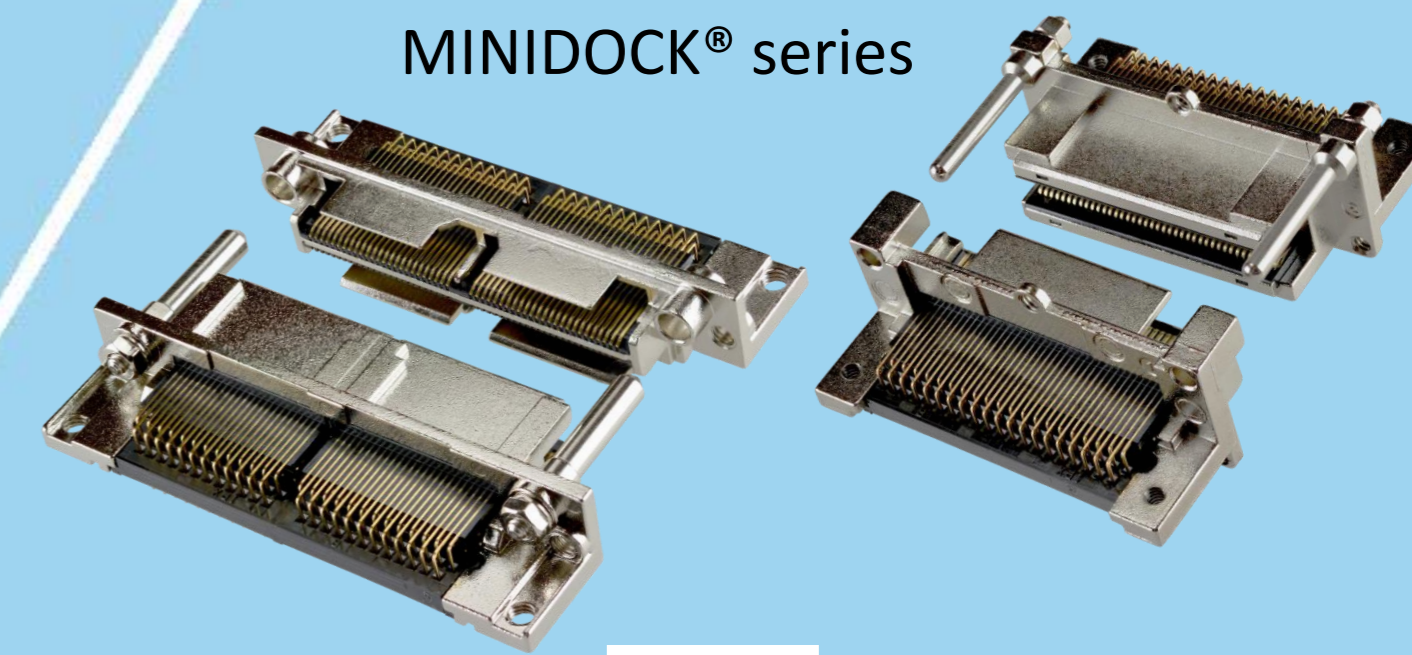

I/O Connector

I-PEX, MHF, CABLINE, LIGHTPASS, NOVASTACK, ISH, IARPB, MINIFLEX, EVAFLEX, MINIDOCKS and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative or more detailed information.

www.i-pex.com



I-PEX

© I-PEX Inc. 2024
All rights reserved