
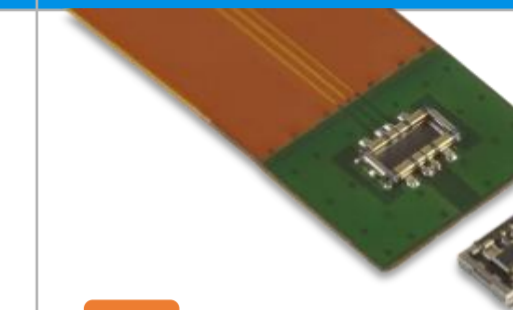


Board-to-Board (FPC) Connector

↓ Click the photos below to get more detailed product information.

Product name		NOVASTACK® 4	NOVASTACK® 35-P	NOVASTACK® 35-HDP	NOVASTACK® 35-HDN	NOVASTACK® 35-HDH	NOVASTACK® 35-PH	NOVASTACK® -B
Feature			 P	 ZenShield® P	 ZenShield®	 ZenShield®	 P	 P
		Smallest size in 0.4 mm pitch	Signal and power hybrid	High-speed (20+ Gbps) Fully-shielded High power	High-frequency (-15 GHz) High-speed (20+G bps) Fully-shielded	High-speed (40 Gbps) Fully-shielded High profile	Authentic high profile design with power pin	High power (6 A x 4 pins)
Receptacle P/N		20642-0**E	20709-0**E-**	20698-0**E-01*	20865-0**E-**	21003-0**E	20843-0**E-21	20713-004E-0*
Plug P/N		20641-0**E	20708-0**E-**	20697-0**E-01*	20864-0**E-**	21004-0**E	20842-0**E-21	20712-004E-0*
Pitch (mm)		0.4	0.35	0.35	0.35	0.35	0.35	0.4 (signal), 1.7 (power)
Pin count	Range	6 - 80	10 - 80 (signal) + 2 (power)	6 - 76 (signal) + 4 (power)	10 - 60	10-60	10 - 50 (signal) + 2 (power)	2 - 4 (signal) + 4 (power)
	Available	6, 10, 24, 30, 34, 40	10,14,18,20,24,30, 34,40,50,60	28,34,42,56,62/+4	10, 20, 30	60	10,30,40,50/+2	4+4
* Please inquire for pin counts not listed as available or outside of the pin count range.								
Mated Size (mm)	Stack height	0.6+/-0.1	0.7+/-0.1	0.7+/-0.05	0.7+/-0.05	1.5+/-0.10	1.5+/-0.06	0.6+/-0.1
	Width formula	2.50+(0.4*?p/2)	2.17+(0.35*?p/2)	4.89+(0.35*?p/2)	4.15 (10P) 5.90 (20P) 7.90 (30P)	3.3+(0.35*?p/2)	2.65+(0.35*?p/2)	3.20+(0.4*?p/2)
	Depth	1.88	2.3	3.7	2.15	3.64	2.8	2.6
Wiping length (mm)		0.1	0.19 (10~50P) 0.13 (52~80P)	Signal contact : 0.11 Power contact : 0.13	0.14	0.33	0.32	0.1
Current rating	Signal pin	0.3 A/pin			1.0 A / pin (Max. 10P) (12pin and over : 12.0 A AC/DC (Total))	0.5 A/pin (12.0 A Max. (Total))	0.3 A/pin	1.0 A/pin
	Power pin	-	2.0 A/pin x 2	2.2 A/pin x 4	-	-	3.0 A/pin x 2	6.0 A/pin x 4

I-PEX Product Series

[CLICK THE MATRIX](#)
to see latest product information



MHF[®] Series

RF connectors

[Matrix >](#)



ISH[®] and IARPB[®] Series

Discrete wire connectors

[Matrix >](#)



AP Series

Power terminals

[Matrix >](#)



CABLINER[®] Series

Micro-coaxial connectors

[Matrix >](#)



NOVASTACK[®] Series

Board-to-board connectors



MINIDOCK[™] Series

I/O connectors



DUALINE[®] Series

Twinax connectors



EVAFLEX[®] Series MINIFLEX[®] Series

FPC/FFC connectors

[Matrix >](#)



LIGHTPASS[®] Series

Optical Modules

[Matrix >](#)



Please [contact us](#) for custom products.



I-PEX, MHF, CABLINE, NOVASTACK, EVAFLEX, MINIFLEX, ISH, IARPB, IASLP, ESTORQ, i-Fit and ISFIT are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update Information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative for more detailed information. [i-pex.com]

I-PEX Inc.