
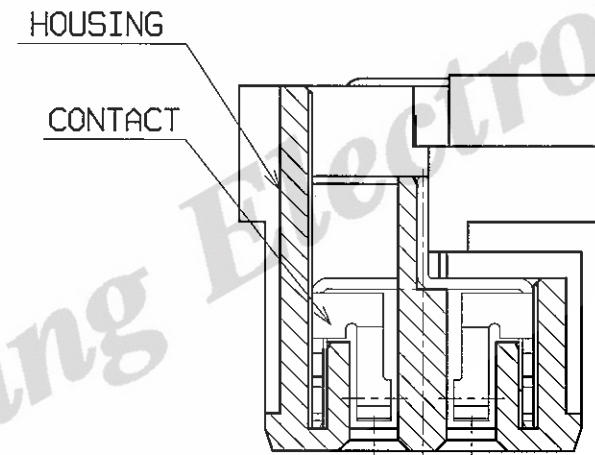
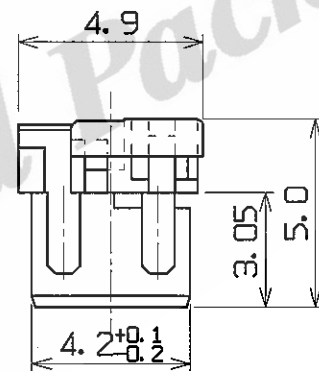
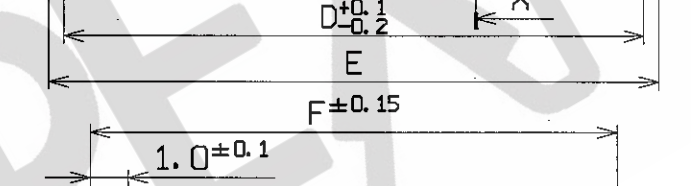
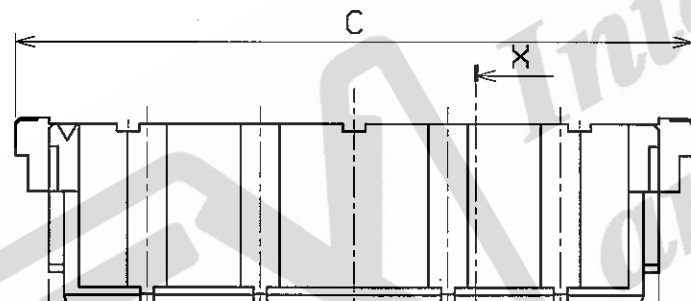
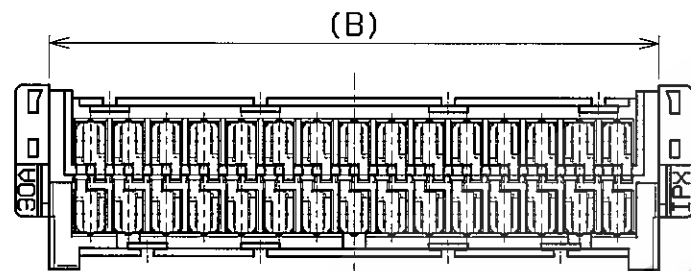


PART NO.	A	B	C	D	E	F	LEAD FREE
◆ 20282-020T-00F	9.5	11.2	13.0	10.4	11.2	9.0	YES
20282-030T-00F	14.5	16.2	18.0	15.4	16.2	14.0	
20282-040T-00F	19.5	21.2	23.0	20.4	21.2	19.0	
◆ 20282-050T-00F	24.5	26.2	28.0	25.4	26.2	24.0	

◆ MARK MEANS UNDER DEVELOPING.

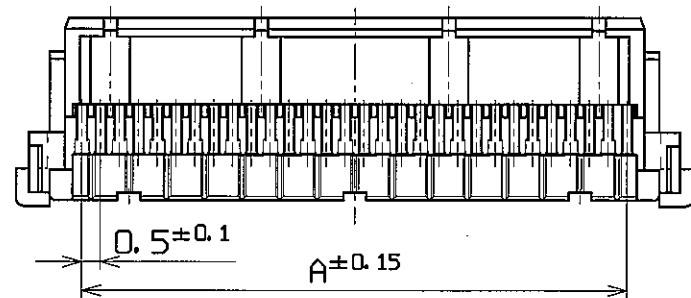

SECT. X-X
(S=10/1)


NOTES

- MATERIAL & FINISH
HOUSING : LCP(GF REINFORCED) UL94V-0 NATURAL
CONTACT : COPPER ALLOY
PLATING: Au OVER Ni
- 本部品は、COAXIAL CABLE 半田付の後
SHELL A(P/N 1849-0***F) & SHELL B(P/N 1850-0***F)ト
組立られた場合、P/N 20281-0**B-00Fトナル。(R/A-TYPE)

SHELL A(P/N 1791-0***F) & SHELL B(P/N 1792-0***F)ト
組立られた場合、P/N 20316-0**B-00Fトナル。(ST-TYPE)

GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°

FORM REV. 4

3	206403	K. T	Aug./18/'06	J. H	DESIGN'D BY	DATE	 Interconnect and Packaging Electronics TOKYO, JAPAN	TITLE DUALCOAX R/A & ST TYPE HOUSING ASS'Y (SHELL A, B ASSEMBLE AFTER SOLDERED THE CABLE)			
2	204408	T. K	NOV/24/'04	T. H	CHK'D BY	DATE					
1	022034	T. T	APR/01/'02	K. K	Y. S	FEB/22/'01					
0	021012	Y. S	FEB/22/'01		Y. H	FEB/23/'01					
REV	ECN	BY	DATE	APP	K. KATABUCHI	FEB/26/'01	APP'D BY	DATE			
REV. RECORD					CUSTOMER COPY	PROJECTION	SCALE	UNIT	DWG. No.	SHEET	REV.
SERIES No. 2812							5/1	MM	20282	1/1	3

WAS T