

Recommended P/N 20858-0**T-01



PART NO.	Pos.	A	B	C
20858-040T-01	40	20.65	18.66	20.40
20858-060T-01	60	28.65	26.66	28.40



Halogen Free



RoHS Compliant

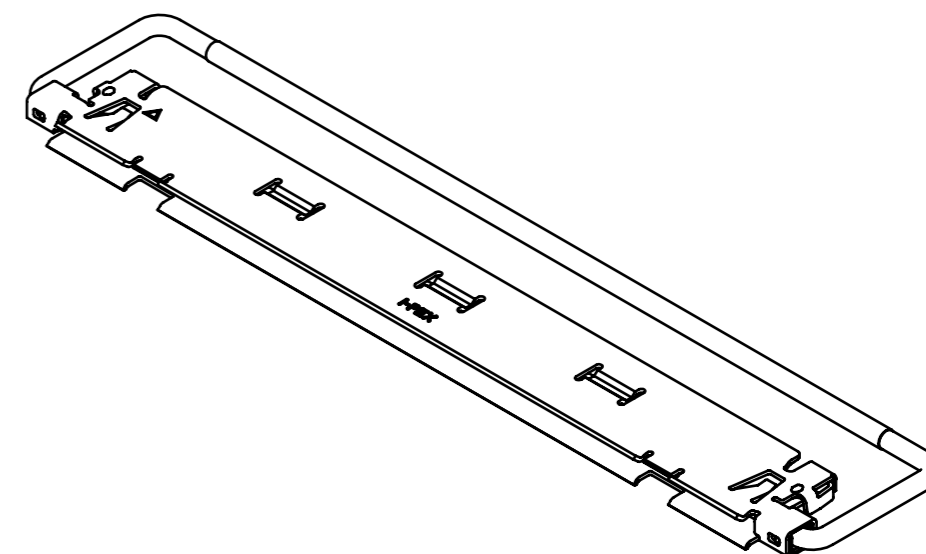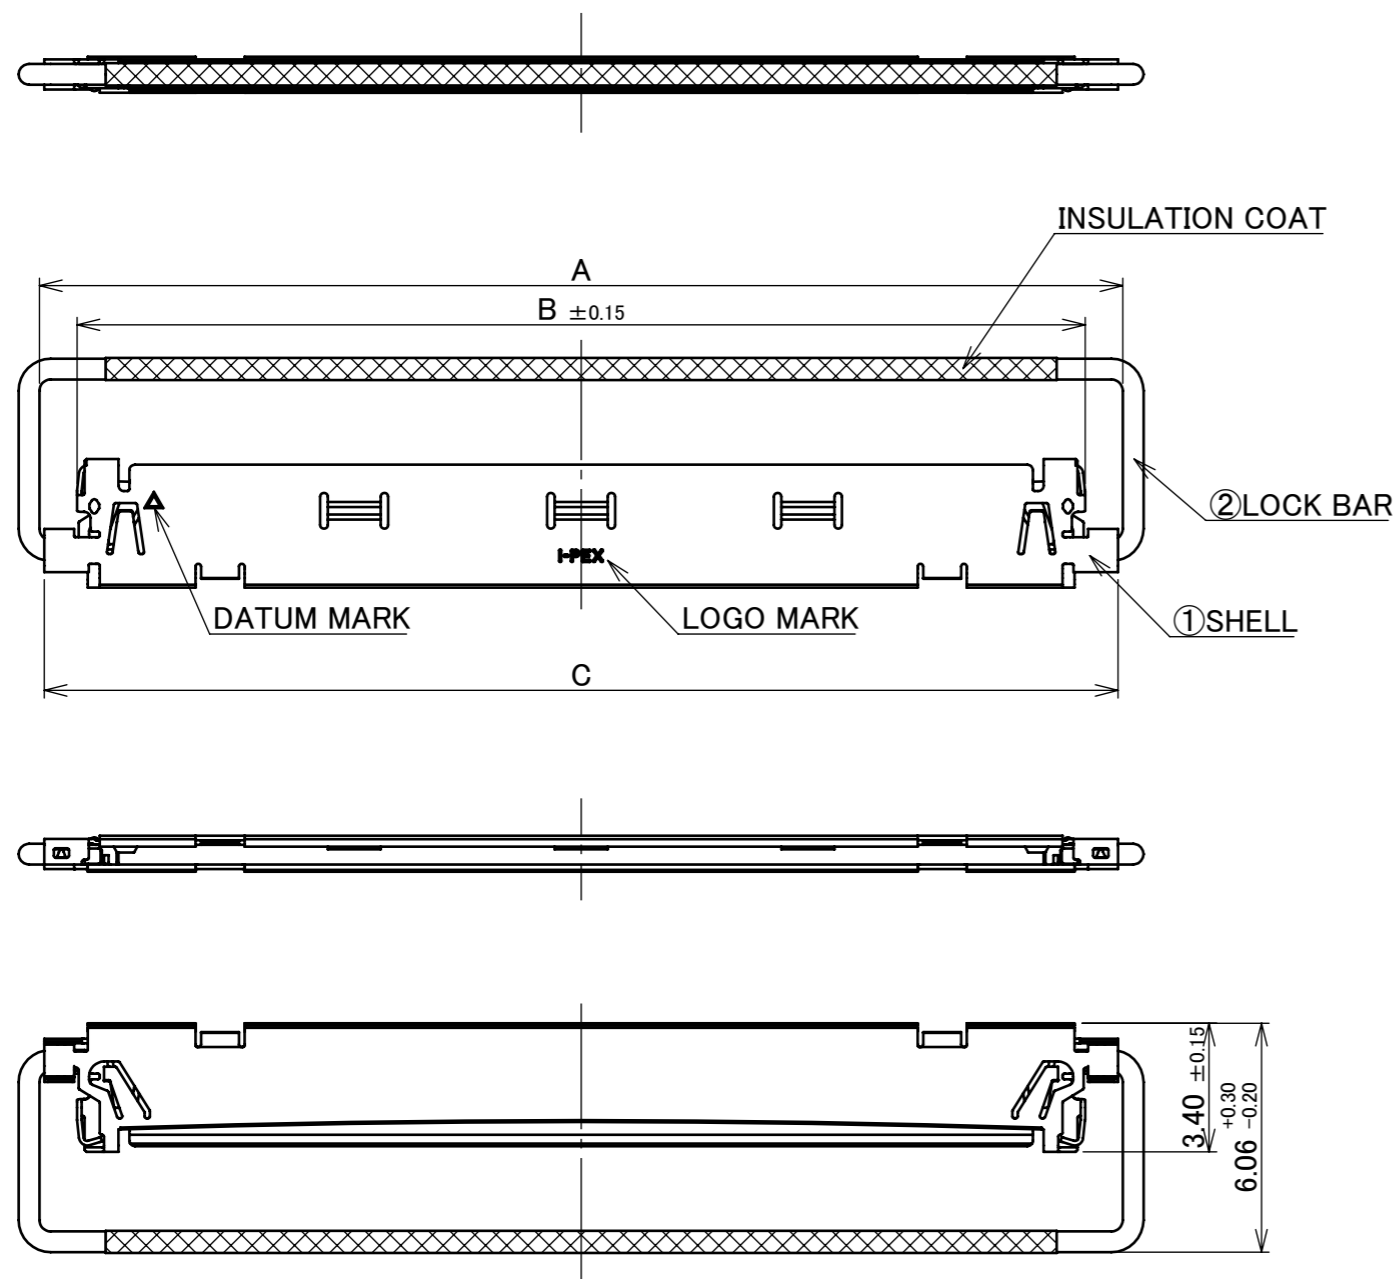

2	LOCK BAR	SUS	-
1	SHELL	PHOSPHOR BRONZE	PARTIAL Au 0.003 μm MIN. OVER Ni 1.00 μm MIN.
NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS

8	Z240413	T.O	2024/04/04	T.M	ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. R1	CUSTOMER COPY	
7	Z240332	T.O	2024/03/18	T.M	6 MAX.	±0.2	30 OVER 120 MAX.	±0.5				
6	Z230865	T.O	2023/07/26	H.I	GENERAL TOLERANCE.				TITLE CABLINER [®] -CAF SHELL ASSEMBLY	SCALE 5:1	UNIT mm	I-PEX
5	Z230463	T.O	2023/04/21	H.I	DWG.	Y.Sasa	DATE	2018/12/25				
4	Z230351	T.O	2023/03/27	H.I	CHK.	T.Masunaga						
3	Z210921	M.M	2021/08/30	H.I	APP.	H.Ikari			DWG. No. 20858	SIZE A3	SHEET 1/6	REV. 8
REV.	ECN	BY	DATE	APP.	REVISION RECORD							

PART NO.	Pos.	B	C	D	E	F
20858-040T-01	40	18.66	20.40	21.75	16.40	15.60
20858-060T-01	60	26.66	28.40	29.75	24.40	23.60

FPC ASSEMBLY STATE









Halogen Free



RoHS Compliant

PLUG SHELL ASSEMBLY : CABLINE-CAF
P/N : 20858-0**T-01



RECEPTACLE : CABLINE-CA
P/N : 20525-***E-0##

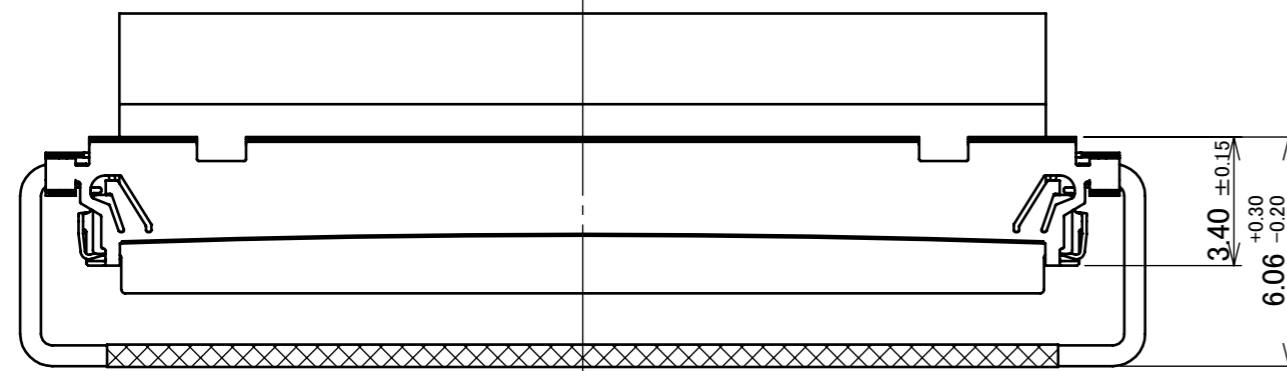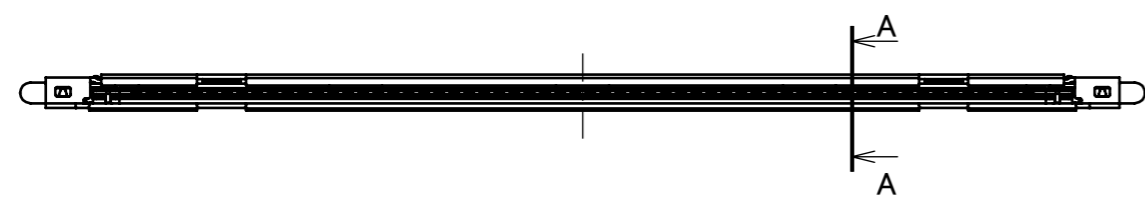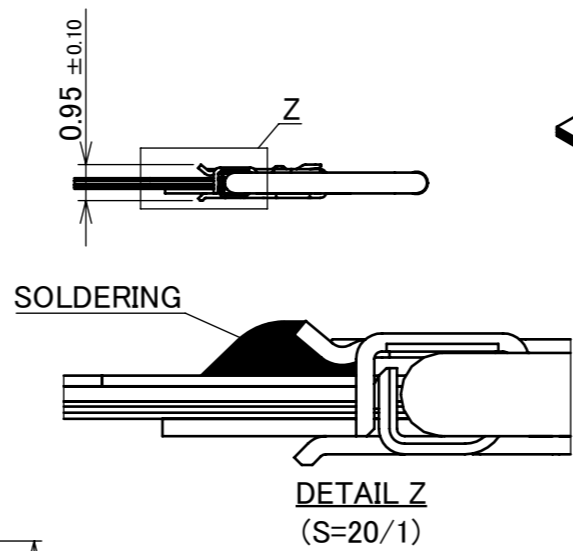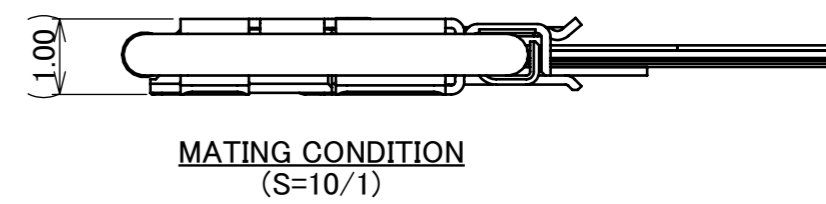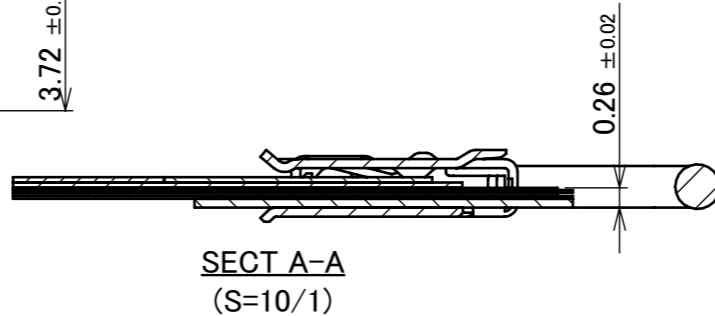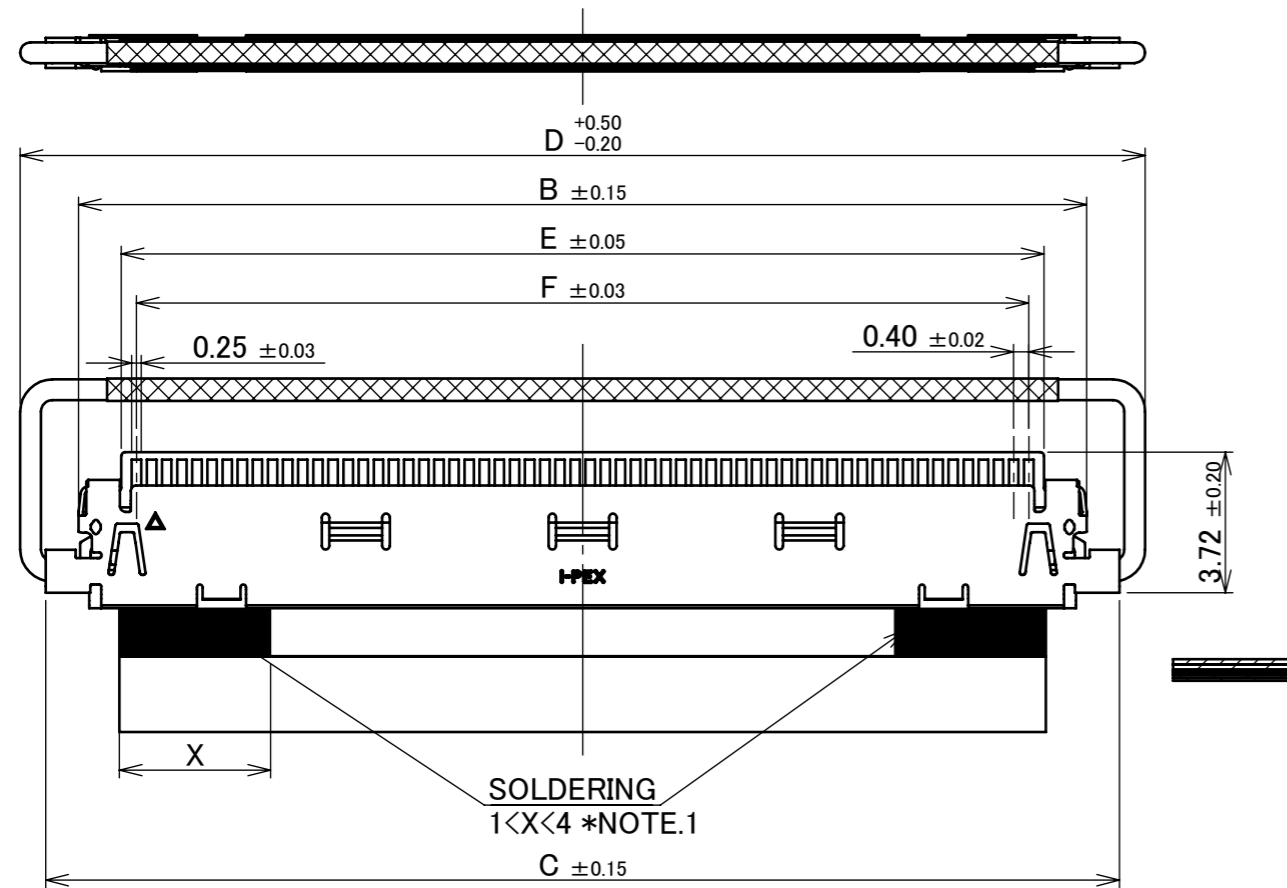

NOTES.
1. SOLDERING AREA X IS RECOMMENDED DIMENSION.
IT DOES NOT MATTER IF IT MIGHT BE EXCEED THE DIMENSION.




ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. R1	CUSTOMER COPY			
	6 MAX.	±0.2	30 OVER 120 MAX.						±0.5
GENERAL TOLERANCE.				TITLE		SCALE	I-PEX		
DWG.	DATE			CABLINE® -CAF SHELL ASSEMBLY		5:1			
CHK.						UNIT			
APP.				DWG. No. 20858		mm			
						SIZE	SHEET	REV.	
						A3	2/6	8	

ITEMS	SPECIFICATION
RATING VOLTAGE	100V AC (PER CONTACT)
RATING AMPERAGE (FOR SIGNAL CONTACT)	0.5A AC/DC (PER CONTACT) ※AVAILABLE UP TO 14PIN 0.3A AC/DC (PER CONTACT) ※AVAILABLE UP TO ALL PIN
OPERATING TEMPERATURE	233~358K(-40°C~+85°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
CONTACT RESISTANCE (FOR SIGNAL CONTACT)	INITIAL : 60mohm MAX. / AFTER TEST : \triangleleft 40mohm MAX.
GROUND SHELL RESISTANCE	INITIAL : 60mohm MAX. / AFTER TEST : \triangleleft 40mohm MAX.
INSULATION RESISTANCE	INITIAL : 1000Mohm MIN. / AFTER TEST : 500Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	30 CYCLES
MATING FORCE (INITIAL / AFTER TEST)	40P : 11.07N MAX. 60P : 16.61N MAX.
UNMATING FORCE (INITIAL / AFTER TEST)	40P : 1.44N MIN. 60P : 2.16N MIN.
PRODUCT SPECIFICATION	PRS-2465
TEST REPORT	TR-18016
PACKING STANDARD	PST-17138
INSTRUCTION MANUAL	HIM-18016
ASSEMBLY MANUAL	ASM-18005
APPEARANCE CRITERIA No.	QLS-A***

ANGLE	$\pm 2^\circ$	6 OVER 30 MAX.	± 0.3	PROJECTION 	SERIES No. R1	CUSTOMER COPY		
6 MAX.	± 0.2	30 OVER 120 MAX.	± 0.5					
GENERAL TOLERANCE.				TITLE CABLIN [®] -CAF SHELL ASSEMBLY	SCALE 	I-PEX		
DWG.	DATE							
CHK.								
APP.								
				DWG. No.	20858	SIZE A3	SHEET 3/6	REV. 8

PART NO.	Pos.	E	F	G	H
20858-040T-01	40	16.40	15.60	17.90	16.50
20858-060T-01	60	24.40	23.60	25.90	24.50

RECOMMENDED FPC LAYOUT 【SHIELDED FPC】

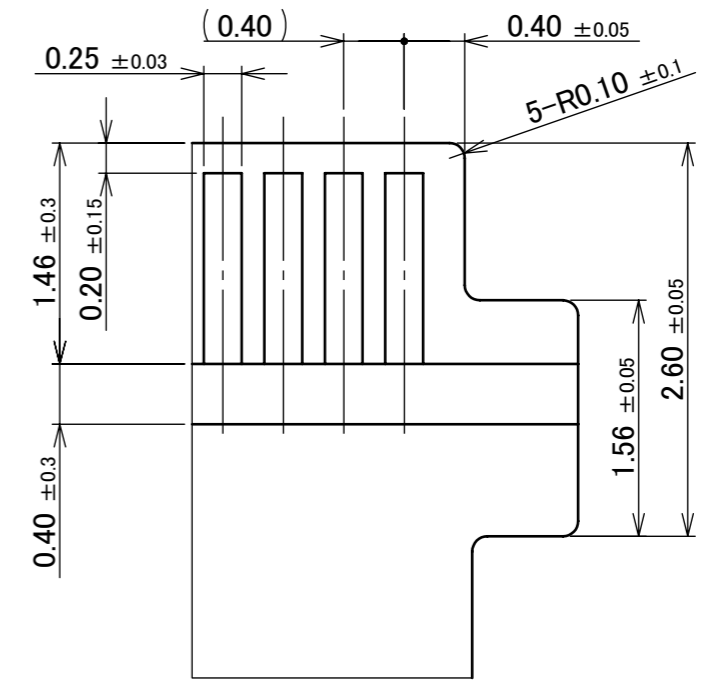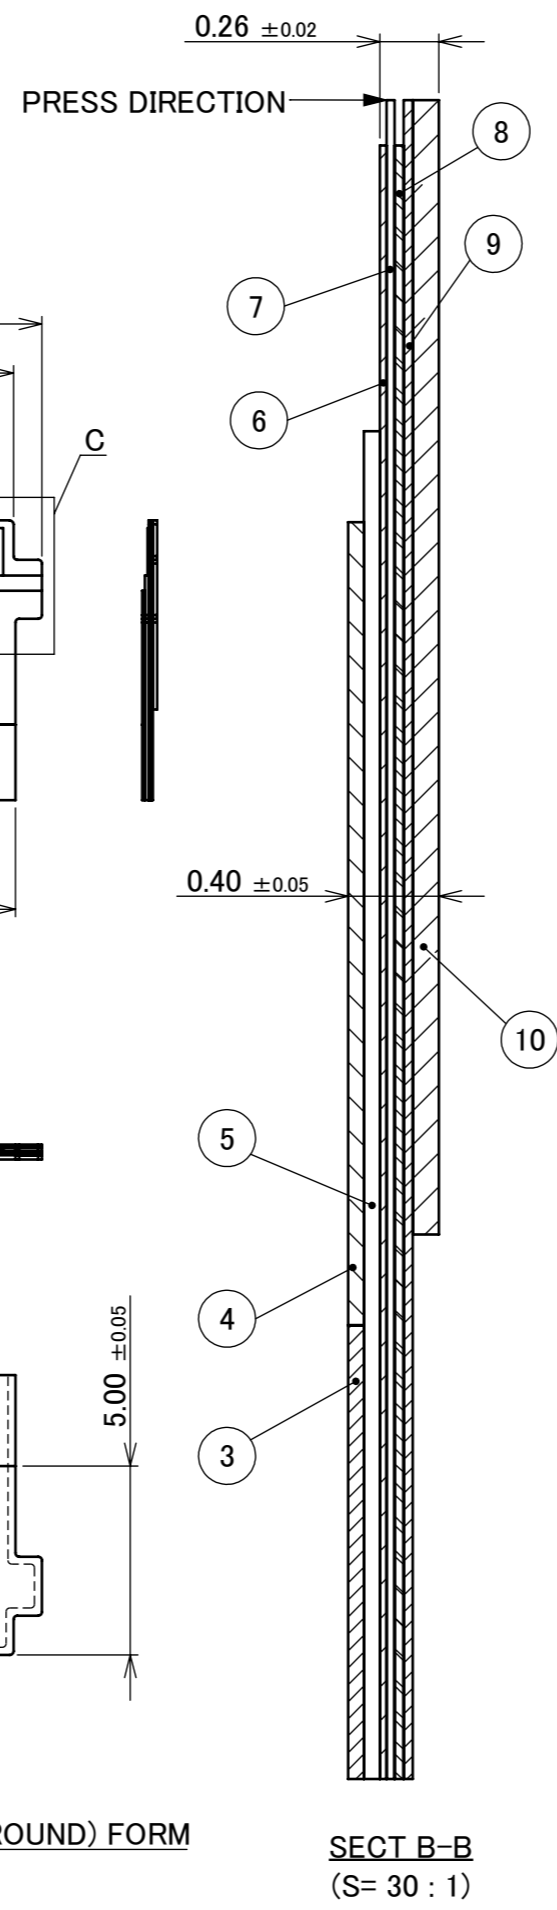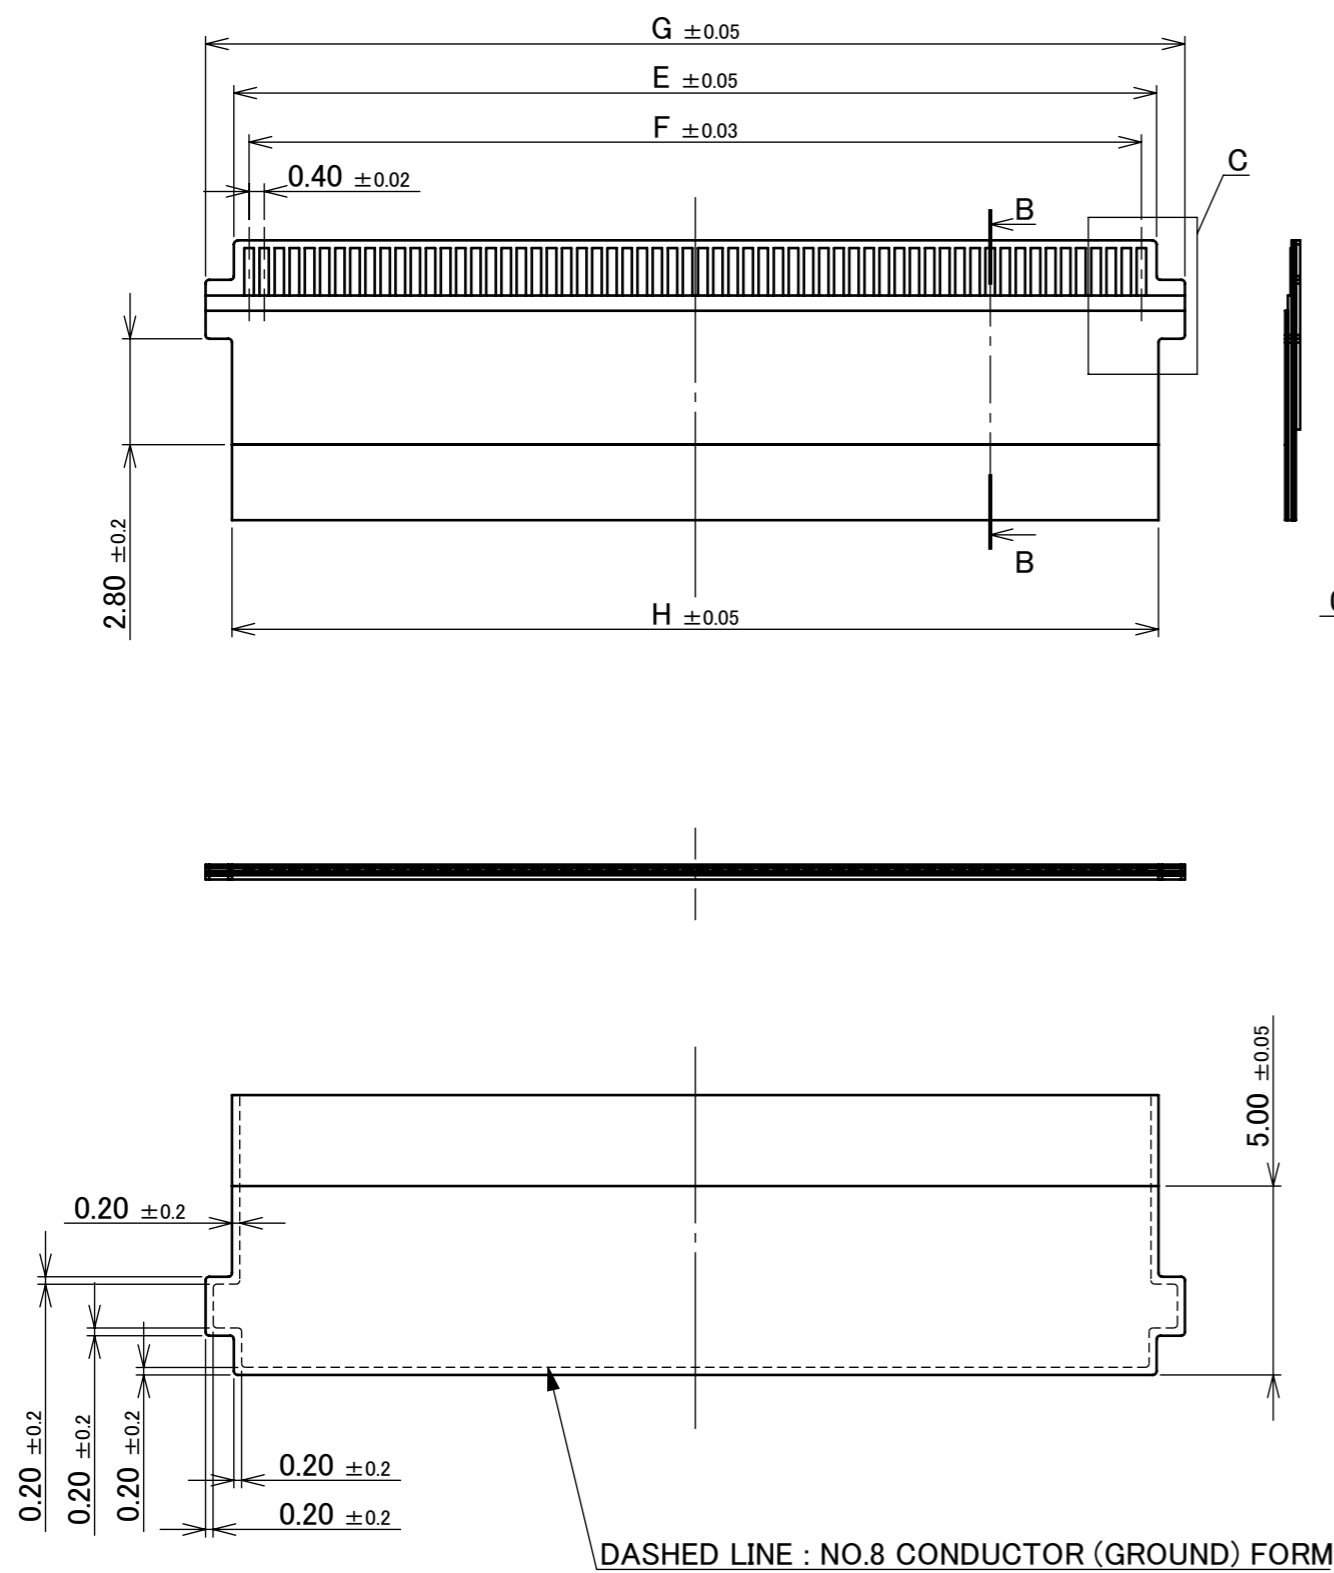

NOTES.




- ADHESIVE SHOULD USE THERMOSETTING.
- NO.3 : SHIELD FILM AND NO.4, NO.8 : CONDUCTOR (GROUND) ARE CARRYING OUT THE ELECTRICAL CONNECTION.
- NO.4 : CONDUCTOR (GROUND) AND NO.8 : CONDUCTOR (GROUND) ARE CARRYING OUT THE ELECTRICAL CONNECTION.
- NO.3 : SHIELD FILM AND NO.6 : CONDUCTOR (SIGNAL) ARE NOT CONTACTING.
- NO.4, NO.8 : CONDUCTOR (GROUND) AND NO.6 : CONDUCTOR (SIGNAL) ARE NOT CONTACTING.

No.	DESCRIPTION	MATERIAL	PLATING
3	SHIELD FILM	-	-
4	CONDUCTOR (GROUND)	Cu	Ni, Au
5	INSULATOR	-	-
6	CONDUCTOR (SIGNAL)	Cu	Ni, Au
7	INSULATOR	-	-
8	CONDUCTOR (GROUND)	Cu	Ni
9	INSULATOR	-	-
10	REINFORCING TAPE	-	-


ANGLE	$\pm 2^\circ$	6 OVER 30 MAX.	± 0.3	PROJECTION ①	SERIES No. R1	CUSTOMER COPY			
6 MAX.	± 0.2	30 OVER 120 MAX.	± 0.5						
GENERAL TOLERANCE.				TITLE CABLINER [®] -CAF SHELL ASSEMBLY	SCALE 5:1	UNIT mm			
DWG.	DATE		DWG. No. 20858				SIZE A3	SHEET 4/6	REV. 8
CHK.									
APP.									

PART NO.	Pos.	E	F	G	H
20858-040T-01	40	16.40	15.60	17.90	16.50
20858-060T-01	60	24.40	23.60	25.90	24.50

RECOMMENDED FPC LAYOUT 【NON SHIELDED FPC】

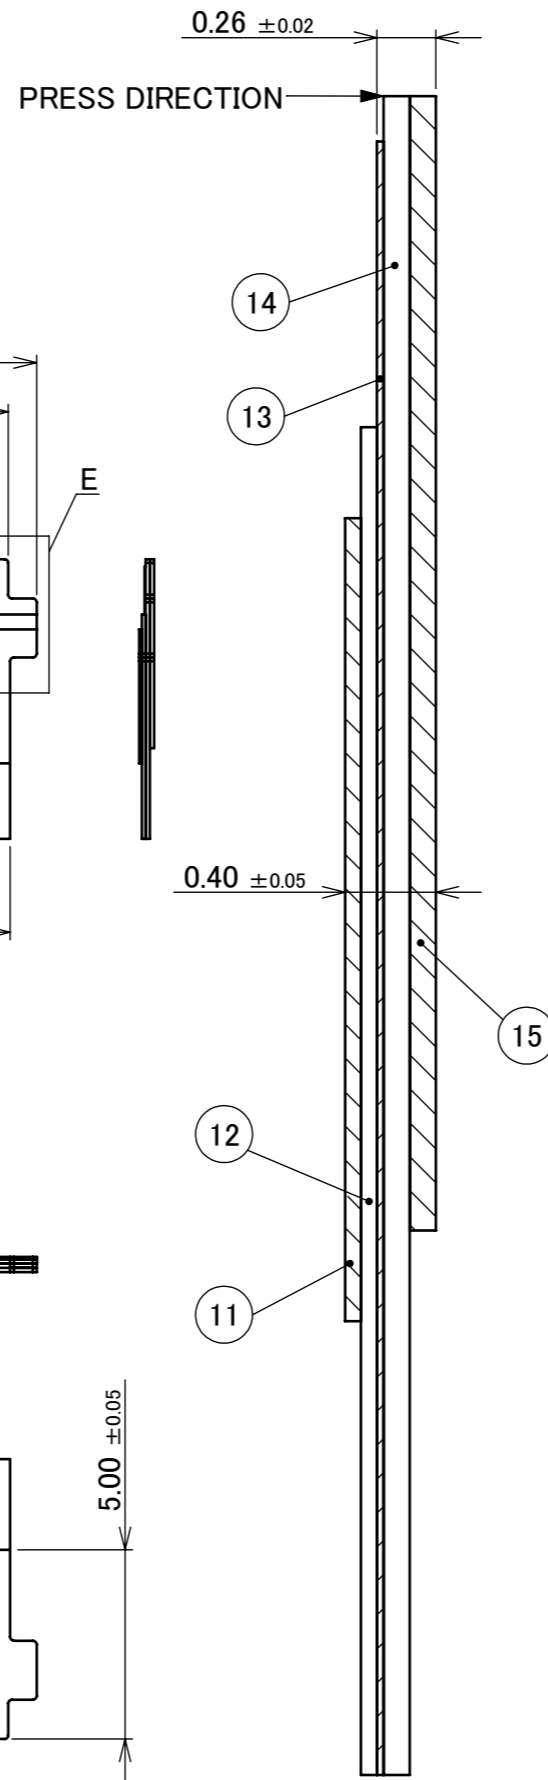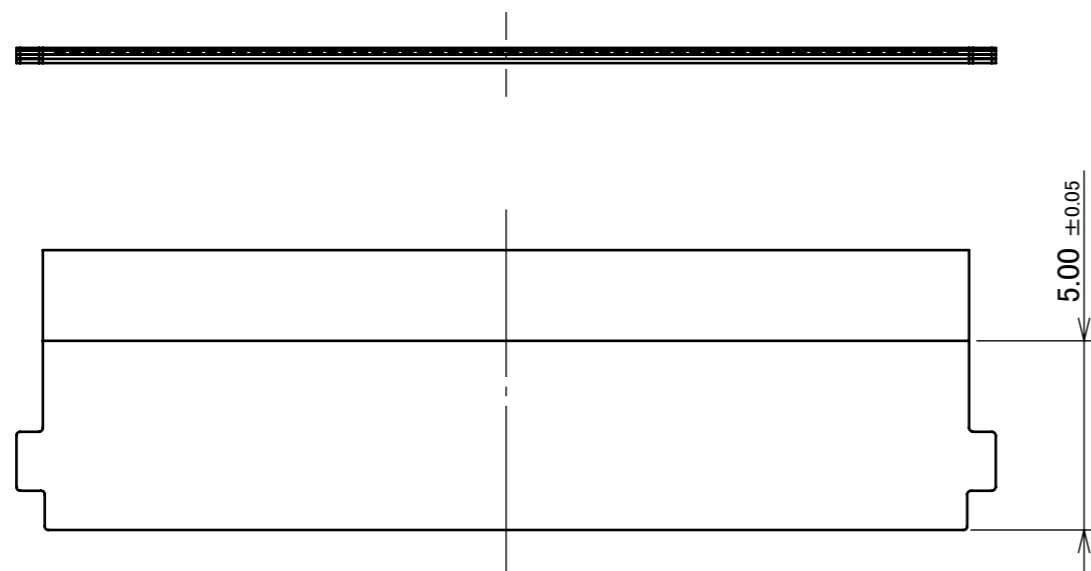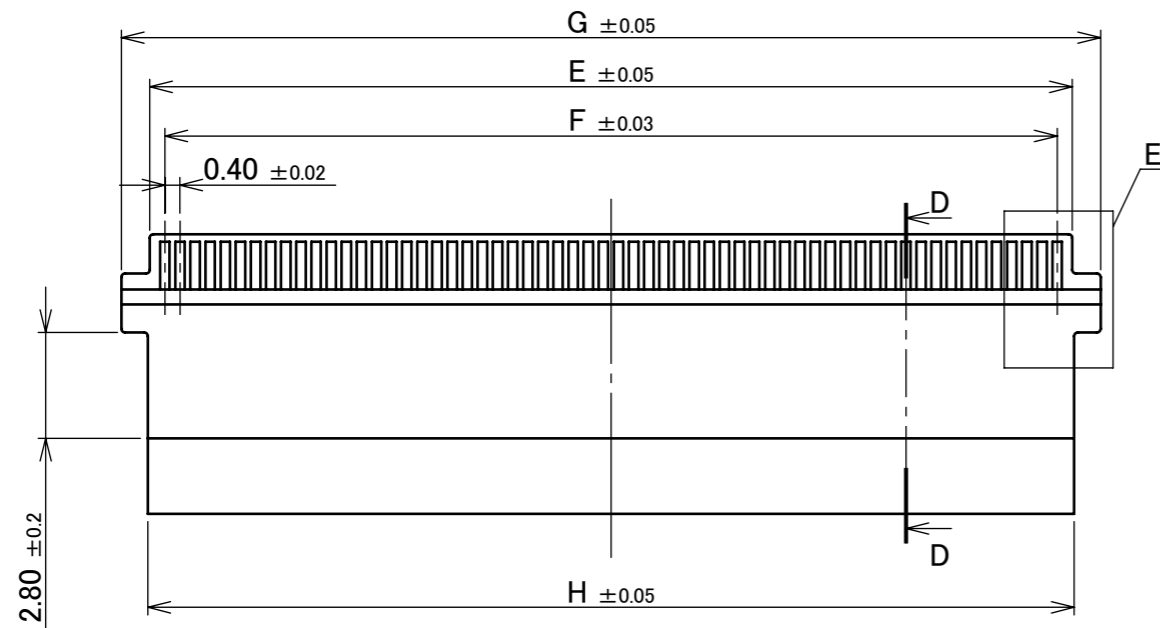

SECT D-D
(S= 30 : 1)

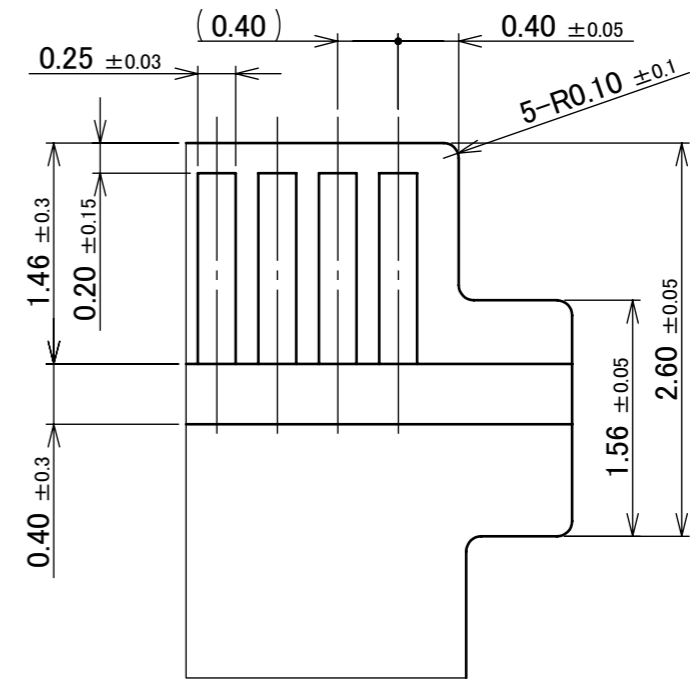

DETAIL E
(S=20:1)




NOTES.

- ADHESIVE SHOULD USE THERMOSETTING.
- NO.11 : CONDUCTOR (GROUND) AND NO.1: SHELL ARE CARRYING OUT THE ELECTRICAL CONNECTION BY SOLDERING.
- NO.11 : CONDUCTOR (GROUND) AND NO.13 : CONDUCTOR (SIGNAL) ARE NOT CONTACTING.

No.	DESCRIPTION	MATERIAL	PLATING
11	CONDUCTOR (GROUND)	Cu	Ni, Au
12	INSULATOR	-	-
13	CONDUCTOR (SIGNAL)	Cu	Ni, Au
14	INSULATOR	-	-
15	REINFORCING TAPE	-	-

ANGLE	$\pm 2^\circ$	6 OVER 30 MAX.	± 0.3	PROJECTION	SERIES No.	CUSTOMER COPY		
6 MAX.	± 0.2	30 OVER 120 MAX.	± 0.5		R1			
GENERAL TOLERANCE.				TITLE	SCALE	I-PEX		
DWG.	DATE			CABLIN [®] -CAF SHELL ASSEMBLY	5:1			
CHK.					UNIT			
APP.					mm			
				DWG. No.	20858	SIZE	SHEET	REV.
						A3	5/6	8

PART NO.	J	QTY. IN DITCH (PIECES / DITCH)	QTY. IN TRAY (PIECES / TRAY)	QTY. PER SHIPPING CARTON (TRAYS / S CARTON)	QTY. PER PACKING CARTON (S CARTON / P CARTON)
20858-040T-01	29.00	1	100	20 / S CARTON =2000	4 / P CARTON = 8000
20858-060T-01	32.00	1	100	20 / S CARTON =2000	4 / P CARTON = 8000

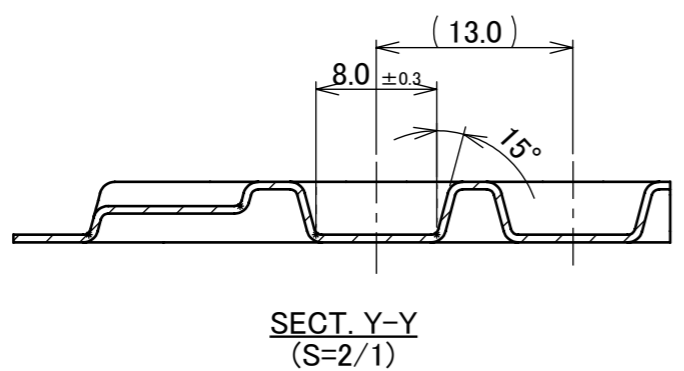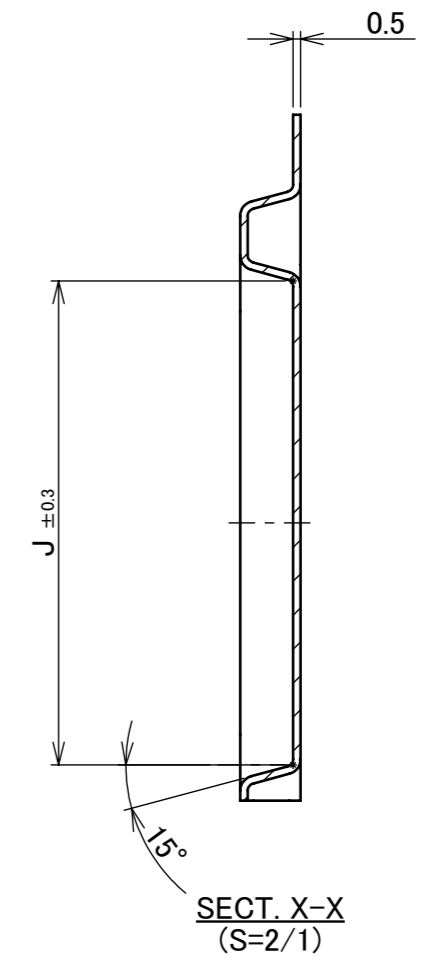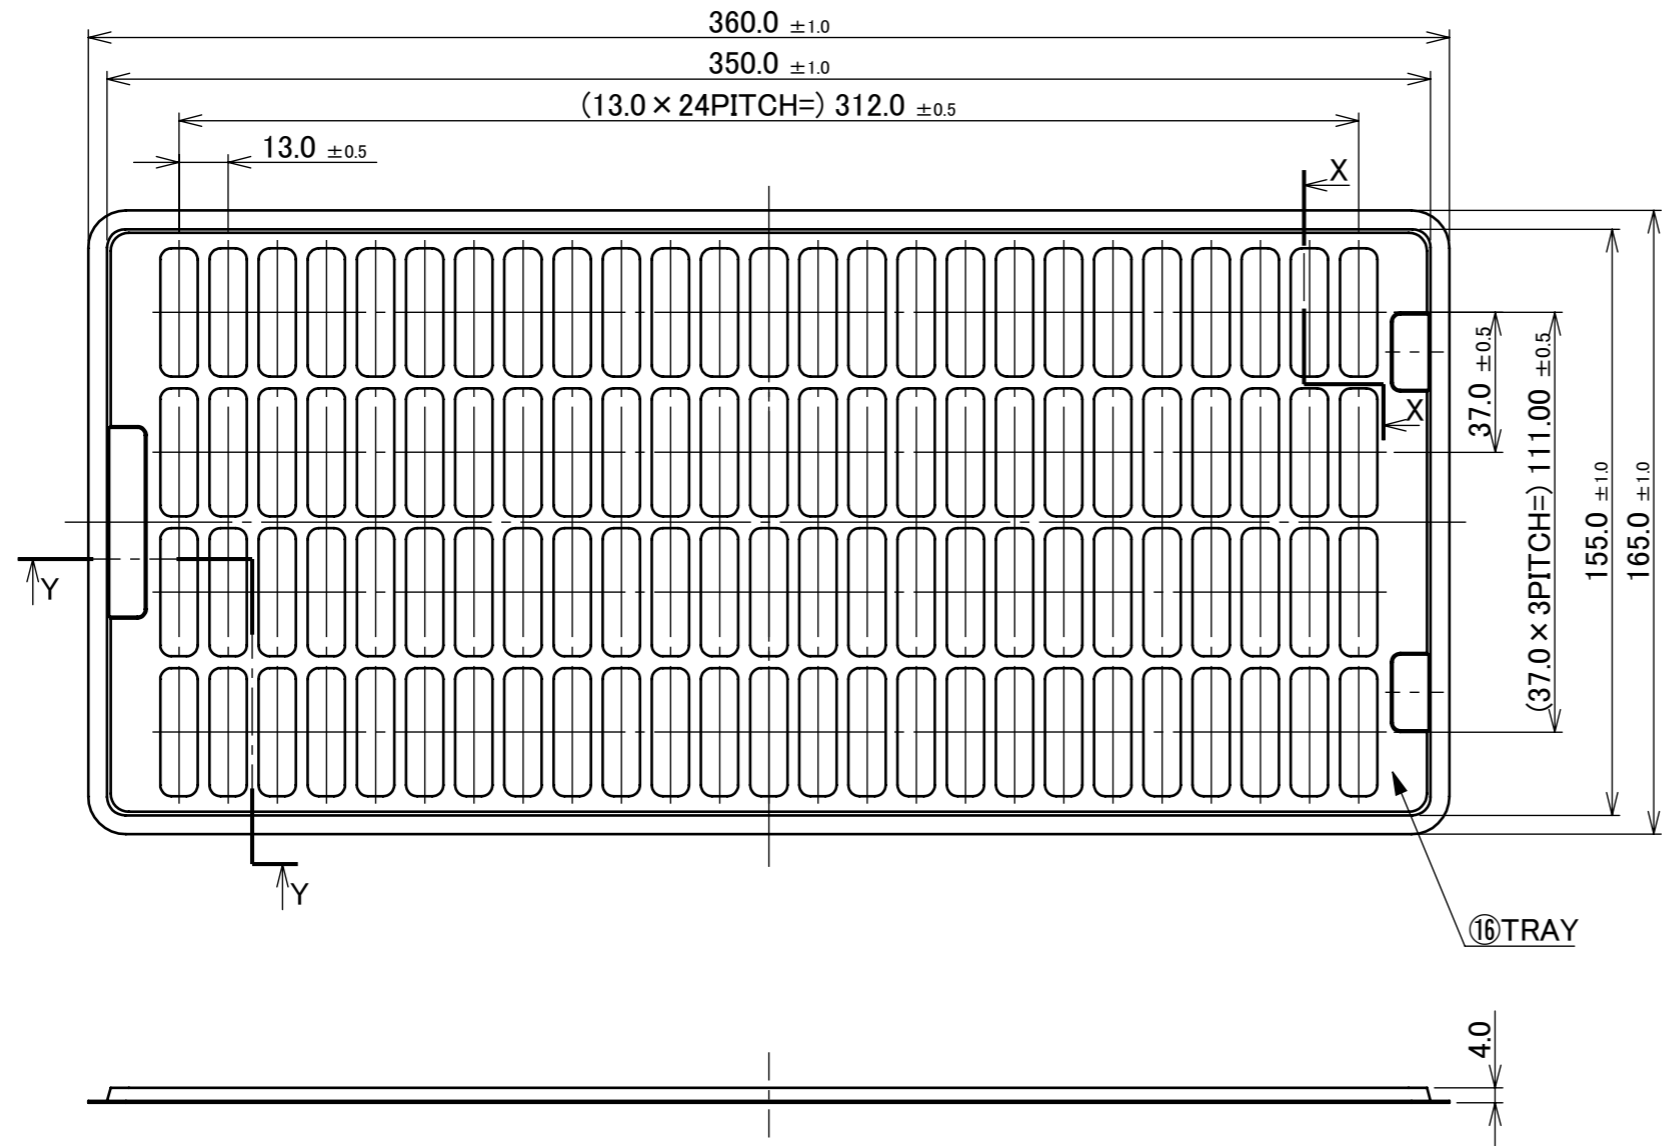

16	TRAY	PP	ANTI-STATIC TYPE
NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
ANGLE	±2°	6 OVER 30 MAX.	±0.3
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5
GENERAL TOLERANCE.		PROJECTION	SERIES No.
DWG.	DATE		R1
CHK.		TITLE	
APP.		CABLIN® -CAF SHELL ASSEMBLY	
		DWG. No.	20858
SCALE	UNIT		CUSTOMER COPY
1:2	mm		
SIZE	SHEET	REV.	
A3	6/6	8	