

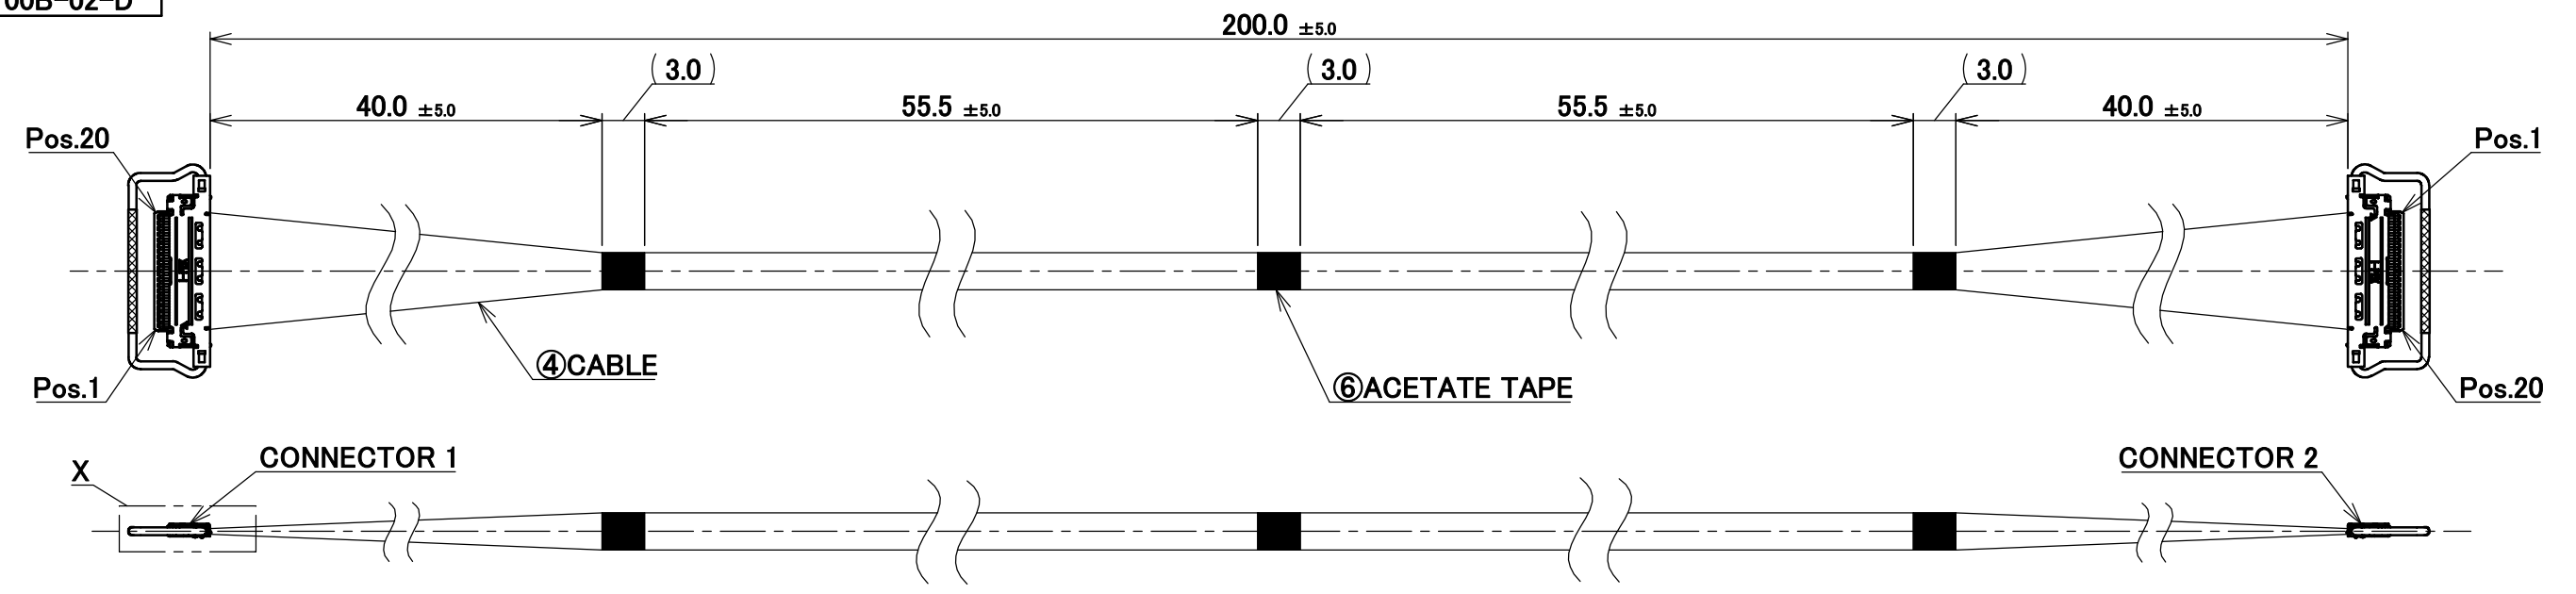


PART No.
81786-100B-02-D

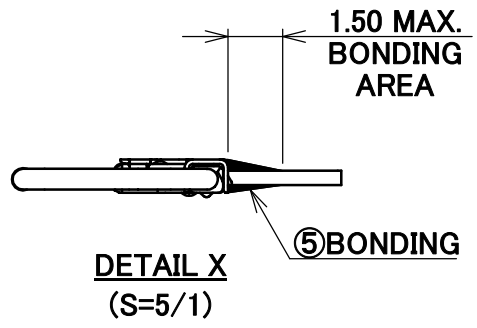

CONNECTOR 1&2
(S=5/1)

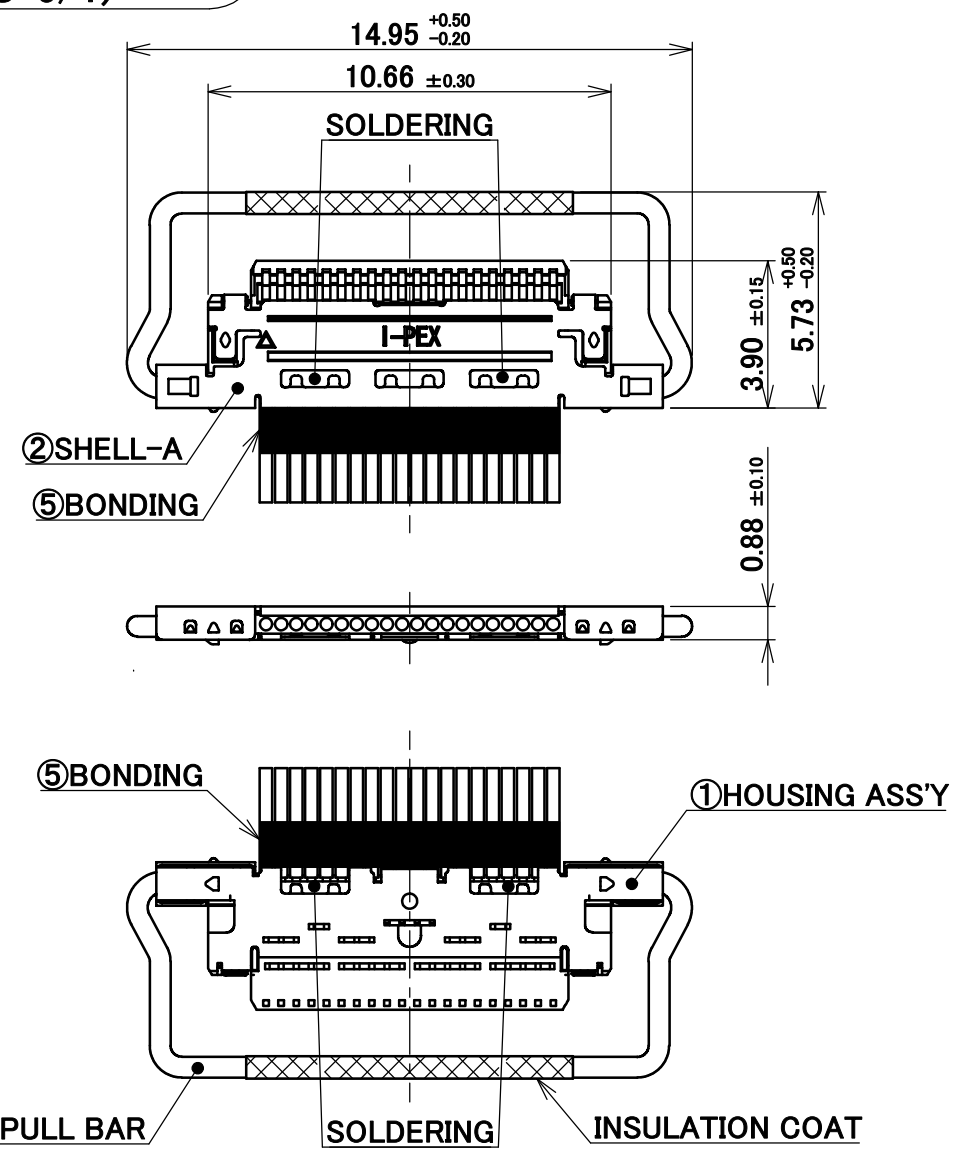

NOTE.

1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-09008.
2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
20	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
19	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	19
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	20

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
6	ACETATE TAPE	-	3	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	20	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	PULL BAR	2766-0201	2	CONNECTOR 1&2 CABLIN [®] -CA PLUG P/N : 20633-220T-01S CONNECTOR TO BE MATED : 20525-020E-02
2	SHELL-A	2764-0201-002	2	
1	HOUSING ASS'Y	20634-120T-02	2	

REVISION RECORD				ANGLE $\pm 2^\circ$ 6 OVER 30 MAX. ± 0.3 6 MAX. ± 0.2 30 OVER 120 MAX. ± 0.5	PROJECTION 	SERIES No. IH-200016	CUSTOMER COPY
0 Z231133 R.T Sept./20/'23				GENERAL TOLERANCE. DWG. R.Takei DATE 2023/09/20 CHK. - APP. H.Ikari	TITLE CABLIN [®] -CA 20P HARNESS	SCALE 2:1 UNIT mm	
REV.	ECN	BY	DATE	DWG. No. 81786	SIZE A3	SHEET 1/1	