




PART No.  
81423-100B-02-D

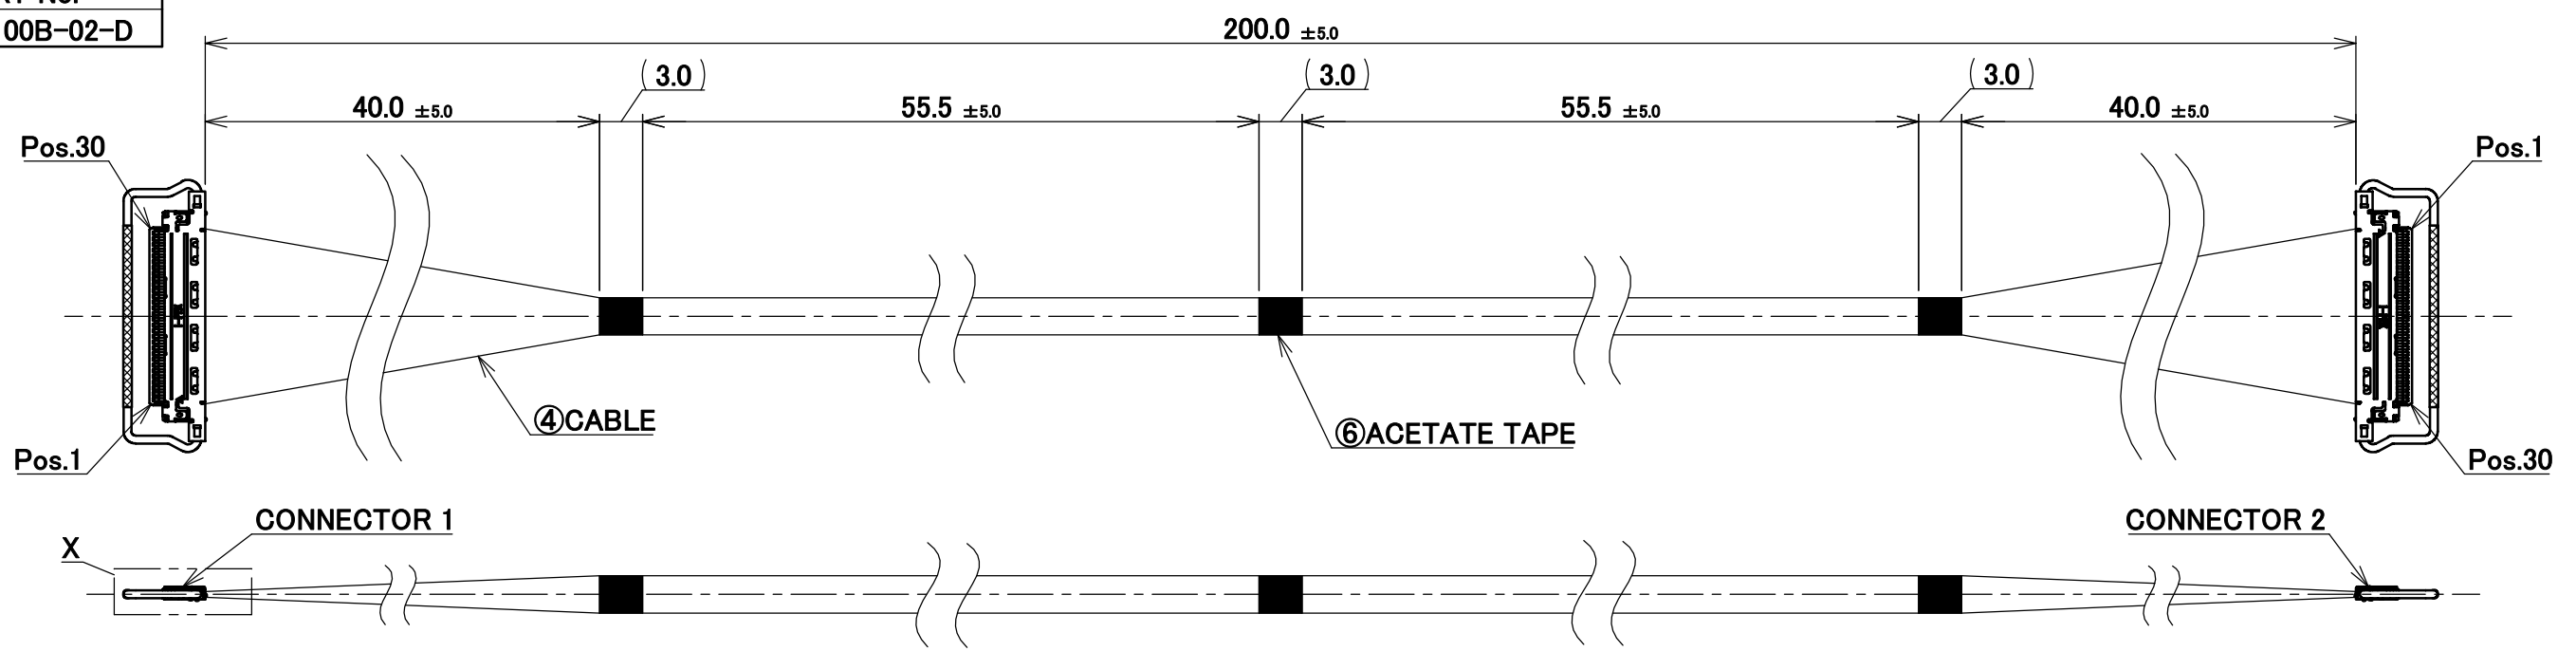


CONNECTOR 1&2  
(S=5/1)

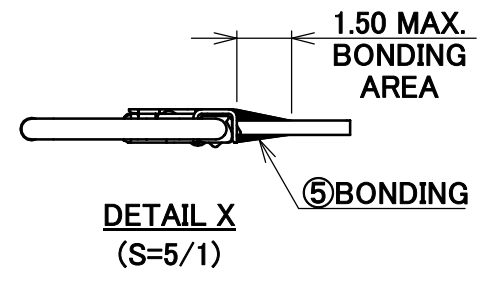

NOTE.  
1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-09008.  
2. ELECTRIC CHARACTERISTICS  
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.  
INSULATION RESISTANCE : 50MΩ MIN. DC 100V  
3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.

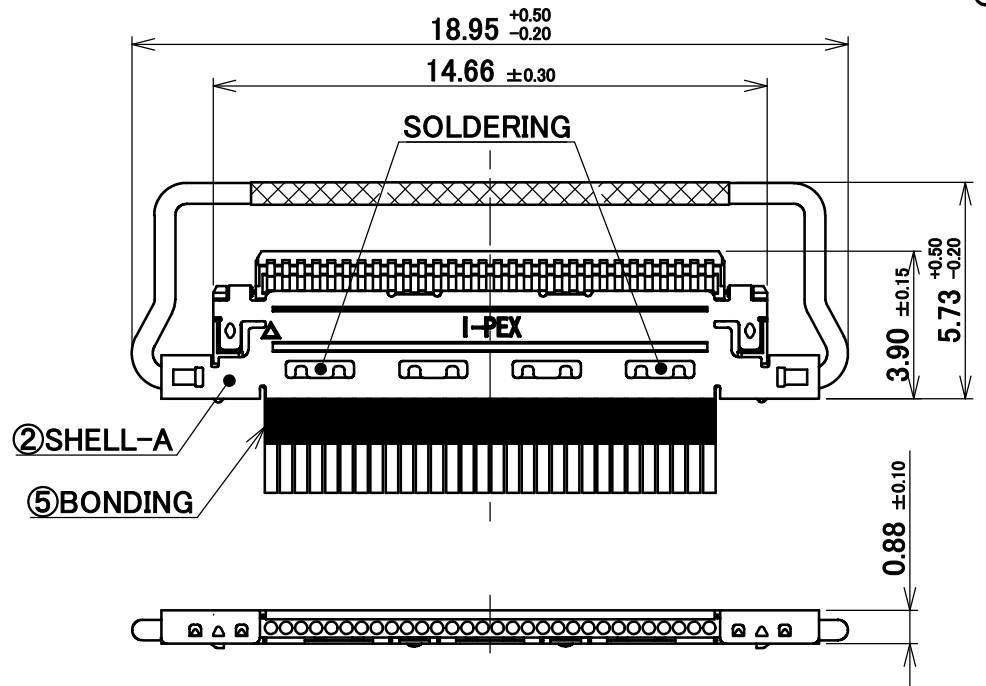

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
30	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
29	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	29
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	30

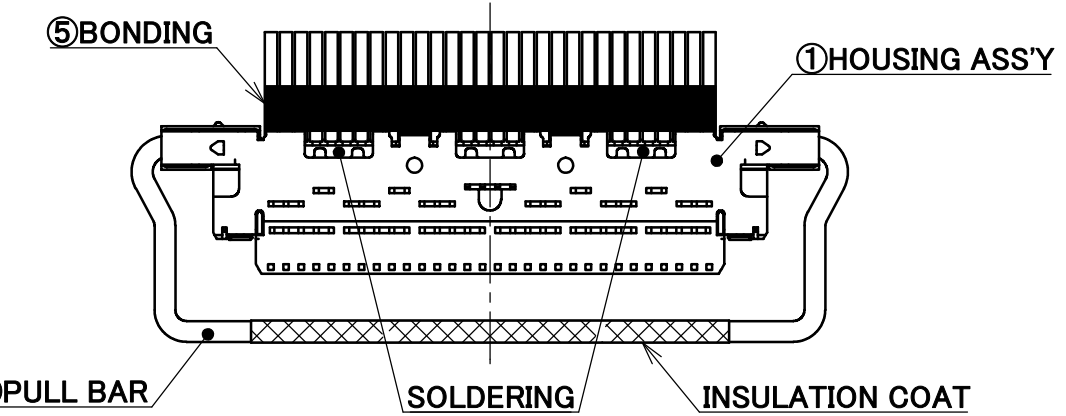

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
6	ACETATE TAPE	-	3	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	30	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	PULL BAR	2766-0301	2	CONNECTOR 1&2 CABLIN <sup>®</sup> -CA PLUG P/N : 20633-230T-01S CONNECTOR TO BE MATED : 20525-030E-02
2	SHELL-A	2764-0301-002	2	
1	HOUSING ASS'Y	20634-130T-02	2	

REV.	ECN	BY	DATE	APP.	ANGLE	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.	CUSTOMER COPY
					±2°	6 OVER 30 MAX.	±0.3		IH-200016	CUSTOMER COPY
					6 MAX.	30 OVER 120 MAX.	±0.5			
REVISION RECORD					GENERAL TOLERANCE.			TITLE		SCALE
2	Z231133	R.T	Sept./20/'23	H.I	DWG.	DATE	2020/05/11	CABLIN <sup>®</sup> -CA 30P HARNESS		2:1
1	Z200915	K.B	Sept./02/'20	H.I	CHK.					UNIT
0	Z200494	K.B	May/11/'20		APP.					mm
								DWG. No. 81423		SIZE
										A3
										SHEET
										1/1
										REV.
										2

Confidential C

I-PEX Inc.

QKE-DFE06-02 REV.12