
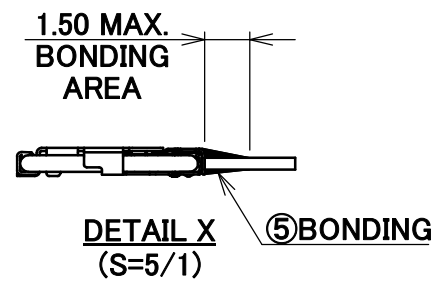
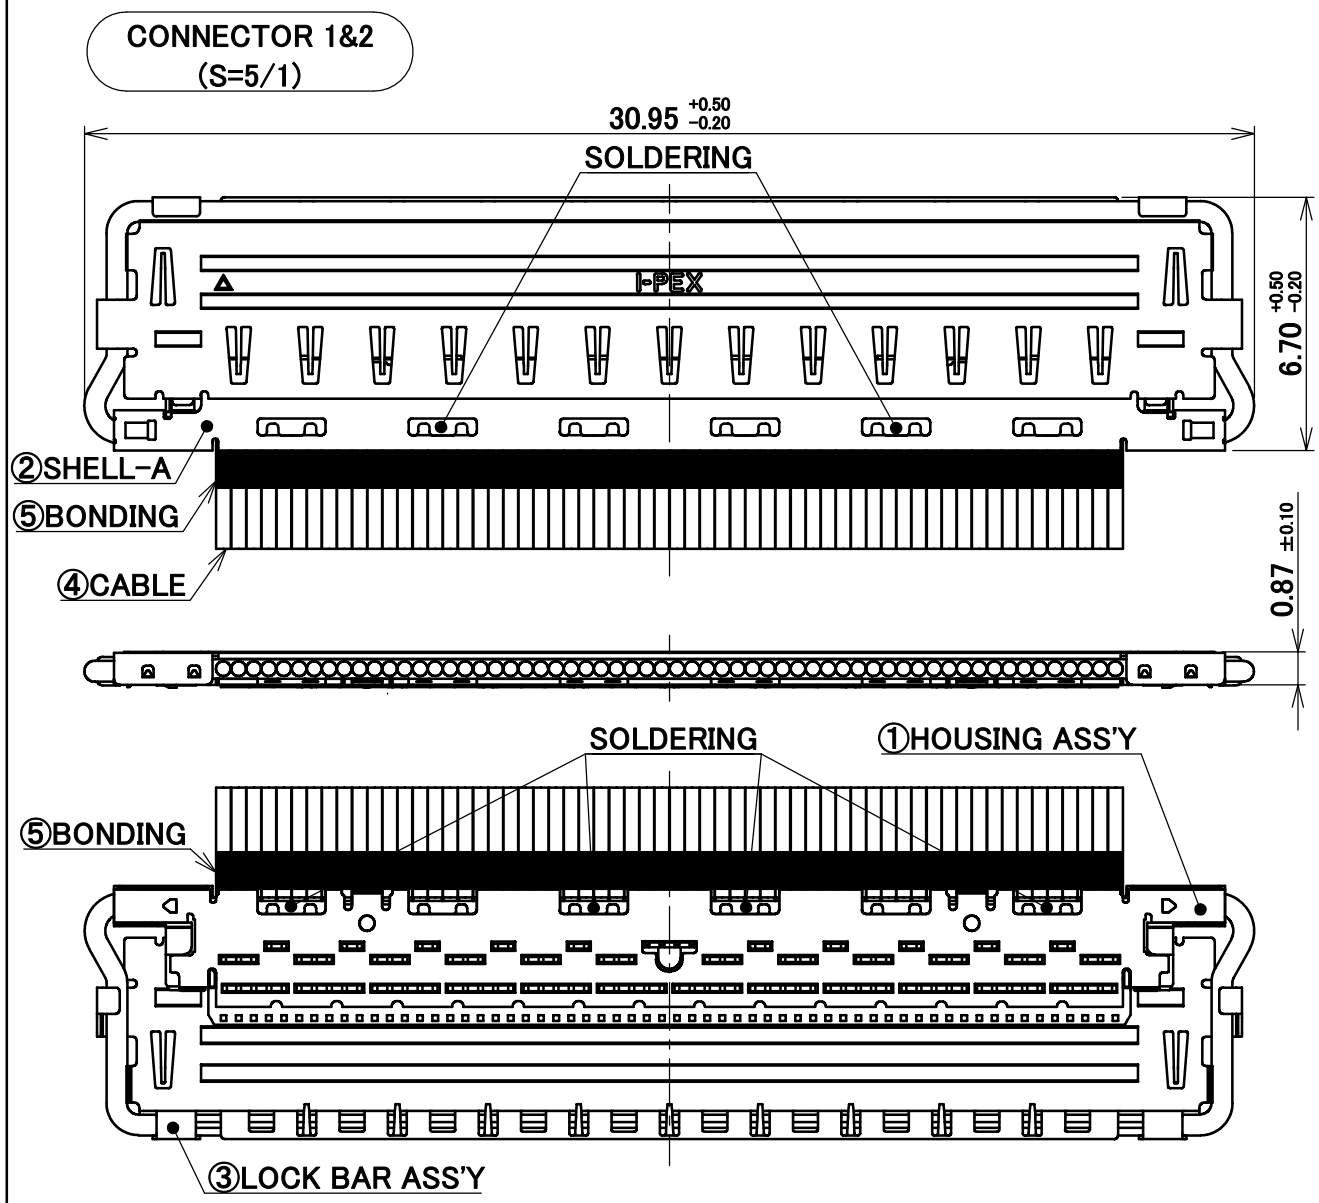


PART No.
81674-100B-02-D

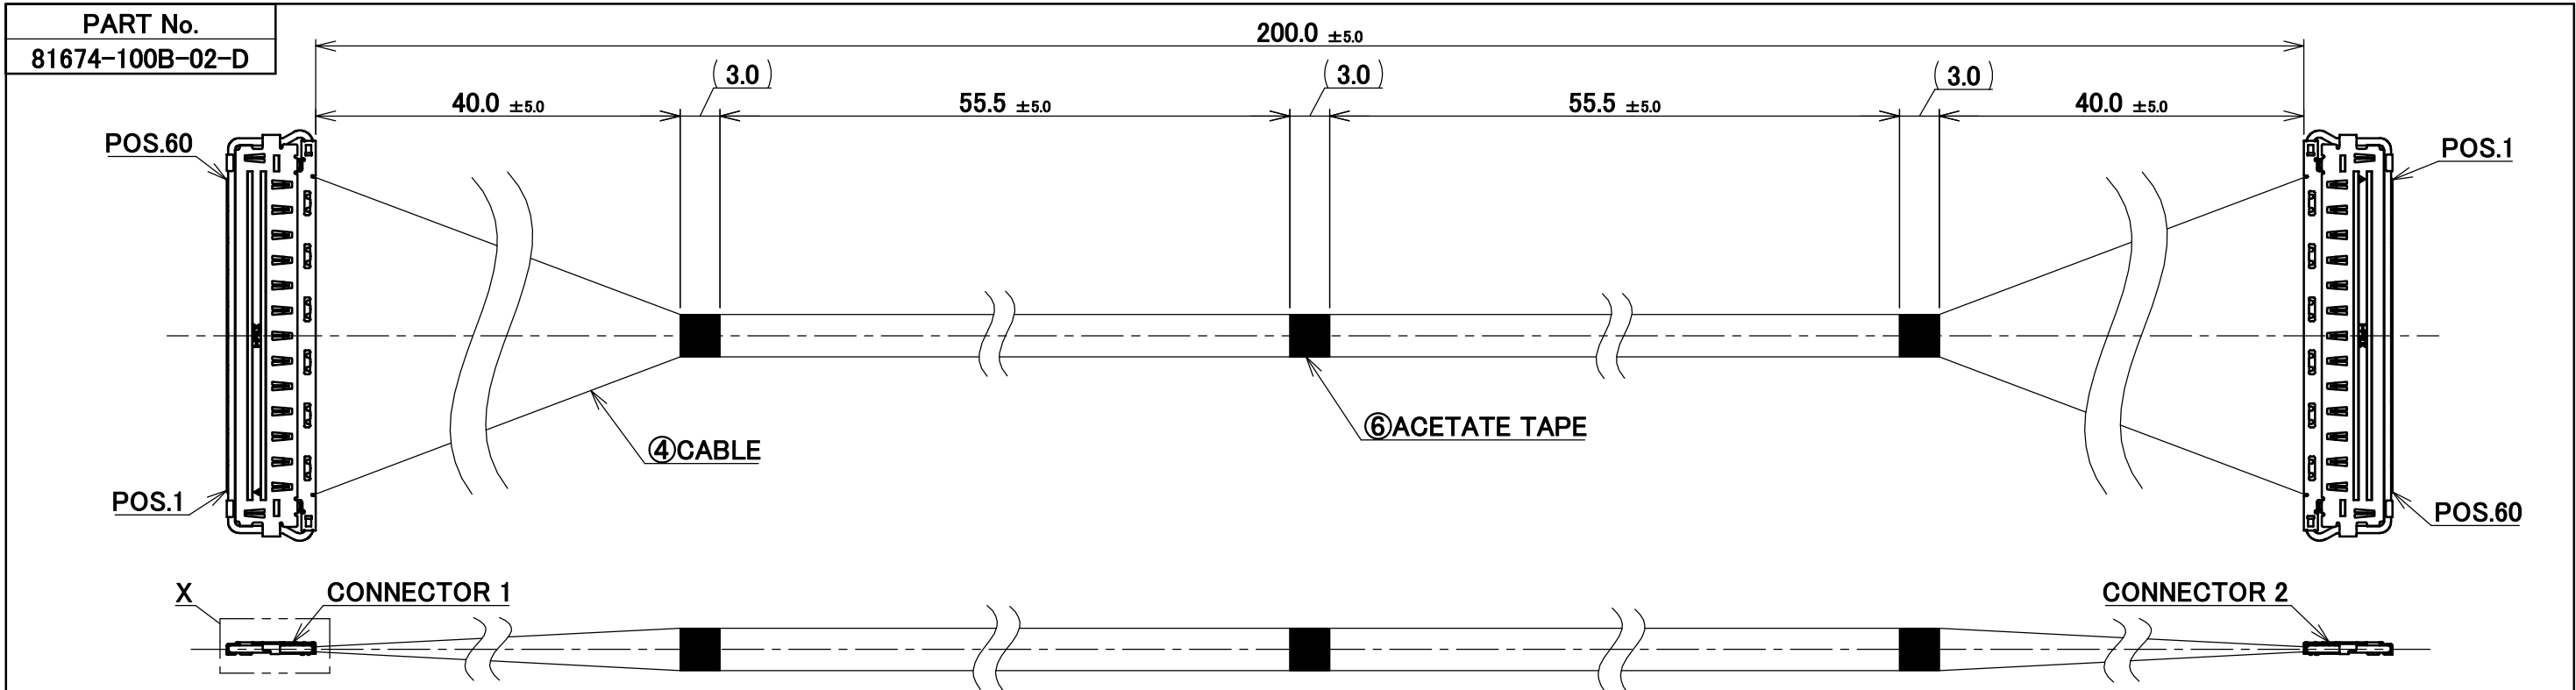

- NOTE.
1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-16028.
 2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
60	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
59	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	59
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	60

NO.	DESCRIPTION	PARTS NO.	QTY	REMARK
6	ACETATE TAPE	-	3	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	60	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	LOCK BAR ASS'Y	20789-060T-01	2	CONNECTOR 1 & 2 CABLINE-CA II PLUS PLUG P/N : 20788-060T-01 CONNECTOR TO BE MATED : 20790-060E-02
2	SHELL-A	3204-0601	2	
1	HOUSING ASS'Y	20680-060T-01	2	

REVISION RECORD				GENERAL TOLERANCE.			PROJECTION		SERIES No.		CUSTOMER COPY	
0	Z231133	R.T	Sept./20/'23	ANGLE	±2°	6 OVER 30 MAX.	±0.3		IH-200016	TITLE		
REV.	ECN	BY	DATE	APP.	6 MAX.	±0.2	30 OVER 120 MAX.			±0.5	CABLINE®-CA II PLUS 60P HARNESS	
				DWG. R.Takei			DATE 2023/09/20		SCALE		I-PEX	
				CHK. -					2:1			
				APP. H.Ikari			DWG. No. 81674		UNIT		mm	
									SIZE			
									SHEET		1/1	
									REV.			
											0	

Confidential C

I-PEX Inc.

QKE-DFE06-02 REV.12