

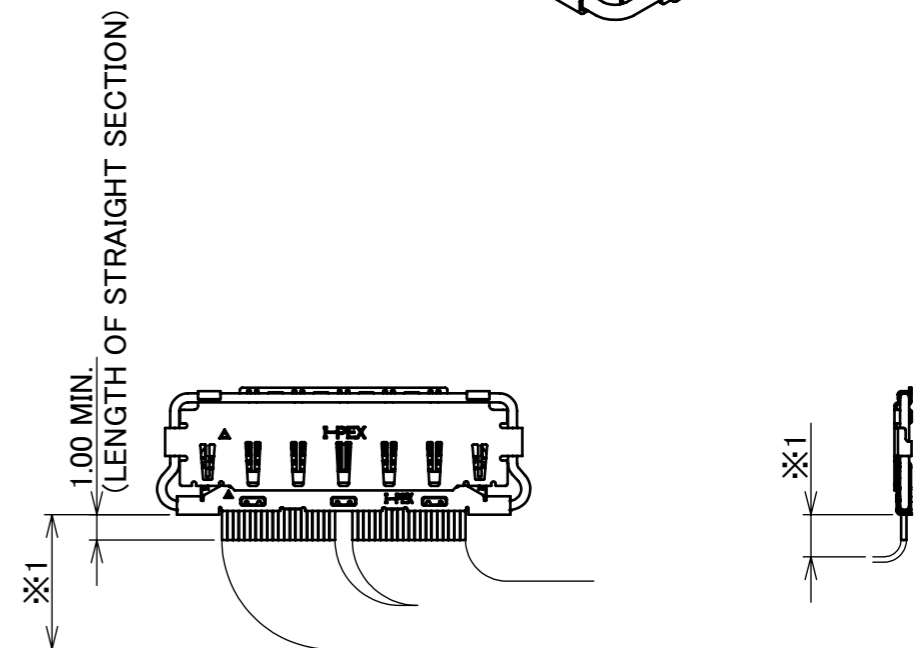
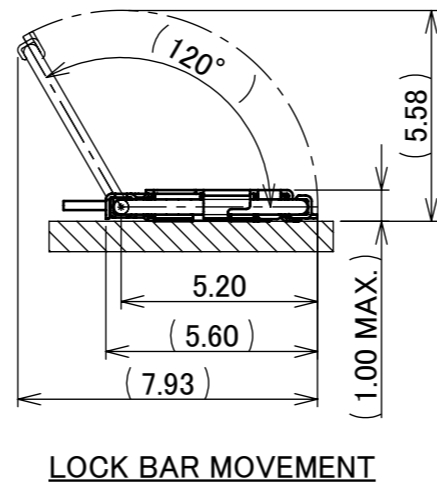




PART NO.	Pos.
20977-040T-01	40

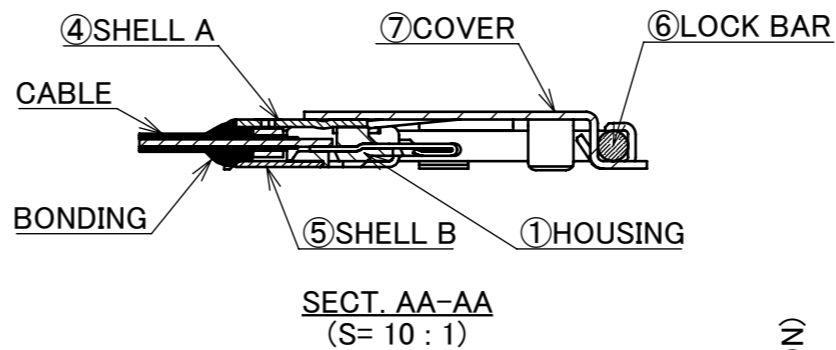

**BOTTOM VIEW**

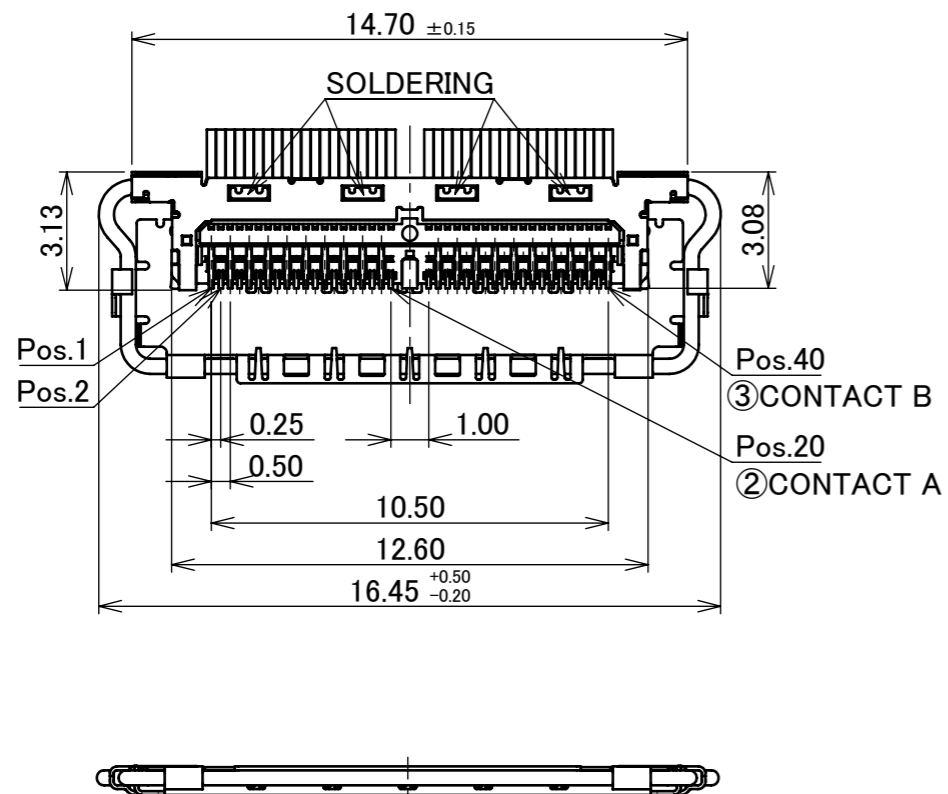

**TOP VIEW**

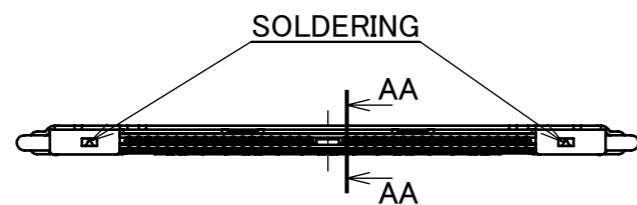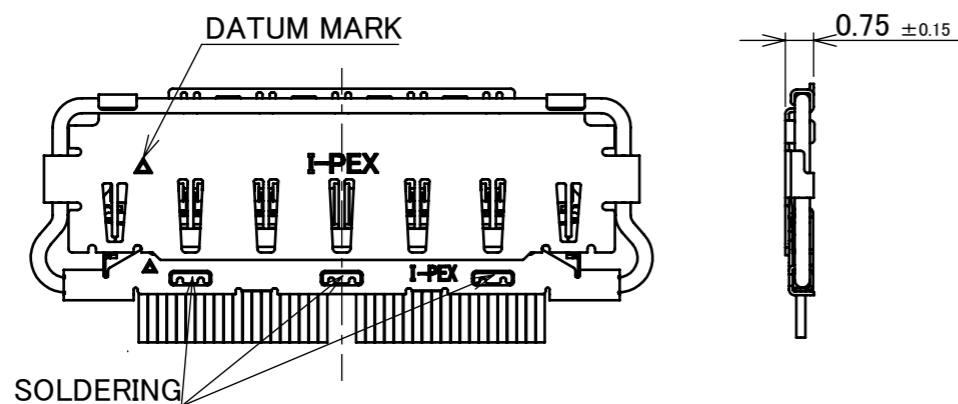




※1 : THE BEND DIMENSIONS MAY VARY BASED ON THE SIZE AND QUANTITY OF CABLES. PLEASE CONFIRM THE MINIMUM BENDING RADIUS WITH I-PEX OR THE HARNESS MANUFACTURER.

NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
7	COVER	PHOSPHOR BRONZE	ALL OVER Ni 1.00 μ m MIN.
6	LOCK BAR	SUS	-
5	SHELL B	SUS	PARTIAL Au 0.003 μ m MIN. OVER Ni 1.00 μ m MIN.
4	SHELL A	SUS	PARTIAL Au 0.003 μ m MIN. OVER Ni 1.00 μ m MIN.
3	CONTACT B	CORSON ALLOY	CONTACT AREA : Au 0.25 μ m MIN. OVER Ni 2.00 μ m MIN. SOLDERING AREA : Au 0.03 μ m MIN. OVER Ni 1.00 μ m MIN.
2	CONTACT A	CORSON ALLOY	CONTACT AREA : Au 0.25 μ m MIN. OVER Ni 2.00 μ m MIN. SOLDERING AREA : Au 0.03 μ m MIN. OVER Ni 1.00 μ m MIN.
1	HOUSING	LCP	UL94V-0, BLACK

REV.	ECN	BY	DATE	APP.	ANGLE	PROJECTION	SERIES No.	CUSTOMER COPY
					±2° 6 OVER 30 MAX. ±0.3 6 MAX. ±0.2 30 OVER 120 MAX. ±0.5	⊕	R1/R0/R0	
3	Z241433	T.T	2024/10/16	H.I	GENERAL TOLERANCE.		TITLE CABLINE® -CX II PLUG WITH COVER CABLE ASSEMBLY	SCALE
2	Z240027	R.H	2024/01/10	H.I	DWG. S.Yamaguchi	DATE 2019/08/08		5:1
1	Z230096	R.H	2023/01/24	H.I	CHK. T.Kurachi			UNIT
0	Z191044	S.Y	2019/08/08		APP. Y.Shimada			mm
REVISION RECORD						DWG. No. 20977		SIZE SHEET REV.
								A3 1/3 3

ITEMS	SPECIFICATION
APPLICABLE CABLE	MICRO-COAXIAL CABLE : AWG# 46,44,39 DISCRETE WIRE : AWG# 39
RATING VOLTAGE	100V AC (PER CONTACT PIN) ※THIS IS THE RATED VOLTAGE OF THE CONNECTOR. PLEASE NOTE THAT THE RATED VOLTAGE MAY VARY IN THE HARNESS DEPENDING ON THE CABLES USED.
RATING AMPERAGE (FOR CONTACT)	0.10A AC/DC [AWG#46] PER CONTACT PIN/UP TO 40 CONTACTS 0.15A AC/DC [AWG#44] PER CONTACT PIN/UP TO 40 CONTACTS 0.50A AC/DC [AWG#39] PER CONTACT PIN/UP TO 8 CONTACTS ※TESTING BY A REAL MACHINE IS RECOMMENDED BECAUSE TEMPERTURE RISE MAY AFFECTED BY ACTUAL SITUATION
OPERATING TEMPERATURE	233~358K(-40°C~+85°C) (CONTAINING TEMPERATURE RISE BY CURRENT)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
CONTACT RESISTANCE	INITIAL : 388mohm MAX.(AWG#39) / AFTER TEST : $\triangle$ 40mohm MAX. INITIAL : 1,080mohm MAX.(AWG#44) INITIAL : 1,830mohm MAX.(AWG#46)
GROUND SHELL RESISTANCE	INITIAL : 50mohm MAX. / AFTER TEST : $\triangle$ 40mohm MAX.
INSULATION RESISTANCE	INITIAL : 1,000Mohm MIN. / AFTER TEST : 500Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	20 CYCLES
MATING FORCE (INITIAL / 20 CYCLES)	40P : 30.0N MAX.
UNMATING FORCE (INITIAL / 20 CYCLES)	40P : 4.0N MIN.
CABLE RETENTION FORCE	40P : 19.60N MIN.
PRODUCT SPECIFICATION	PRS-2403
TEST REPORT	TR-17063
INSTRUCTION MANUAL	HIM-17035
ASSEMBLY MANUAL	ASM-17008
APPEARANCE CRITERIA No.	QLS-A***

ANGLE	$\pm 2^\circ$	6 OVER 30 MAX.	$\pm 0.3$	PROJECTION 	SERIES No. R1/R0/R0	CUSTOMER COPY			
	6 MAX.	$\pm 0.2$	30 OVER 120 MAX.			$\pm 0.5$	SCALE -	<b>I-PEX</b>	
GENERAL TOLERANCE.				TITLE	UNIT				
DWG.	DATE			CABLIN <sup>®</sup> -CX II PLUG WITH COVER CABLE ASSEMBLY		mm			
CHK.				DWG. No.	20977	SIZE A3	SHEET 2/3	REV. 3	
APP.									

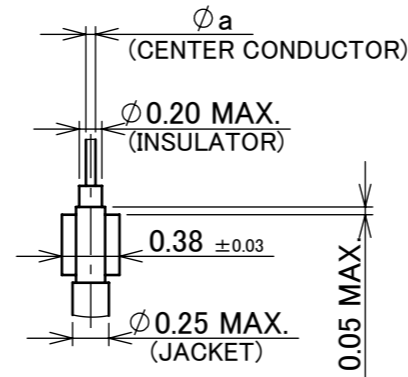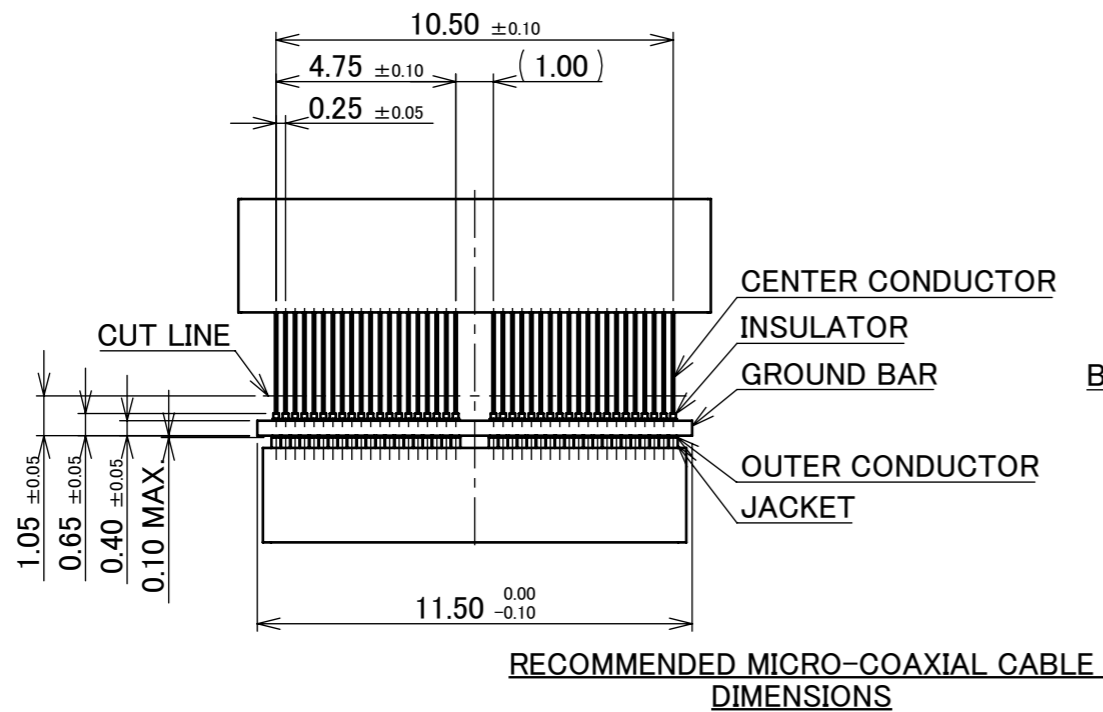

**DETAIL BB**  
(S= 20 : 1)

**CHARACTERISTIC IMPEDANCE MATCHING MICRO-COAXIAL CABLE**

	a
#44	0.063
#46	0.048




**CHARACTERISTIC IMPEDANCE UN-MATCHING MICRO-COAXIAL CABLE**

	a
#39	0.102

MICRO-COAXIAL CABLE #39 : NOT RECOMMENDED  
FOR HIGH SPEED SIGNAL TRANSFER

**DISCRETE WIRE DIMENSION**

	b
#39	0.102

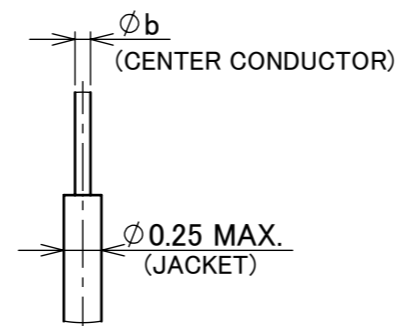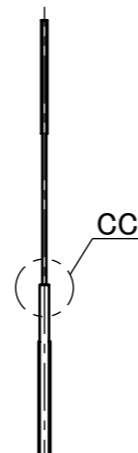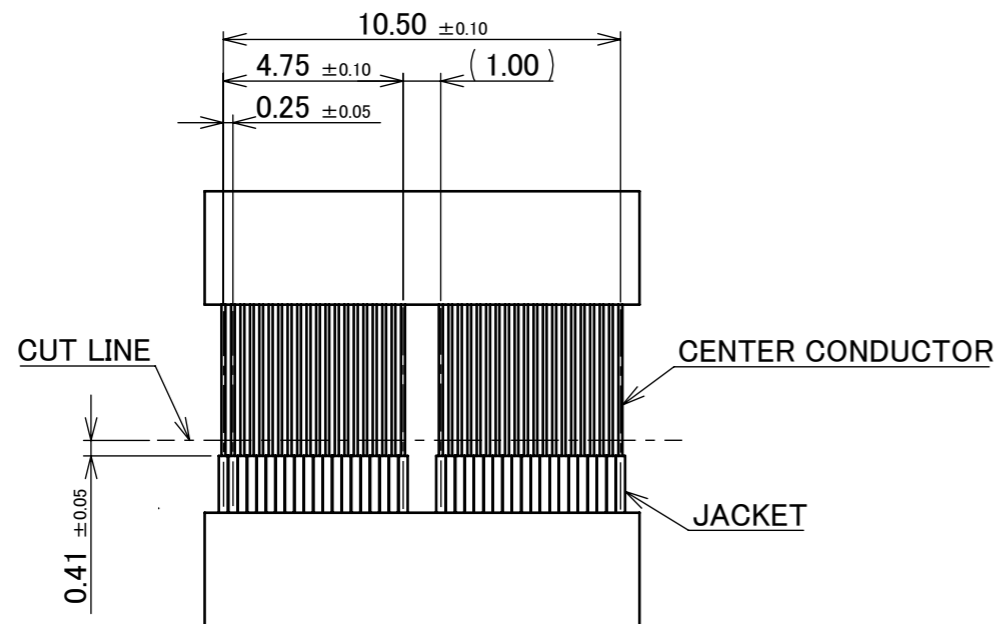

**DETAIL CC**  
(S= 20 : 1)

ANGLE	$\pm 2^\circ$	6 OVER 30 MAX.	$\pm 0.3$	PROJECTION 	SERIES No. R1/R0/R0	CUSTOMER COPY			
6 MAX.	$\pm 0.2$	30 OVER 120 MAX.	$\pm 0.5$						
GENERAL TOLERANCE.				TITLE CABLIN <sup>®</sup> -CX II PLUG WITH COVER CABLE ASSEMBLY	SCALE	<b>I-PEX</b>			
DWG.	DATE				5:1				
CHK.					UNIT				mm
APP.					SIZE				SHEET
				DWG. No.	20977	A3	3/3	3	