


PART No.	Pos.	A	B	C	D	E	TEST BOARD No.	CONNECTOR P/N
91782-026B	26	30.50	27.00	12.00	2.00	1.00	TB-286	20498-026E-41
91782-032B	32	40.00	33.00	15.00	2.00	1.00	TB-307	20498-032E-41
91782-040B	40	44.50	41.00	19.00	2.00	1.00	TB-262	20498-040E-41
91782-050B	50	45.00	40.80	19.20	1.60	0.80	TB-324	20498-050E-41

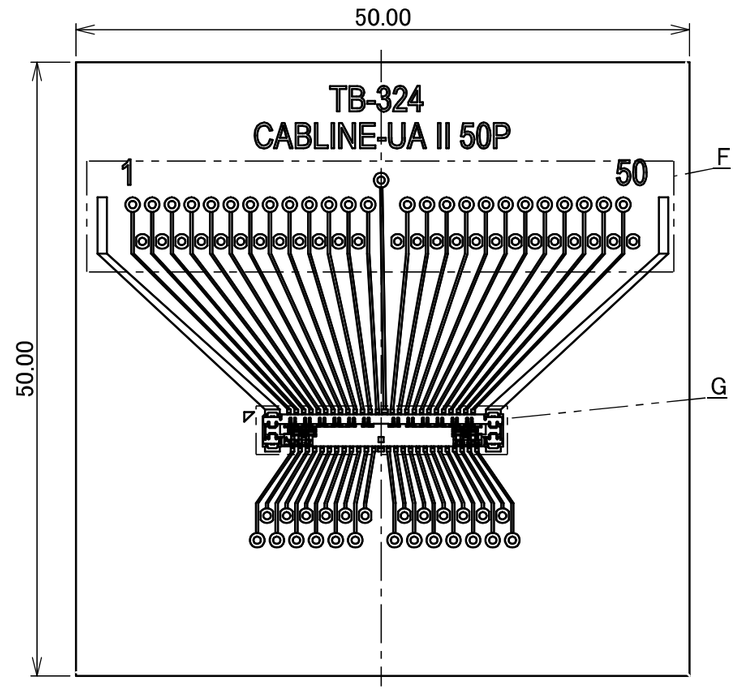


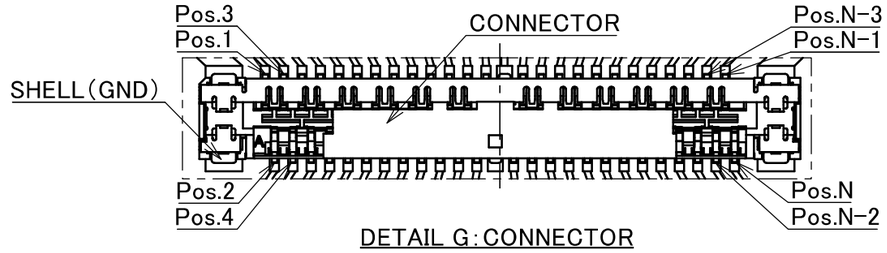

DETAIL G:CONNECTOR
(S= 5 : 1)

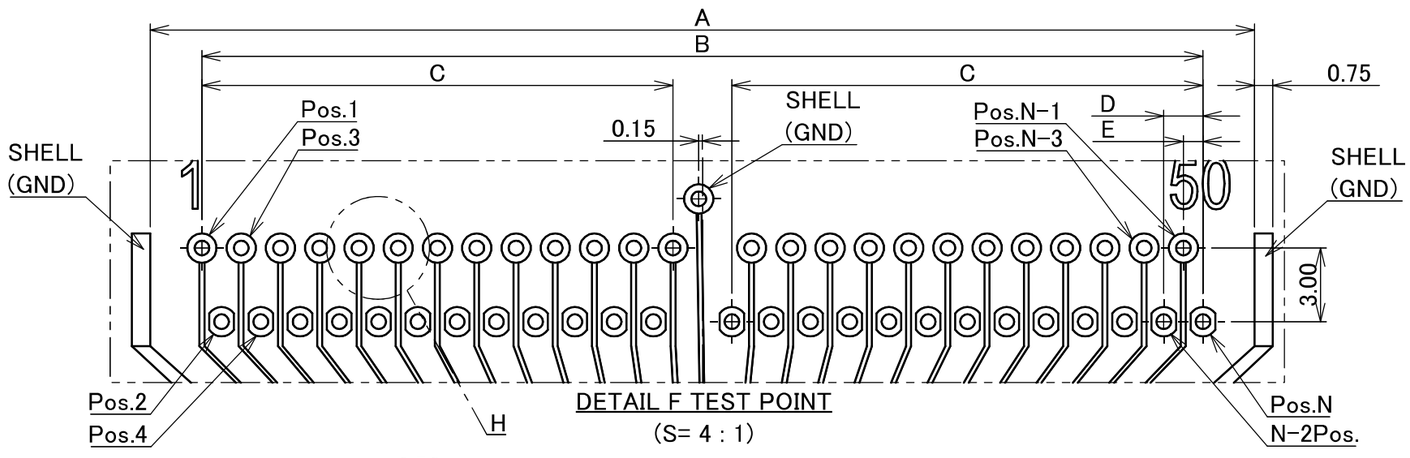


DETAIL F TEST POINT
(S= 4 : 1)

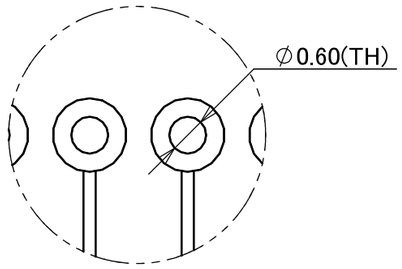

DETAIL H
(S= 10 : 1)

PIN ASSIGNMENT

CONNECTOR POS.	TEST POINT POS.
1	1
2	2
⋮	⋮
N-1	N-1
N	N
SHELL(GND)	SHELL(GND)

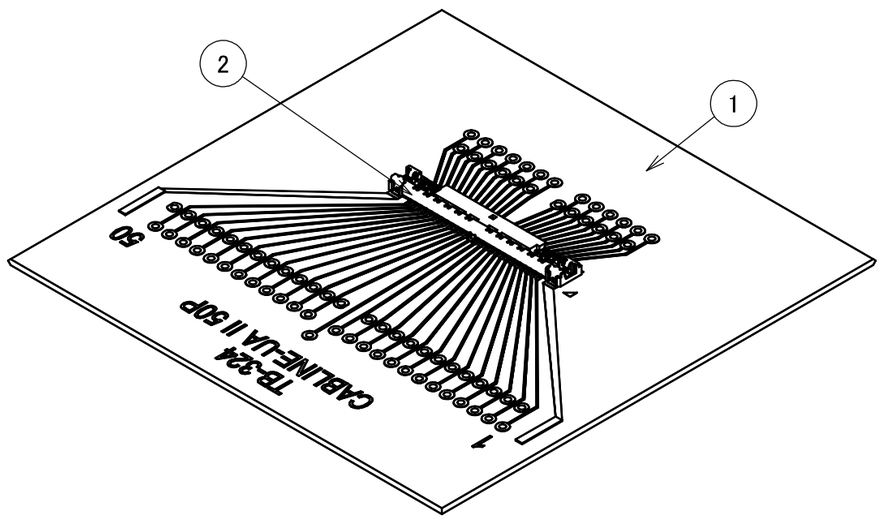

NOTES.
1.APPLICABLE PLUG CONNECTOR: CABLINE-UA II PLUG (P/N: 20496-0**-40)
2.TEST BOARD MATERIAL : FR-4

NO.	DESCRIPTION	PART NO.	QTY	REMARKS
2	CONNECTOR	20498-0**E-41	1	CABLINE-UA II RECEPTACLE ASSEMBLY
1	TEST BOARD	26P : TB-286 32P : TB-307 40P : TB-262 50P : TB-324	1	TEST BOARD THICKNESS: 0.60mm NUMBER OF LAYER : 2 BASE COPPER FOIL THICKNESS : 18 μm

REV.	ECN	BY	DATE	APP.
0	ZC01002	R.H	2026/10/20	–

REVISION RECORD

ANGLE	±2°	6 OVER 30 MAX.	±0.3
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5

GENERAL TOLERANCE.

PROJECTION

SERIES No. R0

CUSTOMER COPY

DWG. R.Hatano DATE 2026/10/20

CHK. T.Tanigawa

APP. T.Masunaga

TITLE
CABLINE®-UA II
CONTINUITY
TEST BOARD ASSEMBLY

DWG. No. 91782

SCALE 2:1

UNIT mm


SIZE A3

SHEET 1/2


REV. 0

I-PEX

PART No.	Pos.	TEST BOARD No.	CONNECTOR P/N
91782-026B	26	TB-286	20498-026E-41
91782-032B	32	TB-307	20498-032E-41
91782-040B	40	TB-262	20498-040E-41
91782-050B	50	TB-324	20498-050E-41




<FRONT>




<BACK>

26P SHAPE
(S = 1 : 1)




<FRONT>




<BACK>

32P SHAPE
(S = 1 : 1)




<FRONT>




<BACK>

40P SHAPE
(S = 1 : 1)




<FRONT>



<BACK>

50P SHAPE
(S = 1 : 1)

<SAMPLE BAG>
REUSABLE PLASTIC BAG

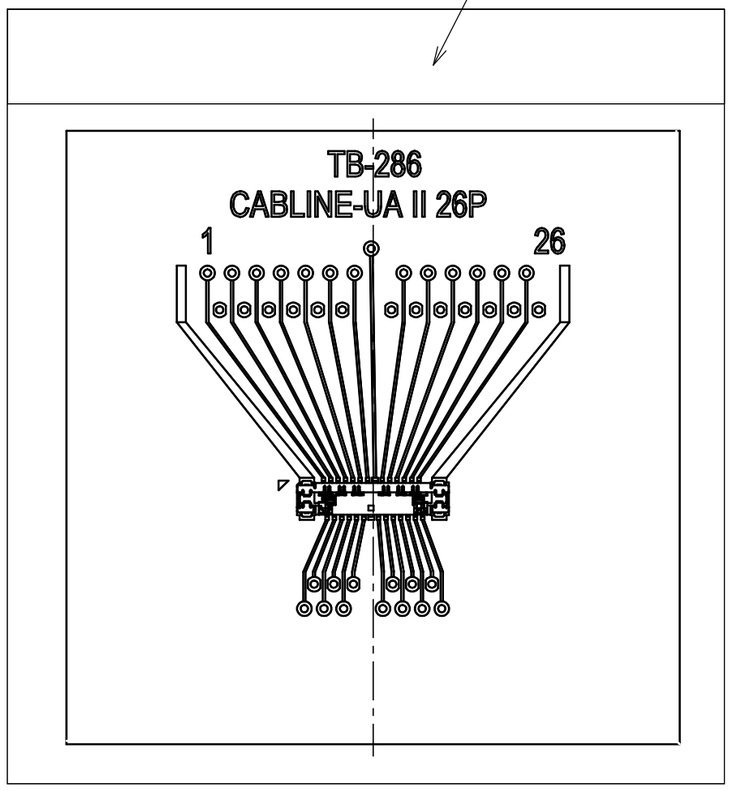

PACKING STYLE

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.	CUSTOMER COPY	
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5		R0		
GENERAL TOLERANCE.				TITLE		SCALE	
DWG.		DATE		CABLINE®-UA II CONTINUITY TEST BOARD ASSEMBLY		2:1	I-PEX
CHK.						UNIT mm	
APP.				DWG. No.		SIZE	SHEET / REV.
				91782		A3	2/2 / 0