

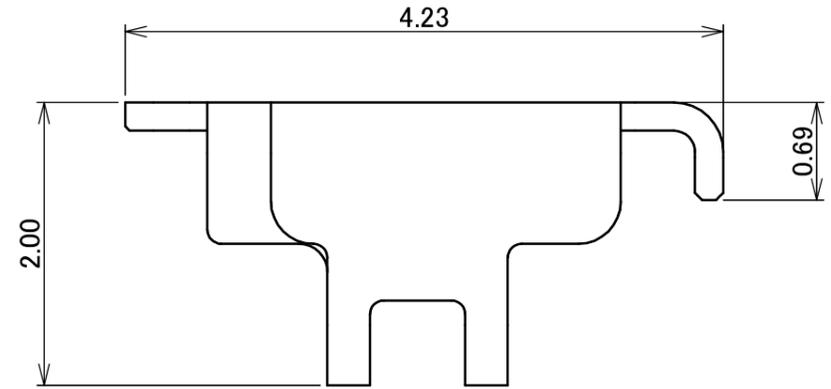

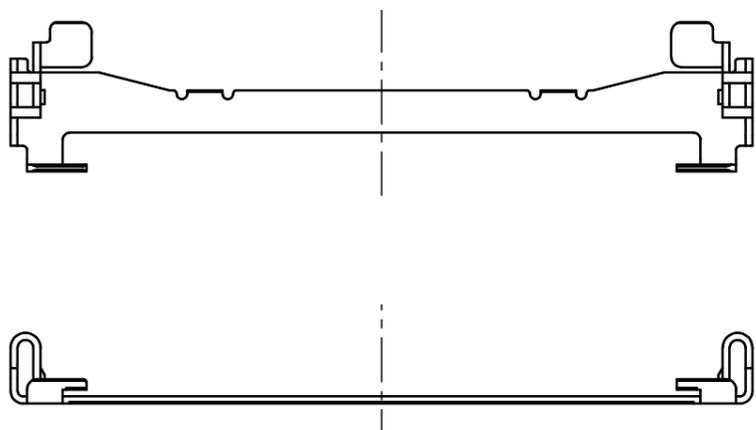
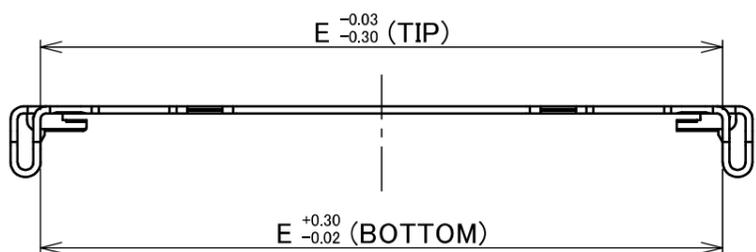


Recommended P/N 3914-0\*\*1

PART NO.	Pos.	A	B	C	D	E
3914-0401	40	21.00	18.05	16.70	16.40	19.30
3914-0701	70	33.00	30.05	28.70	28.40	31.30

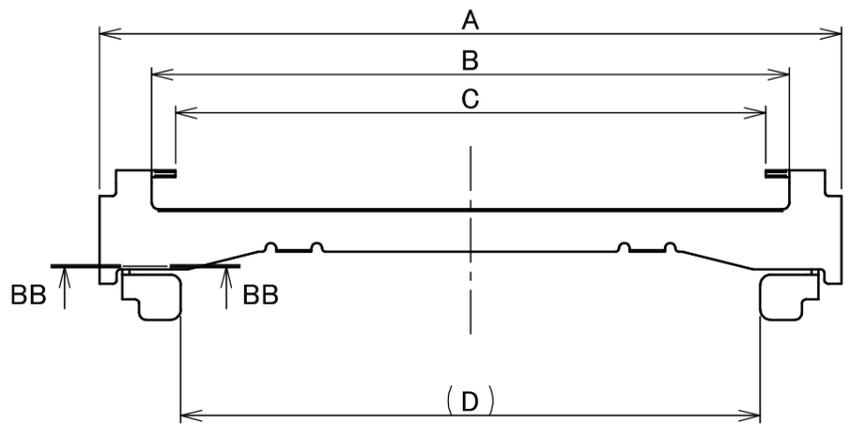

DETAIL AA (S=20/1)

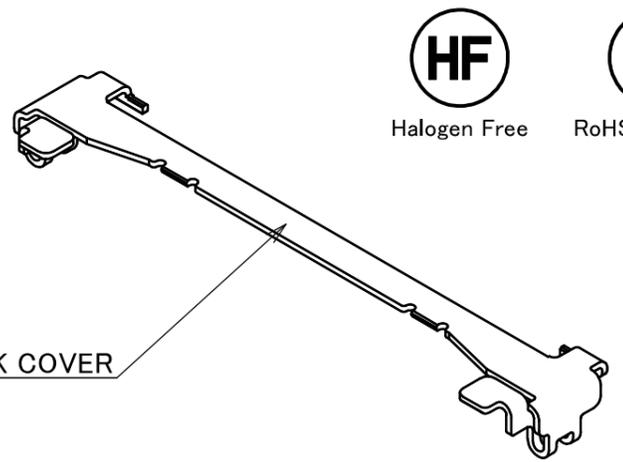

**HF** Halogen Free  
**RoHS** COMPLIANT RoHS Compliant




① LOCK COVER

NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS
1	LOCK COVER	PHOSPHOR BRONZE	ALL OVER Ni 1.00 μ m MIN

REV.	ECN	BY	DATE	APP.	CHK.	APP.	ANGLE	PROJECTION	SERIES No.	TITLE	SCALE	SHEET	REV.
0	ZC00498	T.Ono	2026/02/26	-	M.Nakamura	H.Ikari	±2° 6 OVER 30 MAX. ±0.3 6 MAX. ±0.2 30 OVER 120 MAX. ±0.5	⊕	R0	CABLIN <sup>®</sup> -UMF PLUG LOCK COVER	5:1	1/2	0
REVISION RECORD							GENERAL TOLERANCE.		DWG. No. 3914		SIZE A3		REV. 0

**PATENT PENDING**

PART NO.	Pos.	F	G	PIECES PER REEL (PIECES / REEL)	QTY. PER PACKING CARTON (REELS / CARTON)	PACKING STANDARD
3914-0401	40	45.00	41.00	4000 / REEL	3 / CARTON = 12000	PST-25012
3914-0701	70	55.00	53.00		2 / CARTON = 8000	

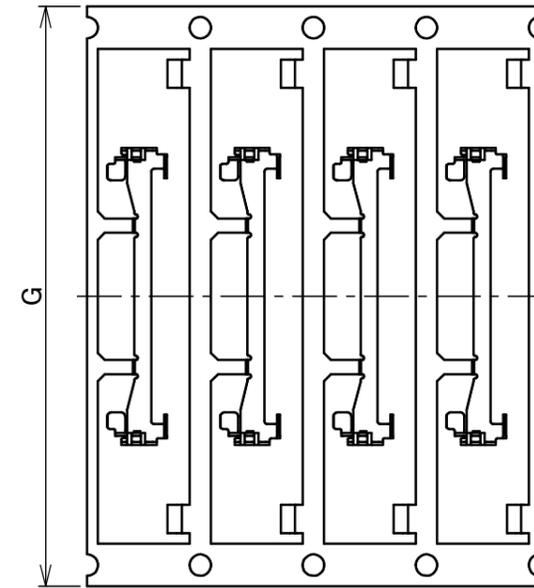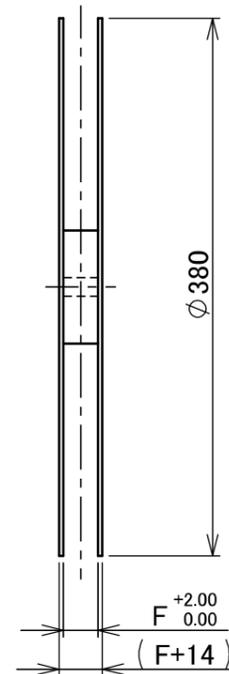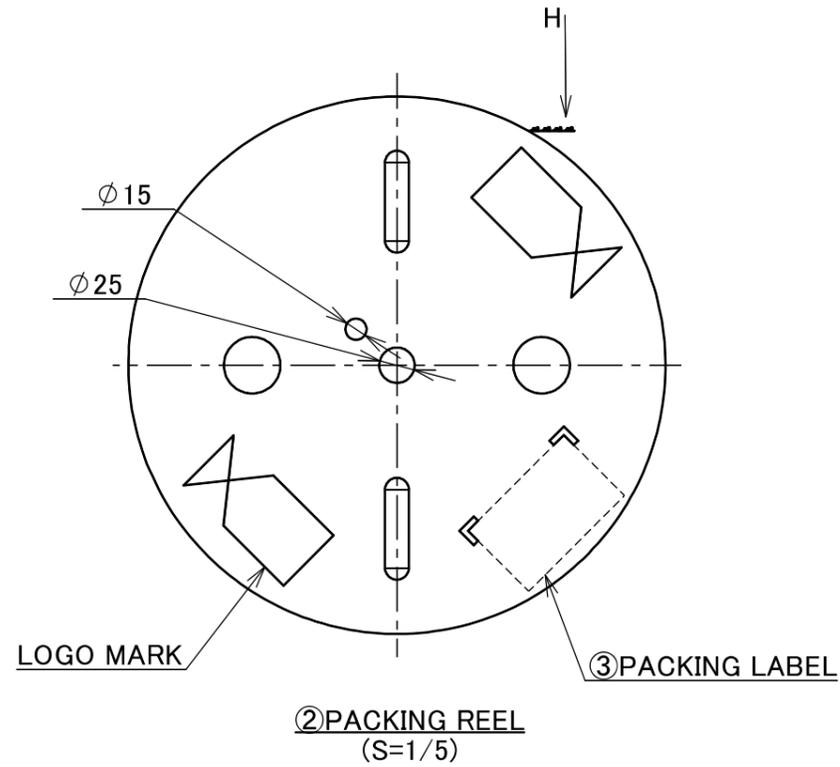

VIEW H  
(S=2:1)

NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS
3	PACKING LABEL	-	-
2	PACKING REEL	CARDBOARD	-

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. R0	CUSTOMER COPY		
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5					
GENERAL TOLERANCE.				TITLE		SCALE	<b>I-PEX</b>	
DWG.	DATE			CABLINÉ® -UMF PLUG LOCK COVER		1:5		
CHK.						UNIT		
APP.				DWG. No.		mm		
				3914		SIZE	SHEET	REV.
						A3	2/2	0