


PART No.	Pos.	A	B	TEST BOARD NO.	CONNECTOR NO.
91783-030B	30	19.50	23.00	TB-470	20533-230E
91783-034B	34	22.10	25.60	TB-344	20533-234E
91783-040B	40	26.00	29.50	TB-336	20533-240E
91783-050B	50	32.50	36.00	TB-332	20533-250E

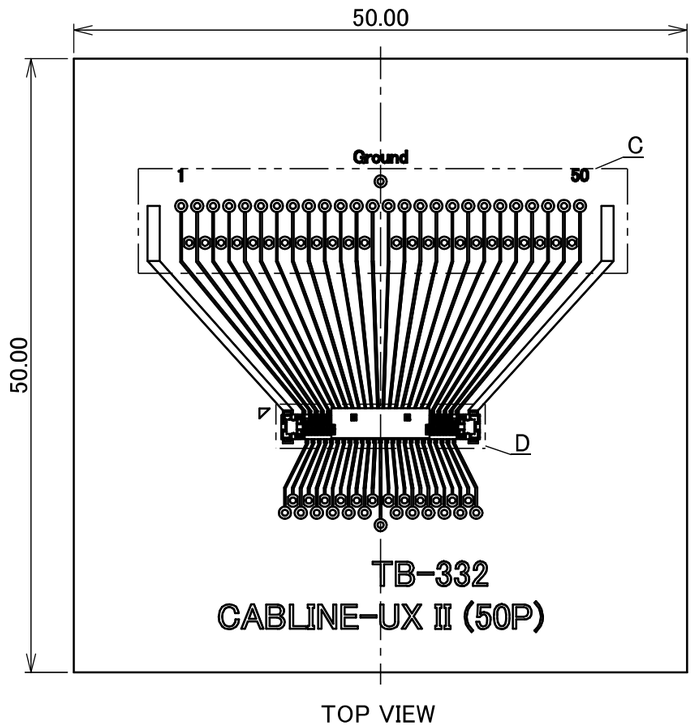


TOP VIEW

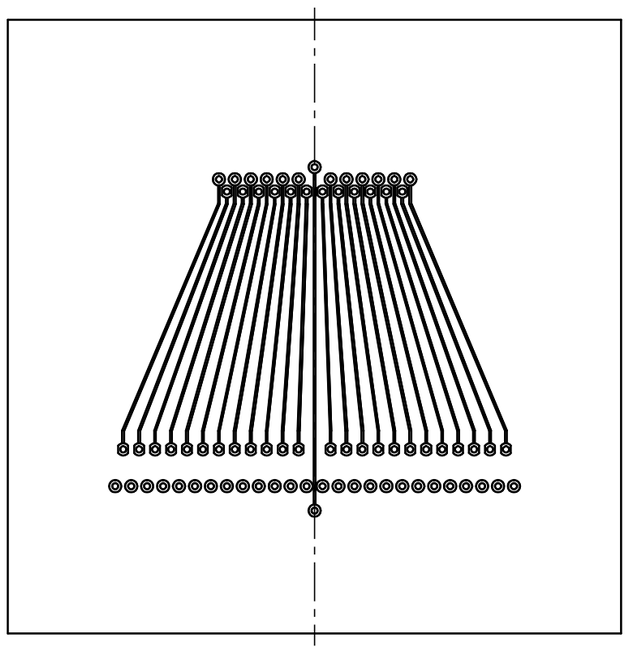


BOTTOM VIEW

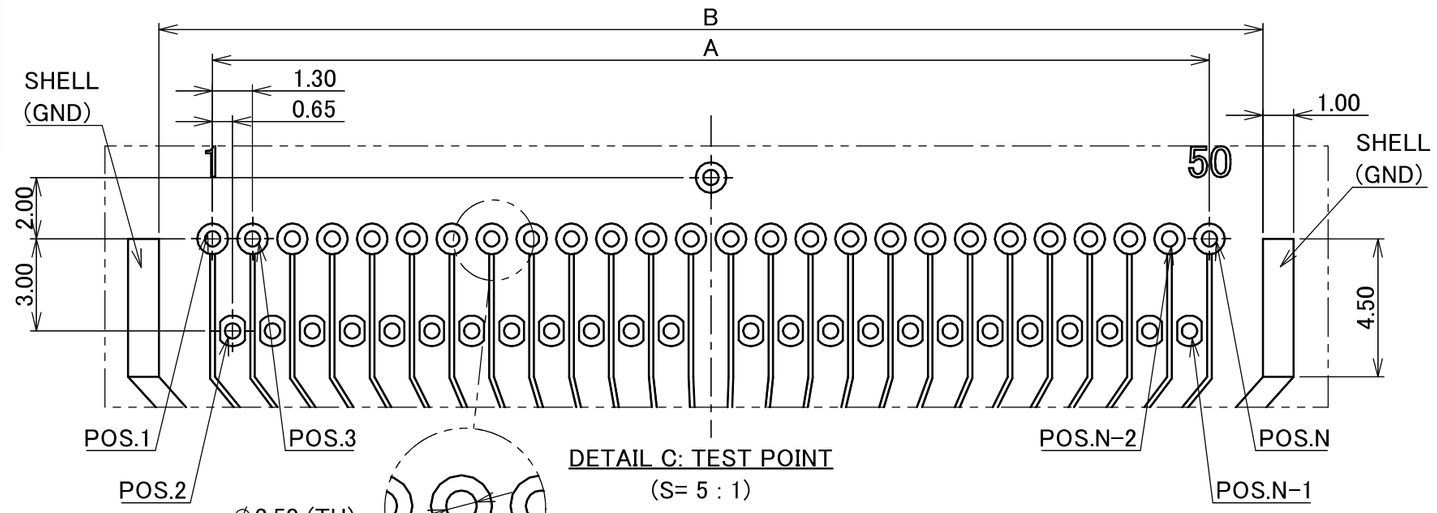

DETAIL C: TEST POINT
(S= 5 : 1)

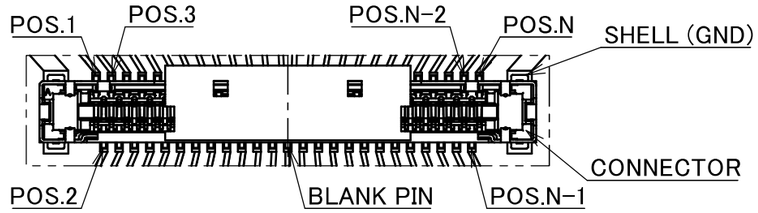

DETAIL D: CONNECTOR
(S= 5 : 1)

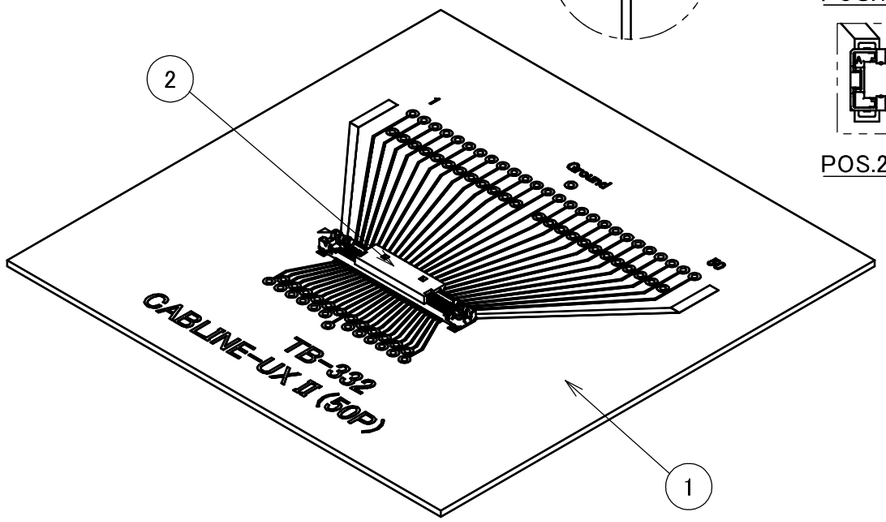

PIN ASSIGNMENT

CONNECTOR POS.	TEST POINT POS.
1	1
2	2
⋮	⋮
N-1	N-1
N	N
SHELL(GND)	SHELL(GND)

NOTES.
1. APPLICABLE PLUG CONNECTOR: CABLINE-UX II PLUG (P/N: 20531-0**T-02-1)
2. TEST BOARD MATERIAL: FR-4

NO.	DESCRIPTION	PART NO.	QTY	REMARKS
2	CONNECTOR	20533-2**E	1	CABLINE-UX II RECEPTACLE
1	TEST BOARD	30P: TB-470 34P: TB-344 40P: TB-336 50P: TB-332	1	TEST BOARD THICKNESS: 0.60mm NUMBER OF LAYER: 2 BASE COPPER FOIL THICKNESS: 18 μm

REV.	ECN	BY	DATE	APP.
0	ZC01005	A.K	2026/10/01	–

REVISION RECORD

ANGLE	±2°	6 OVER 30 MAX.	±0.3
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5

GENERAL TOLERANCE.

PROJECTION

SERIES No.

CUSTOMER COPY

DWG. A.Koyanagi DATE 2026/10/01

CHK. T.Tanigawa

APP. H.Ikari

TITLE
CABLINE®-UX II
CONTINUITY
TEST BOARD ASSEMBLY

DWG. No. 91783

SCALE 2:1

UNIT mm


SIZE A3

SHEET 1/2


REV. 0

I-PEX


PART No.	Pos.	TEST BOARD NO.	CONNECTOR NO.
91783-030B	30	TB-470	20533-230E
91783-034B	34	TB-344	20533-234E
91783-040B	40	TB-336	20533-240E
91783-050B	50	TB-332	20533-250E

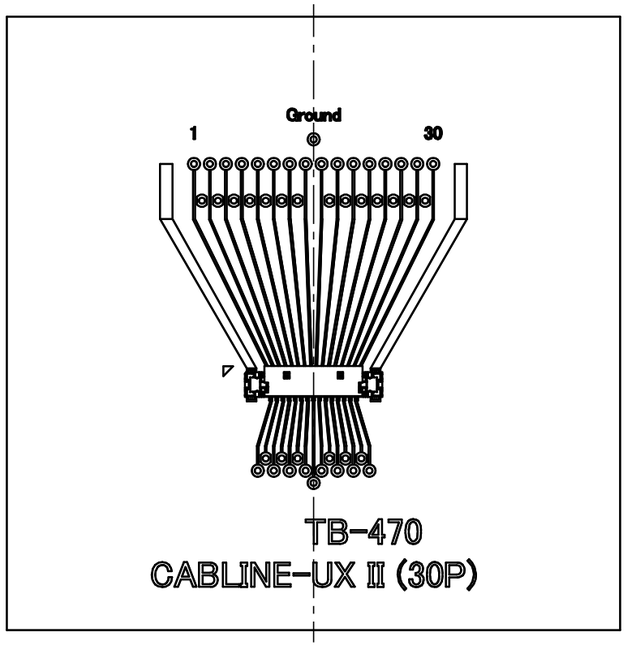


30P SHAPE
(S= 2 : 1)

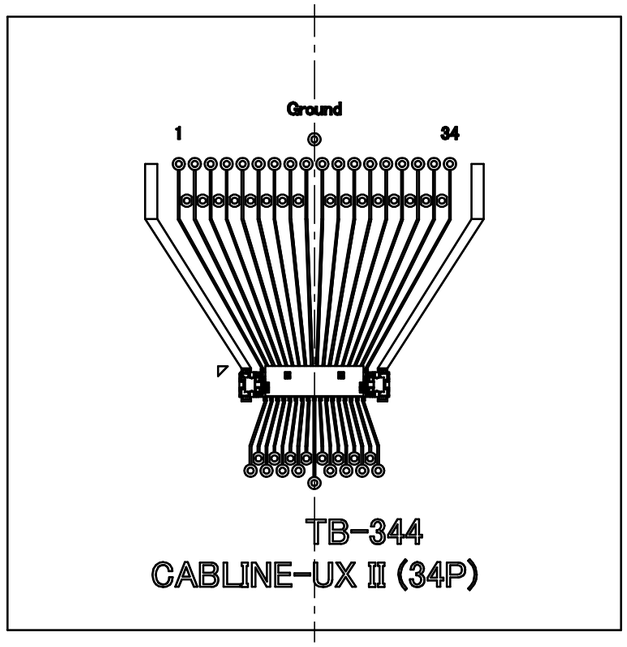


34P SHAPE
(S= 2 : 1)

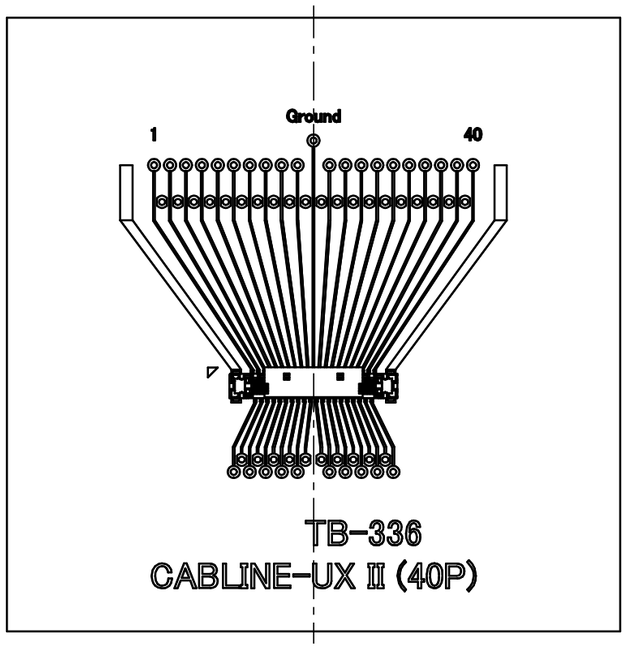

40P SHAPE
(S= 2 : 1)

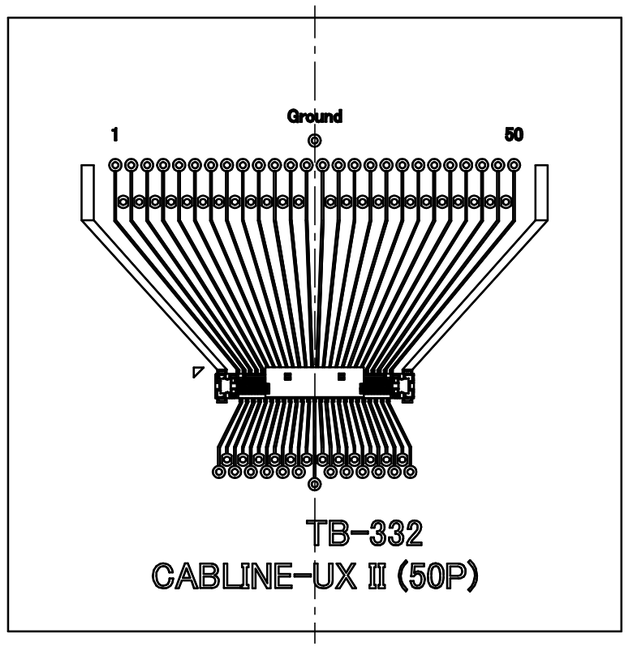

50P SHAPE
(S= 2 : 1)

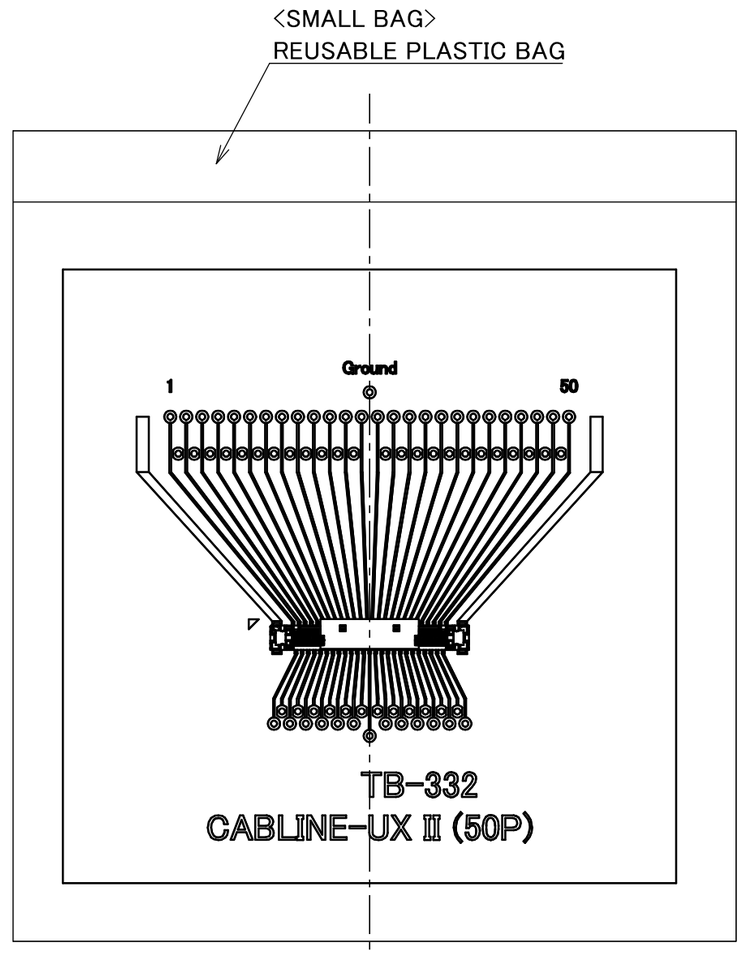

PACKING STYLE

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5		
GENERAL TOLERANCE.				TITLE: CABLINE®-UX II CONTINUITY TEST BOARD ASSEMBLY	
DWG.	DATE				
CHK.					
APP.				DWG. No. 91783	

CUSTOMER COPY

SCALE	UNIT	SIZE	SHEET	REV.
2:1	mm	A3	2/2	0

I-PEX