
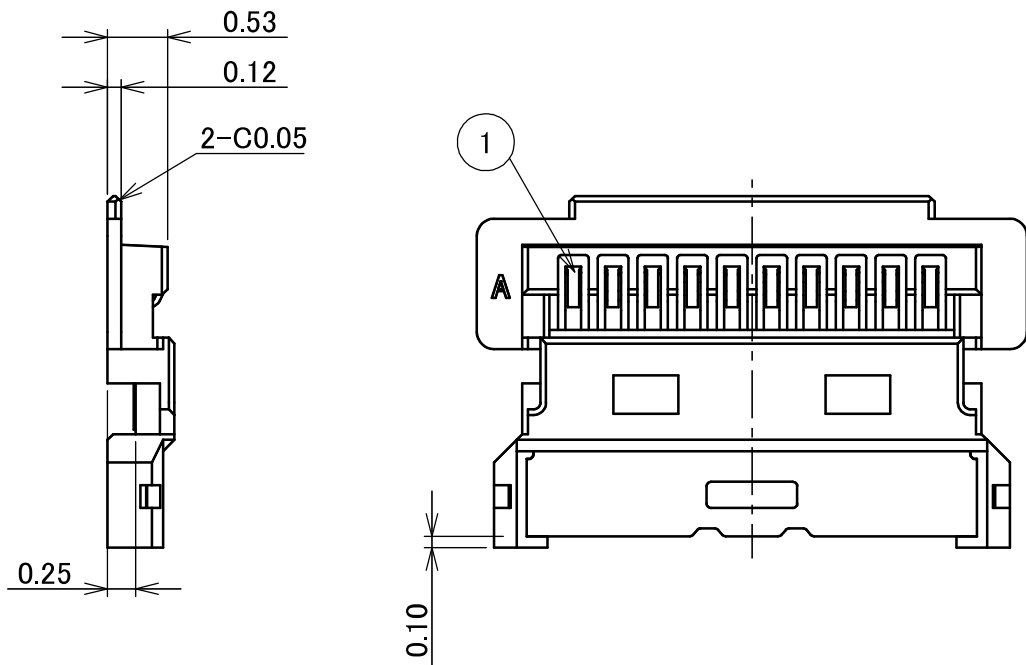
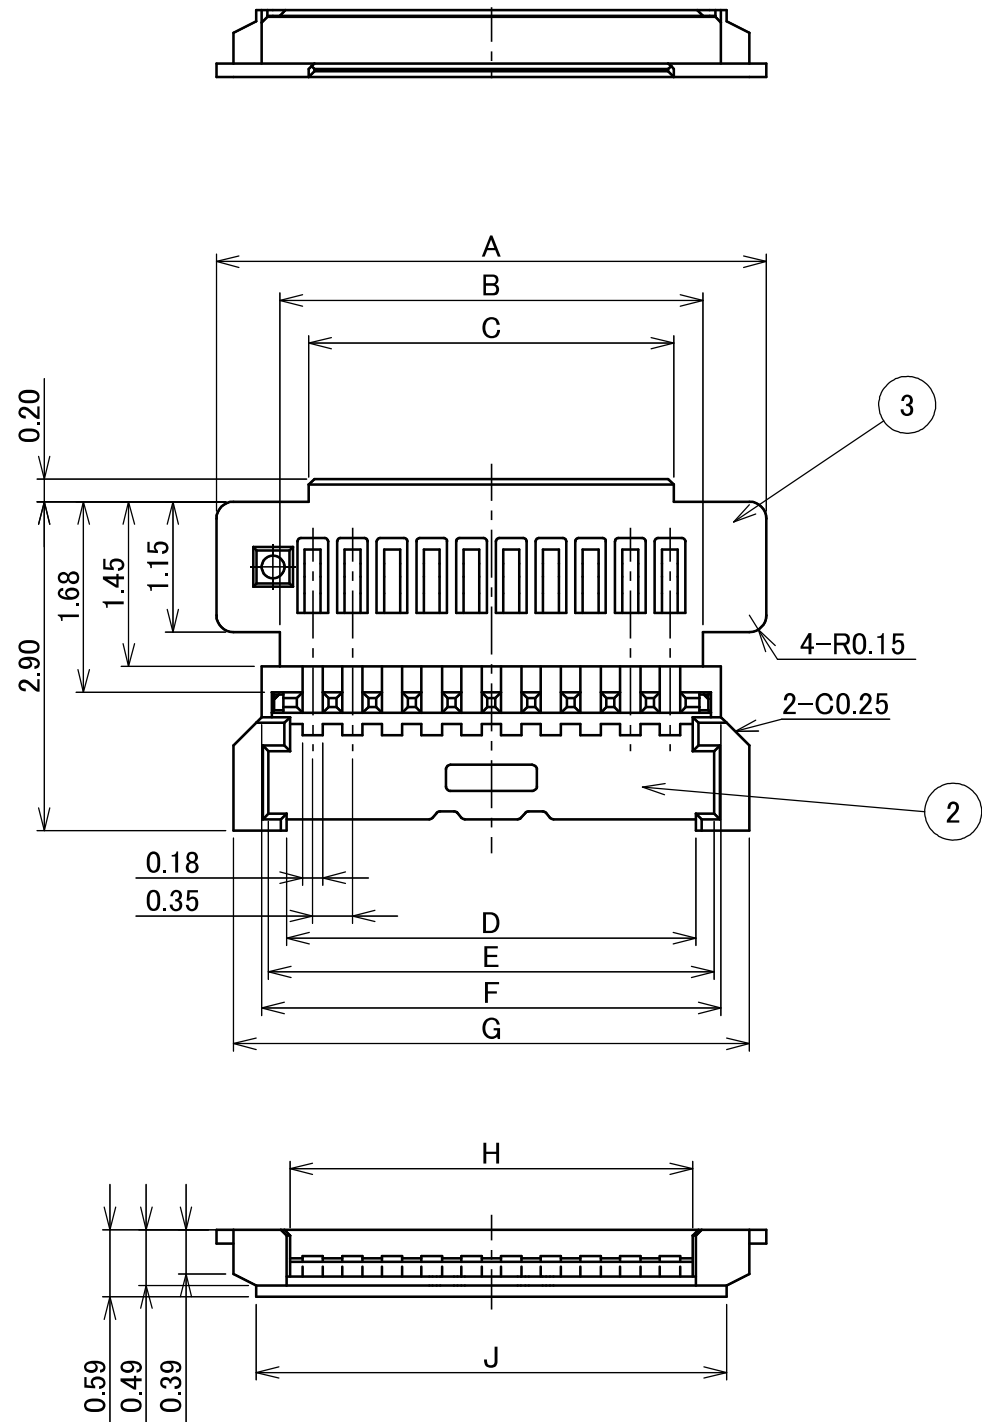
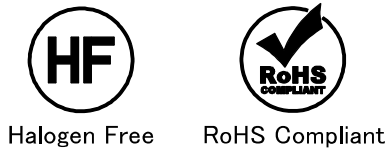



Recommended P/N20907-0**E-01

PART NO.	Pos.	A	B	C	D	E	F	G	H	J
20907-005E-01	5	3.10	1.98	1.47	1.86	2.18	2.30	2.80	1.80	2.40
20907-010E-01	10	4.85	3.73	3.22	3.61	3.93	4.05	4.55	3.55	4.15



3	HOUSING				LCP				UL94V-0, BLACK						
2	SHELL B				SUS				Au 0.02 μ m MIN. OVER Ni 1.00 μ m MIN.						
1	CONTACT				CORSON ALLOY				ALL OVER Ni 1.00 μ m MIN. CONTACT PART Au 0.02 μ m MIN. SOLDERING PART Au 0.02 μ m MIN.						
NO.	DESCRIPTION				MATERIAL				FINISH , REMARKS						
					ANGLE	$\pm 2^{\circ}$	6 OVER 30 MAX.	± 0.3	PROJECTION		SERIES No.		CUSTOMER COPY		
					6 MAX.	± 0.2	30 OVER 120 MAX.	± 0.5			R7				
					GENERAL TOLERANCE.				TITLE				SCALE	I-PEX	
2	ZC00060	R.H	2025/09/01	H.I	DWG.	DATE		CABLINE®-UY PLUG HOUSING ASSEMBLY				5:1			
1	Z200067	Y.F	2020/01/16	Y.S	S.Matsuo		2019/02/27					UNIT			
0	Z190903	Y.F	2019/07/10	-	CHK.	K.Yufu		mm							
REV.	ECN	BY	DATE	APP.	APP.				DWG. No.				SIZE	SHEET	REV.
REVISION RECORD					Y.Hashimoto				20907				A3	1/2	2

DEVICE P/N	REEL P/N	QTY. PER EMBOSS REEL (PIECES / REEL)	QTY. PER PACKING CARTON (REELS / CARTON)
20907-005E-01	950305-102-100	8000 / REEL	9 / CARTON = 72,000
20907-010E-01			

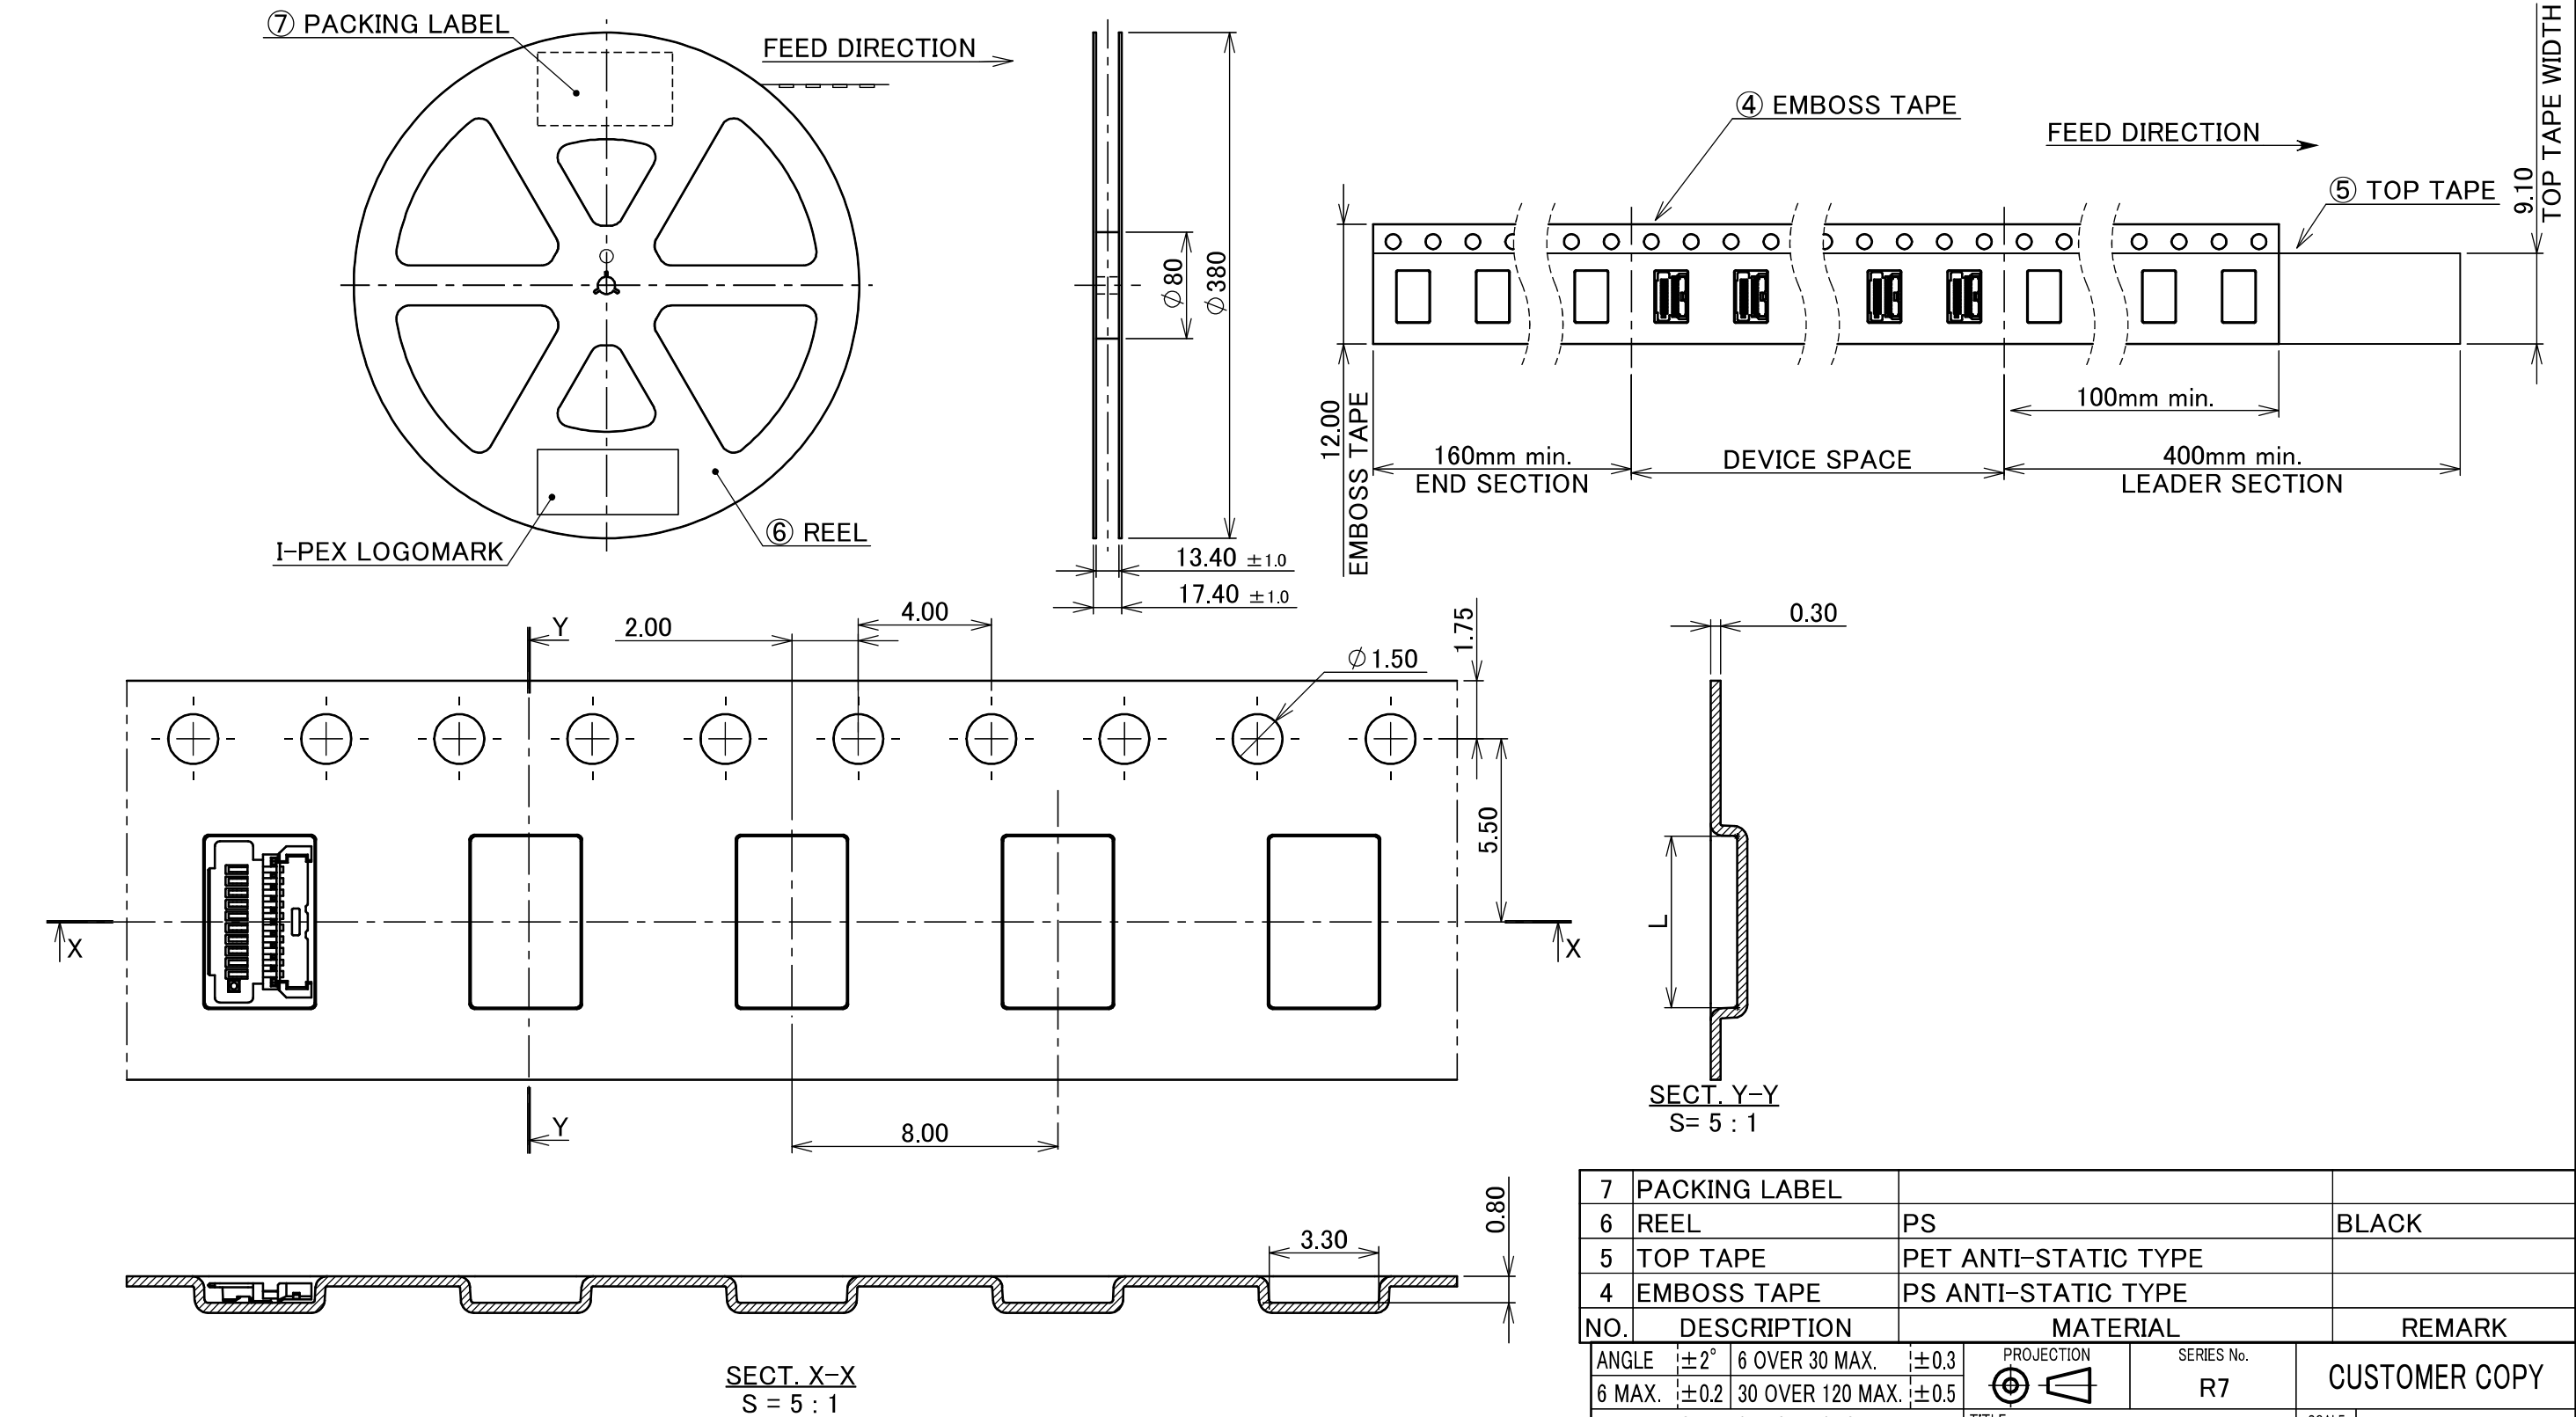

7	PACKING LABEL		
6	REEL	PS	BLACK
5	TOP TAPE	PET ANTI-STATIC TYPE	
4	EMBOSS TAPE	PS ANTI-STATIC TYPE	
NO.	DESCRIPTION	MATERIAL	REMARK
ANGLE	±2°	6 OVER 30 MAX.	±0.3
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5
GENERAL TOLERANCE.		TITLE	CUSTOMER COPY
DWG.	DATE	CABLIN [®] -UY PLUG HOUSING ASSEMBLY	SCALE
CHK.			5:1
APP.			UNIT
		DWG. No.	mm
		20907	I-PEX
			SIZE
			A3
			SHEET
			2/2
			REV.
			2