


PART NO.	Pos.	A	B	C	D	TEST BOARD No.	CONNECTOR P/N
91799-020B	20	50.00	50.00	17.10	38.00	TB-1487	20799-020E-01
91799-030B	30	50.00	50.00	26.10	38.00	TB-1487	20799-030E-01
91799-040B	40	50.00	25.00	35.10	25.70	TB-868	20799-040E-01
91799-050B	50	50.00	25.00	44.10	30.70	TB-868	20799-050E-01
91799-060B	60	75.00	50.00	53.10	54.00	TB-1488	20799-060E-01

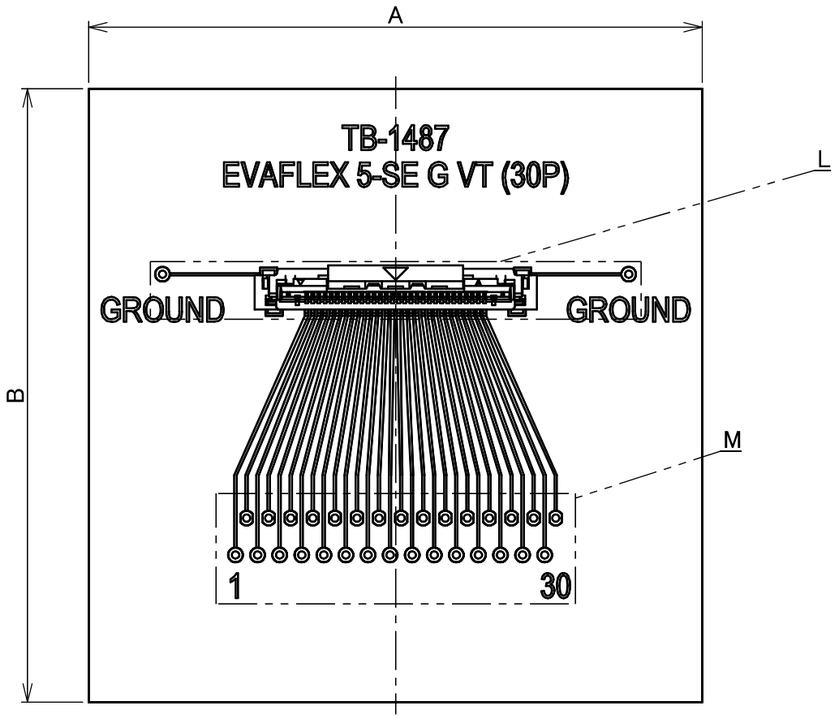


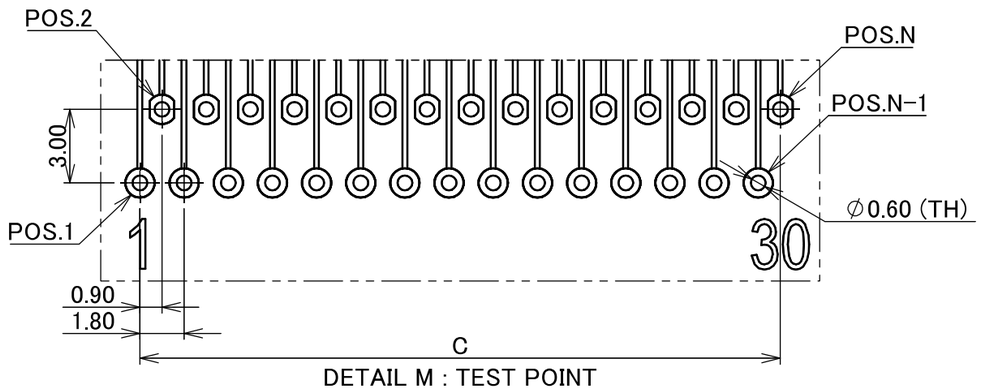

DETAIL M : TEST POINT
S= 4 : 1

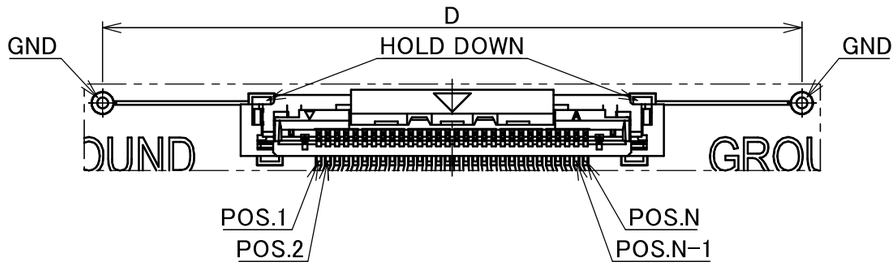


DETAIL L : TB-1487, TB-1488
S= 3 : 1

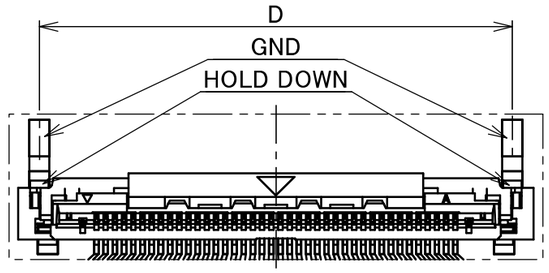

DETAIL L : TB-868
S= 3 : 1

PIN ASSIGNMENT

CONNECTOR POS.	TEST POINT POS.
1	1
2	2
⋮	⋮
N-1	N-1
N	N
HOLD DOWN(GND)	HOLD DOWN(GND)

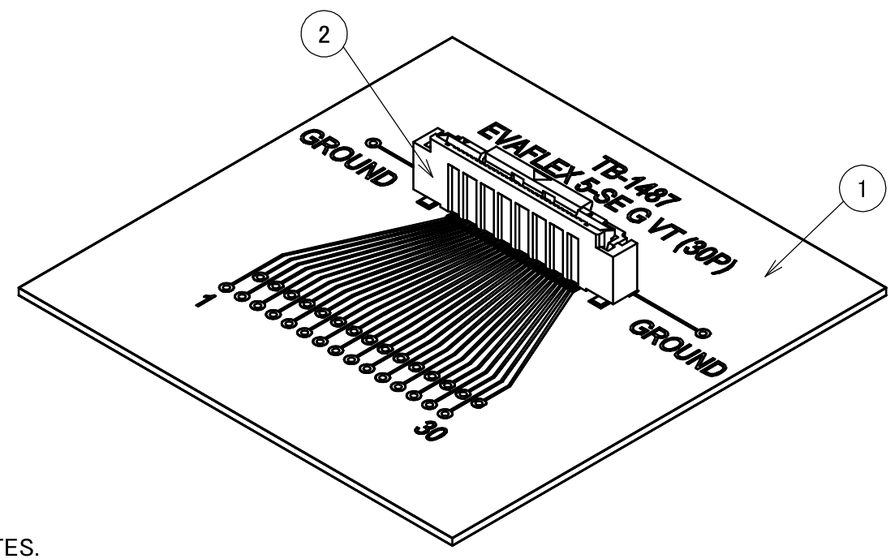

NOTES.
1.TEST BOARD MATERIAL : FR-4

NO.	DESCRIPTION	MATERIAL	QTY	REMARKS
2	CONNECTOR	20799-0**E-01	1	EVAFLEX 5-SE G VT
1	TEST BOARD	20P, 30P : TB-1487 40P, 50P : TB-868 60P : TB-1488	1	TEST BOARD THICKNESS : 0.80mm NUMBER OF LAYER : 2 BASE COPPER FOIL THICKNESS : 18 μm

REV.	ECN	BY	DATE	APP.
0	ZC01081	M.M	2026/10/21	–

REVISION RECORD

GENERAL TOLERANCE			
ANGLE	±2°	6 OVER 30 MAX.	±0.3
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5


PROJECTION | SERIES No. R0 | CUSTOMER COPY

DWG. M.Muro DATE 2026/10/21
CHK. –
APP. H.Ikari


TITLE: EVAFLEX® 5-SE G VT CONTINUITY TEST BOARD ASSEMBLY
DWG. No. 91799
SCALE 2:1 | UNIT mm | SIZE A3 | SHEET 1/2 | REV. 0

I-PEX


PART NO.	Pos.	TEST BOARD No.	CONNECTOR P/N
91799-020B	20	TB-1487	20799-020E-01
91799-030B	30	TB-1487	20799-030E-01
91799-040B	40	TB-868	20799-040E-01
91799-050B	50	TB-868	20799-050E-01
91799-060B	60	TB-1488	20799-060E-01




20P SHAPE




30P SHAPE




40P SHAPE



50P SHAPE

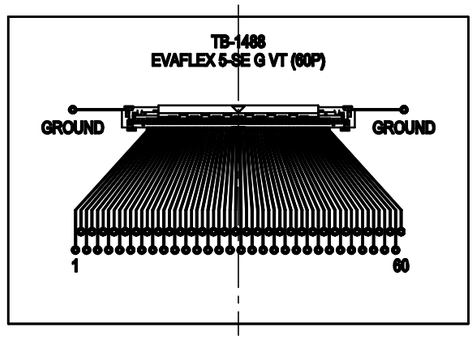

60P SHAPE

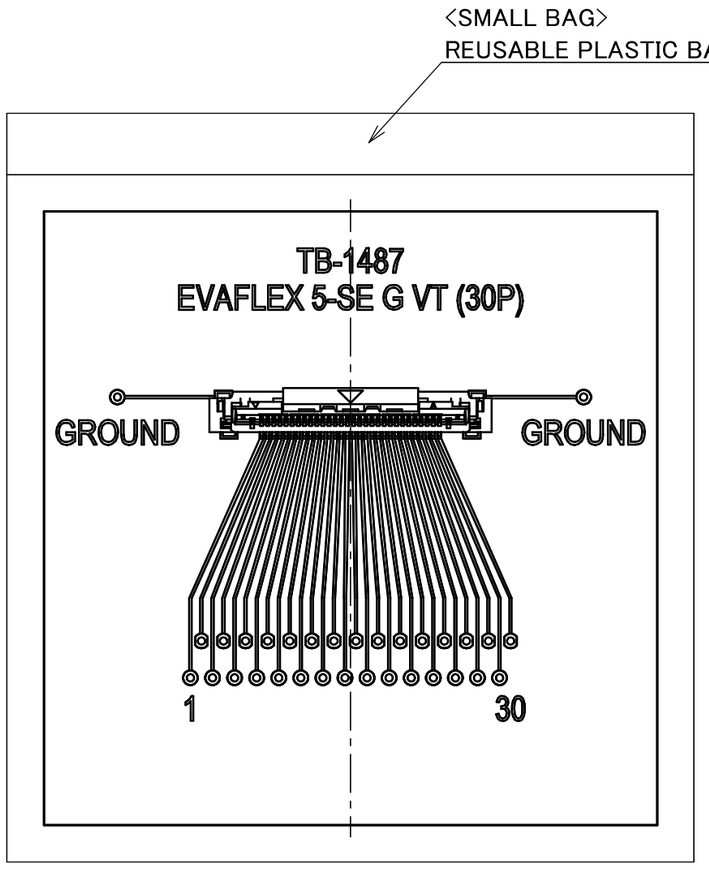

PACKING STYLE
(S = 2 : 1)

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.	CUSTOMER COPY	
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5		R0		
GENERAL TOLERANCE.				TITLE	SCALE		
DWG.	DATE			EVAFLEX® 5-SE G VT CONTINUITY TEST BOARD ASSEMBLY	1:1	I-PEX	
CHK.					UNIT mm		
APP.				DWG. No. 91799	SIZE A3	SHEET 2/2	REV. 0