
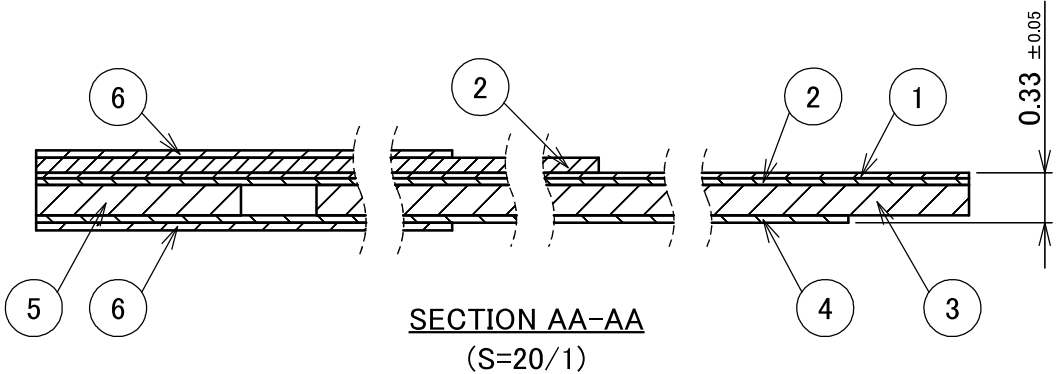
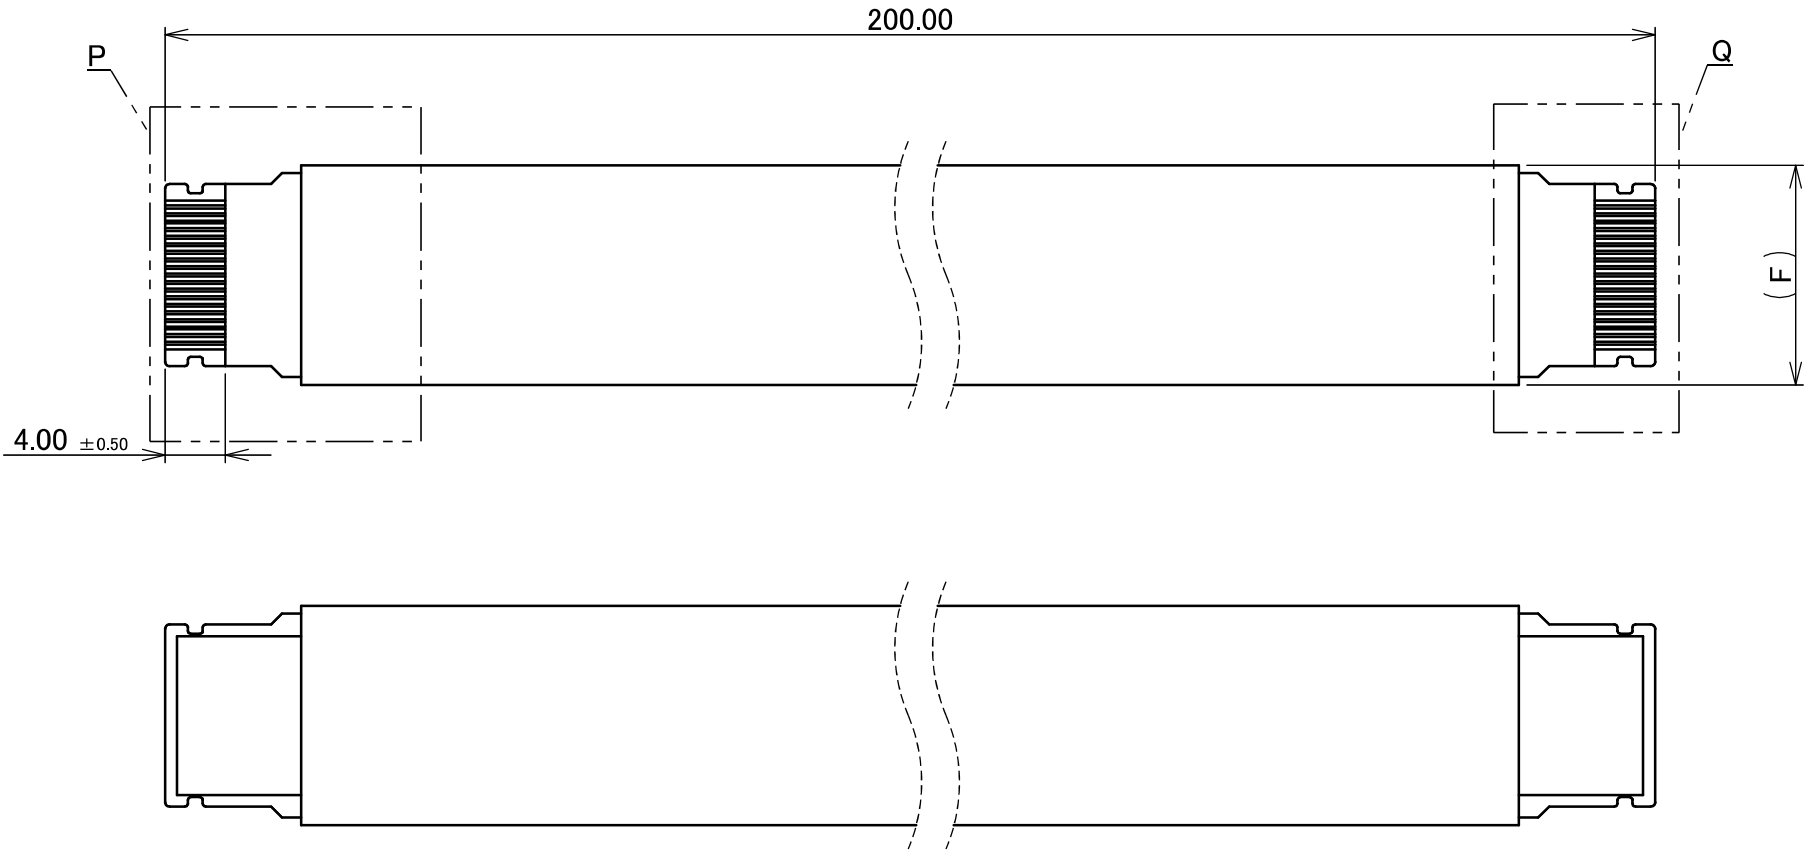
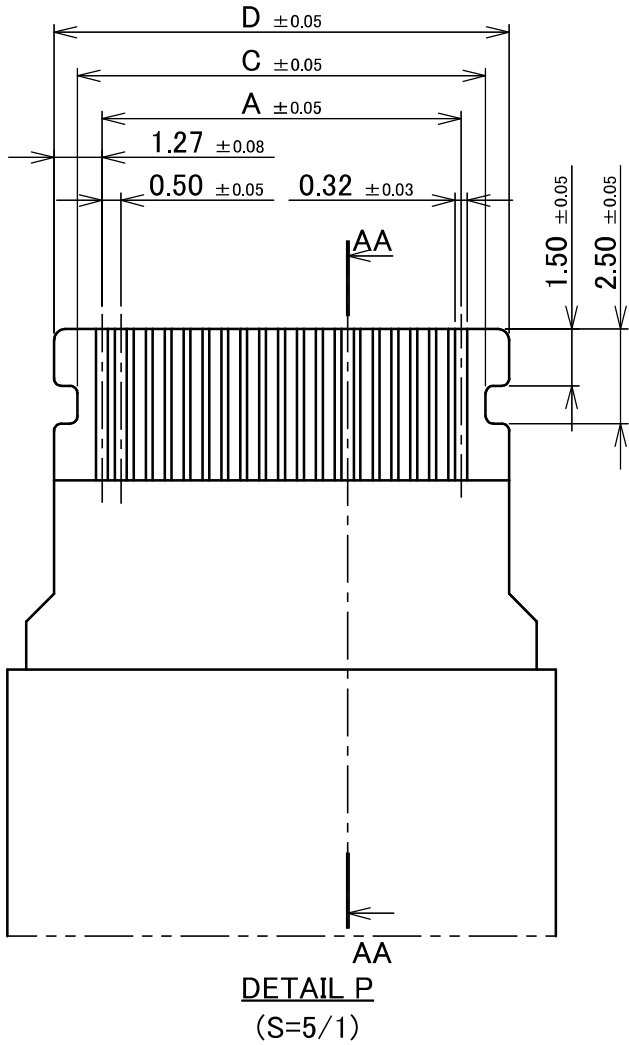



PART No.	A	C	D	F
91719-010B-01	4.50	5.80	7.04	9.50
91719-015B-01	7.00	8.30	9.54	12.00
91719-020B-01	9.50	10.80	12.04	14.50
91719-024B-01	11.50	12.80	14.04	16.50
91719-030B-01	14.50	15.80	17.04	20.50
91719-040B-01	19.50	20.80	22.04	25.50
91719-050B-01	24.50	25.80	27.04	29.50




6	SHIELD TAPE	METALIC FILM	-
5	INTERLAYER	ARBITRARY	-
4	GROUND PLATE	METARIC FILM	POLISH or HALF POLISH Sn PLATING
3	REINFORCED TAPE	ARBITRARY	-
2	INSULATION FILM	ARBITRARY	-
1	CONDUCTOR	COPPER ALLOY	CONTACT AREA: Au 0.05 μ m MIN. OVER Ni 0.5 μ m MIN.
NO.	DESCRIPTION	MATERIAL	FINISH, REMARKS

NOTE.
1. DIFFERENTIAL IMPEDANCE: $100 \pm 10 \Omega$


					ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. R0	CUSTOMER COPY		
					6 MAX.	±0.2	30 OVER 120 MAX.	±0.5					
					GENERAL TOLERANCE.				TITLE 0.5mm PITCH FFC FOR EVAFLEX® 5-VS		SCALE	I-PEX	
					DWG.	DATE		CHK. M.Muro			2:1		
1	ZC00782	D.N	2026/06/24	H.I	T.Minohara		2026/04/27				UNIT		
0	ZC00645	Mino	2026/04/27	—							mm		
REV.	ECN	BY	DATE	APP.	APP.				DWG. No.	91719	SIZE	SHEET	REV.
REVISION RECORD					H.Ikari						A3	1/2	1

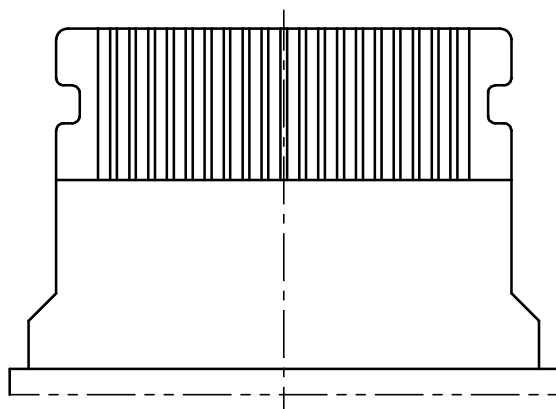


DETAIL P, Q
10P, 15P, 20P, 24P, 50P
(S=5/1)

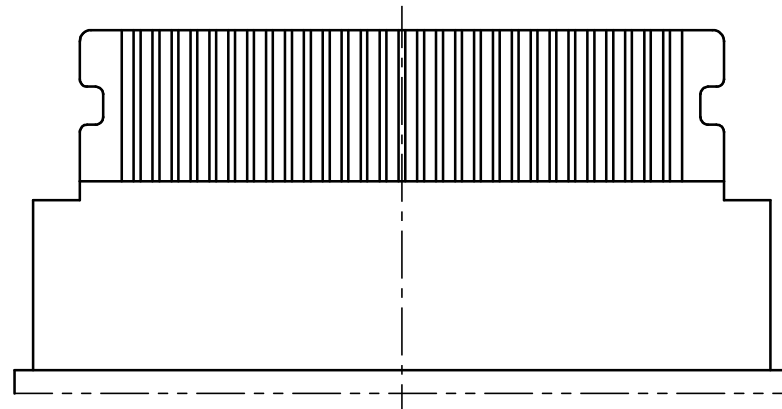

DETAIL P, Q
30P
(SE=5/1)

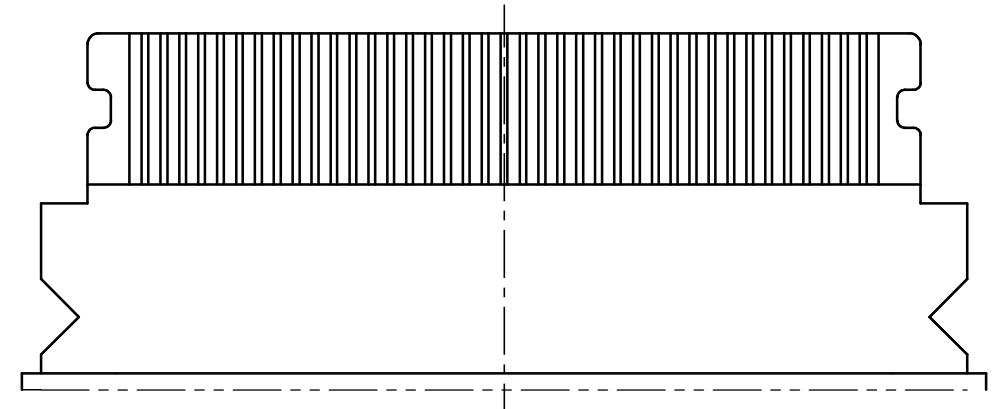

DETAIL P
40P
(S=5/1)

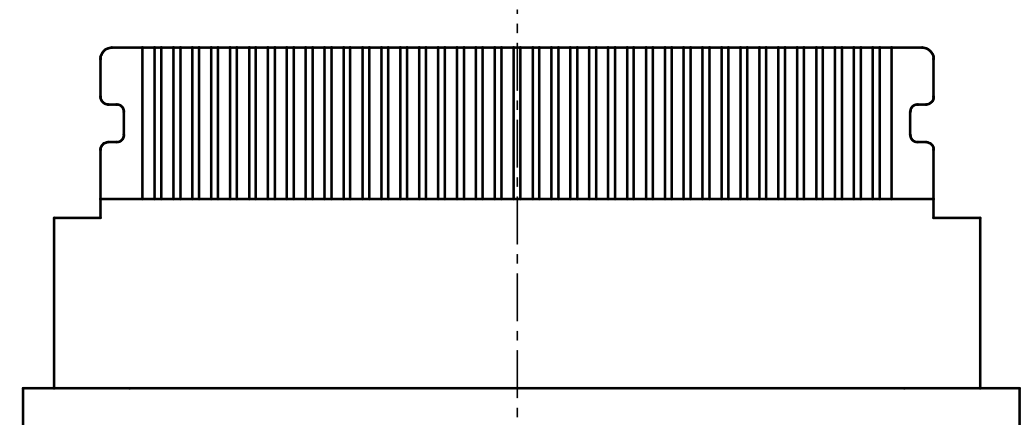

DETAIL Q
40P
(S=5/1)

ANGLE	±2°	6 OVER 30 MAX.	±0.3		SERIES No. R0	CUSTOMER COPY		
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5					
GENERAL TOLERANCE.				TITLE 0.5mm PITCH FFC FOR EVAFLEX® 5-VS		SCALE	I-PEX	
DWG.		DATE				2:1		
CHK.						UNIT		
						mm		
APP.				DWG. No. 91719		SIZE A3	SHEET 2/2	REV. 1