

**RECOMMENDED PART No. 91685-000B-0 \***


PART No.	A	B
91685-000B-01	100	107.65
91685-000B-02	200	207.65
91685-000B-03	300	307.65



RoHS Compliant

**TABLE 1. WIRE INFORMATION**

CONDUCTOR			INSULATION			
MATERIAL	NOMINAL SECTIONAL AREA (mm <sup>2</sup> )	COMPOSITION (pcs / mm)	OUTSIDE DIA. (mm)	MATERIAL	NOMINAL THICKNESS (mm)	OUTSIDE DIA. (mm)
TINNED ANNEALED COPPER WIRE	0.30	12 / 0.18	0.72	HEAT RESISTANT FLAME RETARDANT IRRADIATED POLYETHYLENE	0.34	1.40

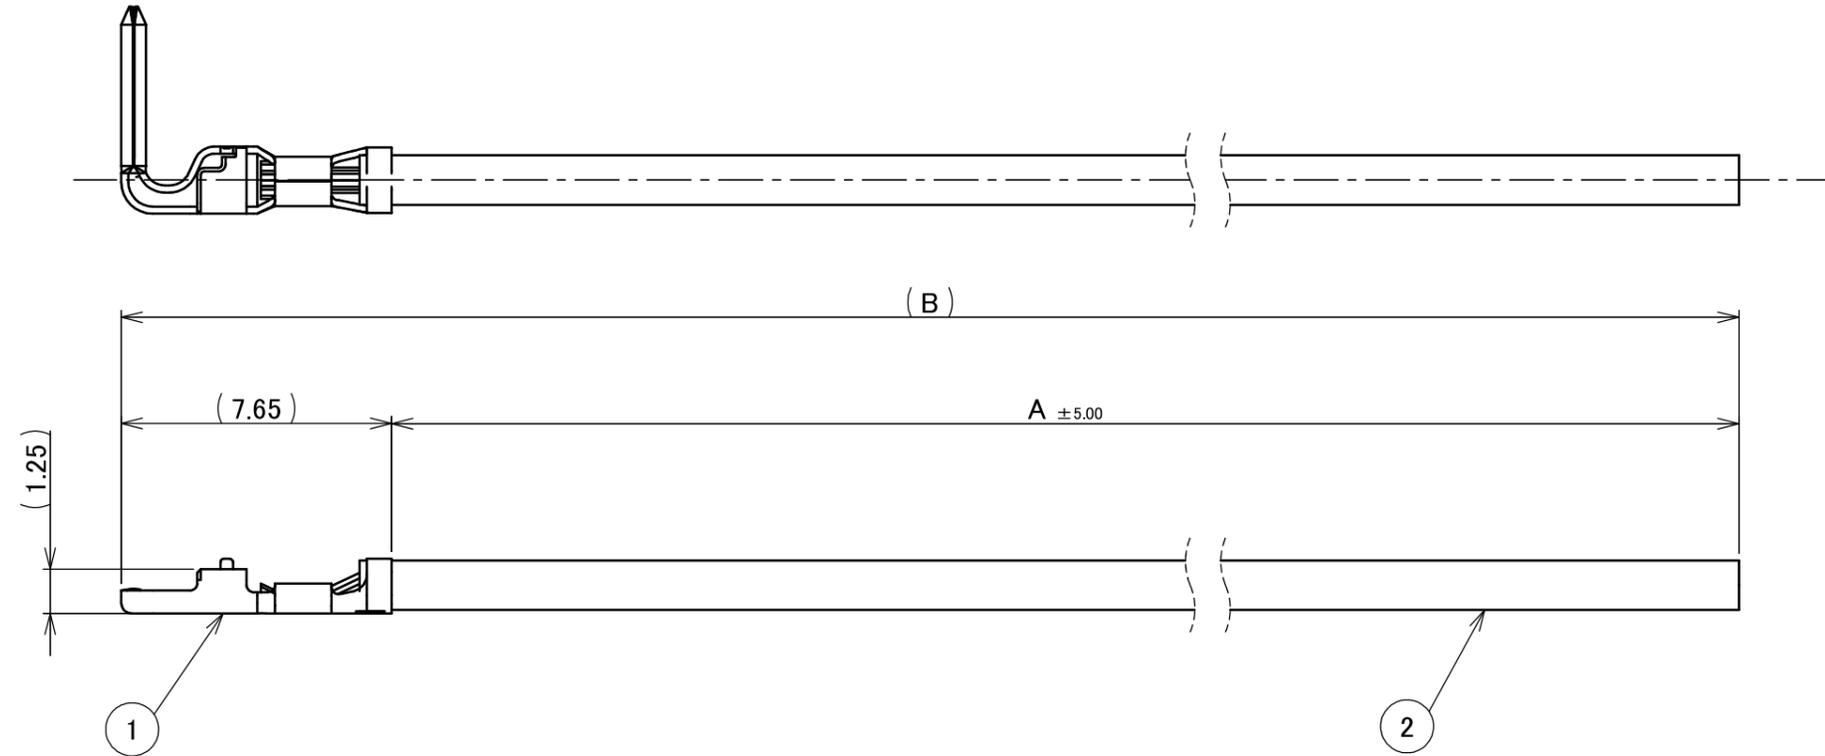

**NOTES**

- 1.PACKING:PLASTIC BAG
- 2.CABLE CRIMP STRENGTH : 50N Min
- 3.TO HANDLE THIS JUMPER WIRE  
FOLLOW THE INSTRUCTION MANUAL BELOW.  
I-PEX INSTRUCTION MANUAL NO. HDM-0025
- 4.CRIMPING DIRECTION OF TERMINAL : NOT SPECIFIED.

2	CABLE	SEE TABLE 1	SEE TABLE 1
1	TERMINAL	COPPER ALLOY	Sn OVER Cu
NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. R0	CUSTOMER COPY		
	6 MAX.	±0.2	30 OVER 120 MAX.				±0.5	
GENERAL TOLERANCE.				TITLE IARPB® HORIZONTAL JUMPER WIRE	SCALE 5:1	UNIT mm		
DWG.	DATE							
CHK.	D.Matsushita 2026/03/03							
0	ZC00507	D.M	Mar./03/'26	-	CHK. K.Tsusu	SIZE A3	SHEET 1/1	REV. 0
REV.	ECN	BY	DATE	APP.	APP. T.Takeda			
REVISION RECORD					DWG. No.	91685		