

**RECOMMENDED PART No. 91686-000B-0 \***


PART No.	A	B
91686-000B-01	100	111.40
91686-000B-02	200	211.40
91686-000B-03	300	311.40



RoHS Compliant

**TABLE 1. WIRE INFORMATION**

CONDUCTOR				INSULATION		
MATERIAL	NOMINAL SECTIONAL AREA (mm <sup>2</sup> )	COMPOSITION (pcs/ mm)	OUTSIDE DIA. (mm)	MATERIAL	NOMINAL THICKNESS (mm)	OUTSIDE DIA. (mm)
TINNED ANNEALED COPPER WIRE	0.30	12 / 0.18	0.72	HEAT RESISTANT FLAME RETARDANT IRRADIATED POLYETHYLENE	0.34	1.40

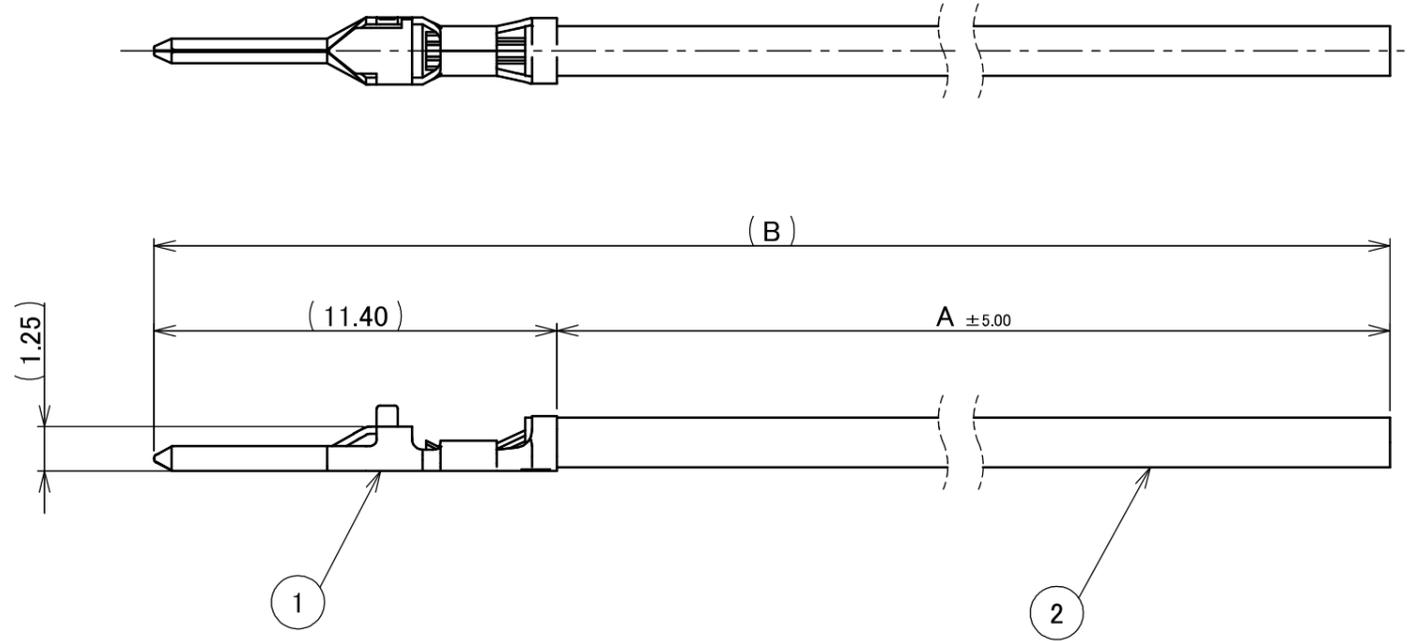

**NOTES**

- 1.PACKING:PLASTIC BAG
- 2.CABLE CRIMP STRENGTH : 50N Min
- 3.TO HANDLE THIS JUMPER WIRE  
FOLLOW THE INSTRUCTION MANUAL BELOW.  
I-PEX INSTRUCTION MANUAL NO. HDM-0035
- 4.CRIMPING DIRECTION OF TERMINAL : NOT SPECIFIED.

2	CABLE	SEE TABLE 1	SEE TABLE 1
1	TERMINAL	COPPER ALLOY	Sn OVER Cu
NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. R0	CUSTOMER COPY
	6 MAX.	±0.2	30 OVER 120 MAX.			
GENERAL TOLERANCE.				TITLE IARPB® VERTICAL JUMPER WIRE	SCALE 5:1	UNIT mm
DWG.	DATE					
0	ZC00507	D.M	Mar./03/'26			
REV.	ECN	BY	DATE	APP.	CHK.	
REVISION RECORD				T.Takeda	DWG. No.	91686
					SIZE	A3
					SHEET	1/1
					REV.	0