

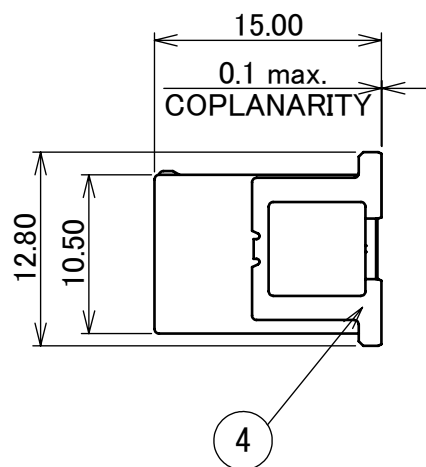
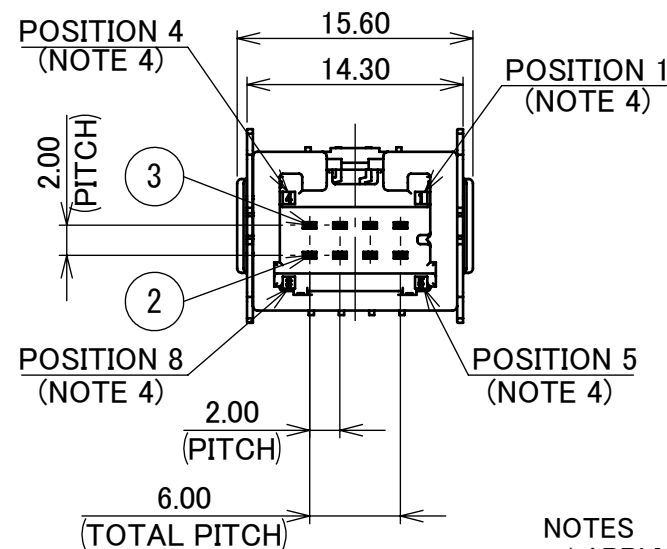


RECOMMENDED PART No. V0026-008E-001



PART NO.	VACUUM CAP
V0026-008E-001	WITH

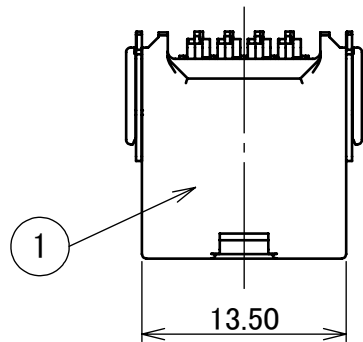

- NOTES
- 1.APPLICABLE PART NO.:
 - FEMALE HOUSING...V0027-91008-211
 - FEMALE RETAINER...V0116-92008-01
 - FEMALE TERMINAL...VT009-01, VT009-02
 2. COMPLY WITH ELV/RoHS
 3. USE METAL MASK WHICH HAS A THICKNESS OF 0.15mm MIN. WHEN THE MALE CONNECTOR IS MOUNTED ON THE PCB.
 4. POSITION NUMBERS ARE INDICATED.





PART NO : V0026-008E-001

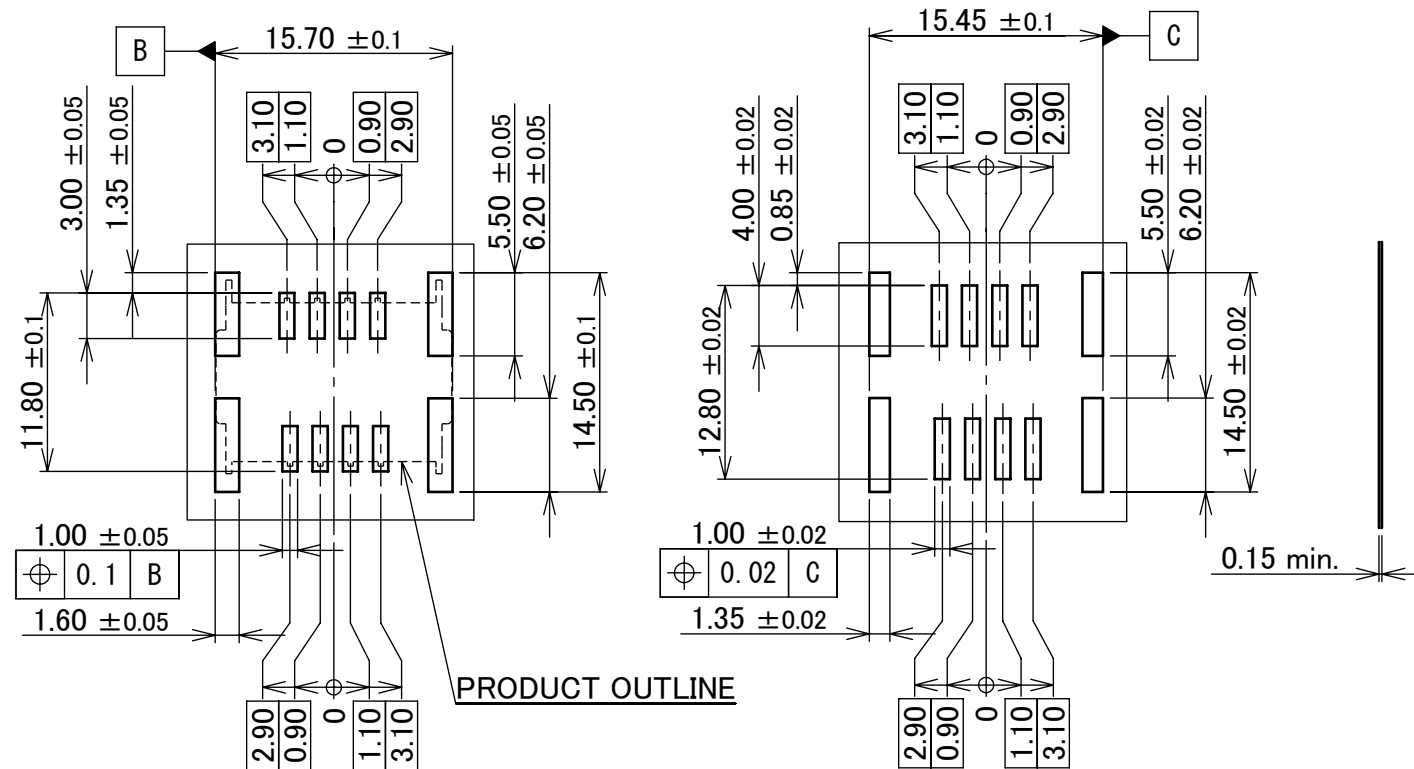

RECOMMENDED FOOTPRINT PATTERN LAYOUT

RECOMMENDED METAL MASK LAYOUT

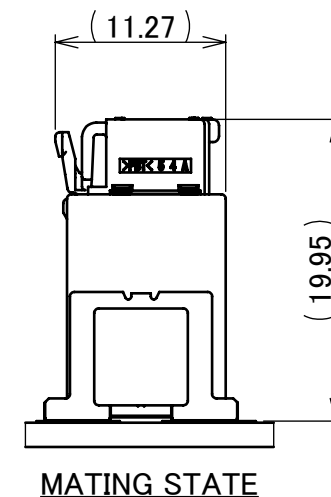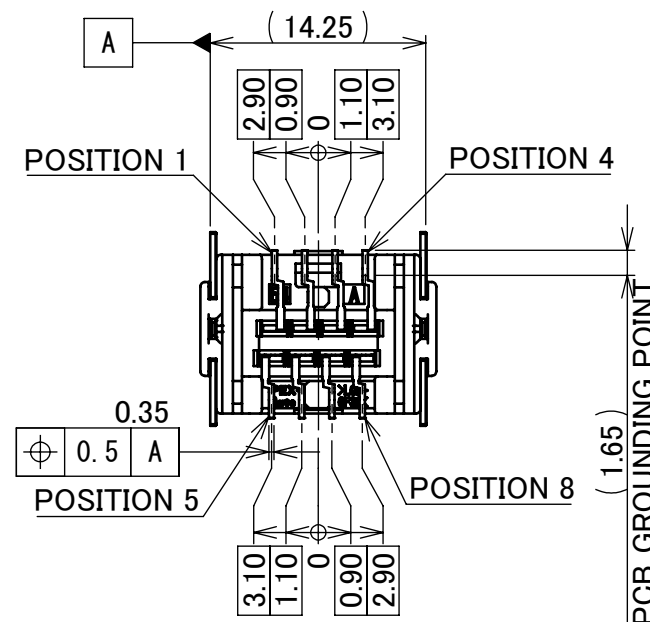

MATING STATE

5	VACUUM CAP	GLASS-FILLED LCP	NATURAL
4	HOLD DOWN	BRASS	Sn REFLOW
3	MALE TERMINAL-2	BRASS	Sn REFLOW
2	MALE TERMINAL-1	BRASS	Sn REFLOW
1	MALE HOUSING	GLASS-FILLED LCP	BLACK/UL94V-0
NO.	DESCRIPTION	MATERIAL	FINISH/COLOR/REMARKS

					ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.	CUSTOMER COPY
					6 MAX.	±0.2	30 OVER 120 MAX.	±0.5	⊕	R0	
					GENERAL TOLERANCE.				TITLE	SCALE	I-PEX
					DWG.		DATE		ISH® -V VERTICAL	2:1	
					CHK.				MALE ASSEMBLY	UNIT	
1	ZC00986	C.S	Sept./25/'26	T.Tkd			2023/05/22		8P	mm	
0	S2352	H.H	May/22/'23	-						SIZE	
REV.	ECN	BY	DATE	APP.	APP.				DWG. No.	A3	
REVISION RECORD					J.Tateishi				CV0026-008-G	SHEET	
										1/1	
										REV.	
										1	