

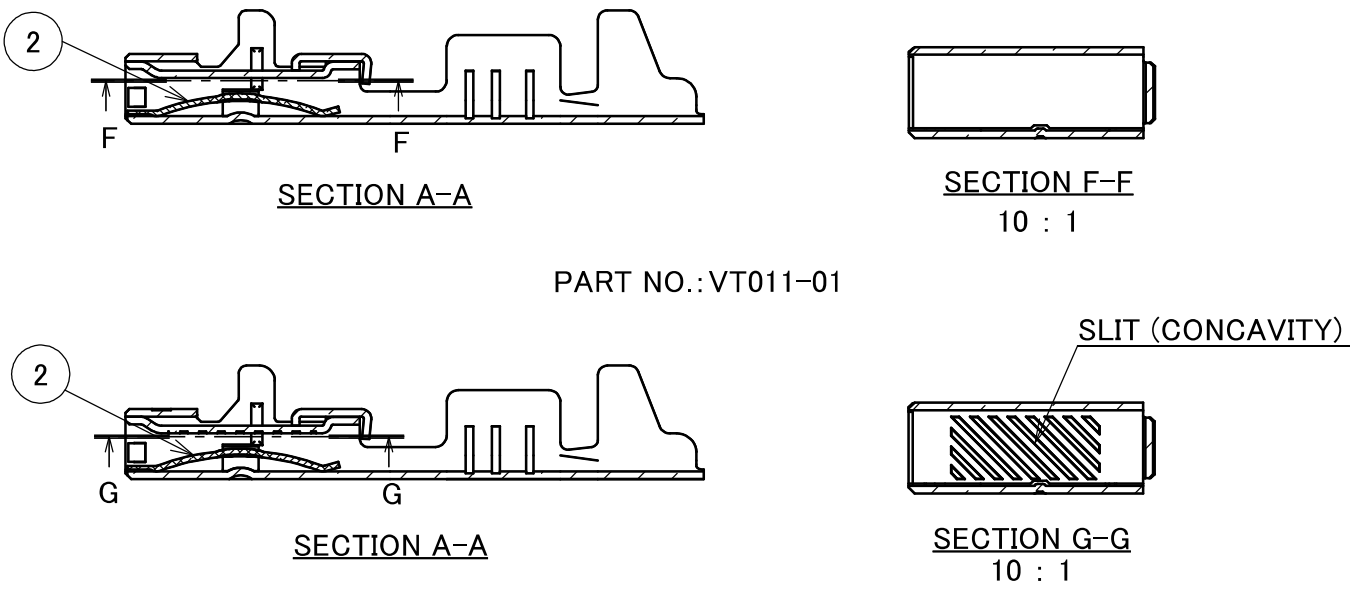


RECOMMENDED PART No. VT011-0*


PART NO.	CONDUCTOR WIRE SIZE	OVER ALL DIAMETER	A	B	C	D	PLATING
VT011-01	0.5 SQ / 20 AWG	Φ 1.93 mm MAX.	2.20	2.35	3.30	3.00	Sn REFLOW
VT011-02							
VT011-03	0.75 SQ / 18 AWG	Φ 2.50 mm MAX.	2.60	2.90	4.20	3.85	
VT011-04	1.25 SQ / 16 AWG	Φ 2.84 mm MAX.	2.60	2.90	4.70	4.40	

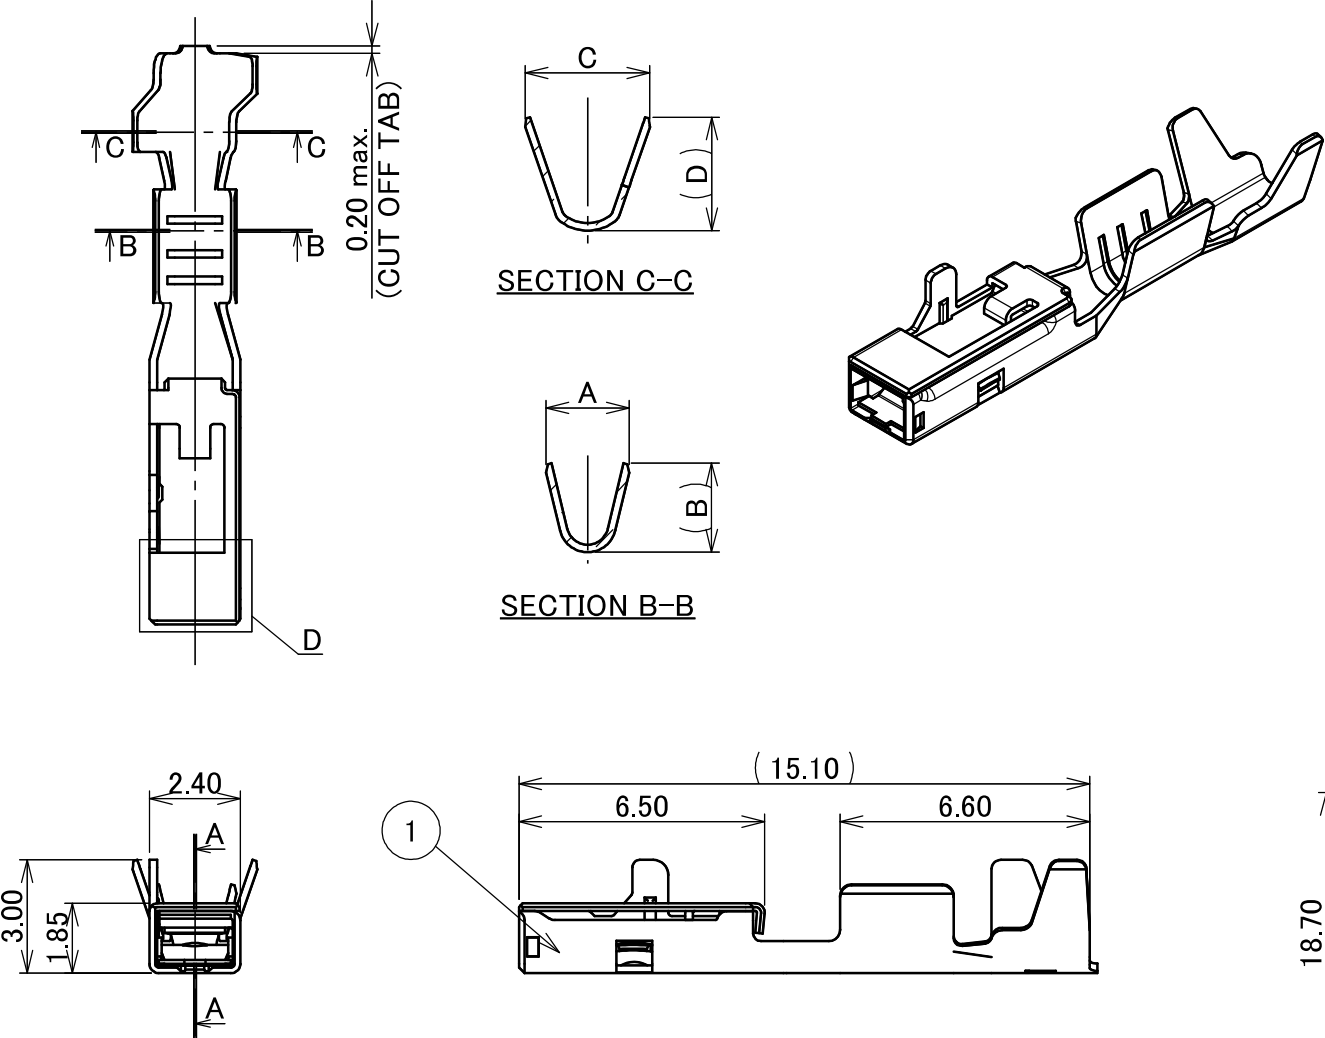

PART NO.: VT011-02, VT011-03, VT011-04
LOW INSERTION FORCE VERSION

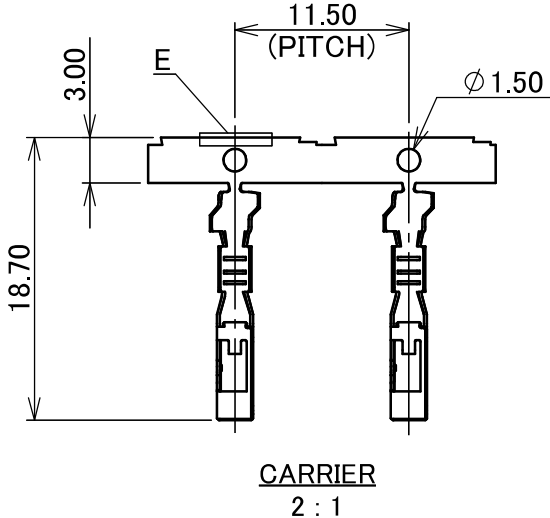

NOTE
1. APPLICABLE FEMALE HOUSING: ISH CONNECTOR SERIES
2. COMPLY WITH ELV/RoHS.
3. TERMINAL CRIMP SPECIFICATION MUST BE COMPLIANT WITH HANDLING MANUAL [HDM-0021].

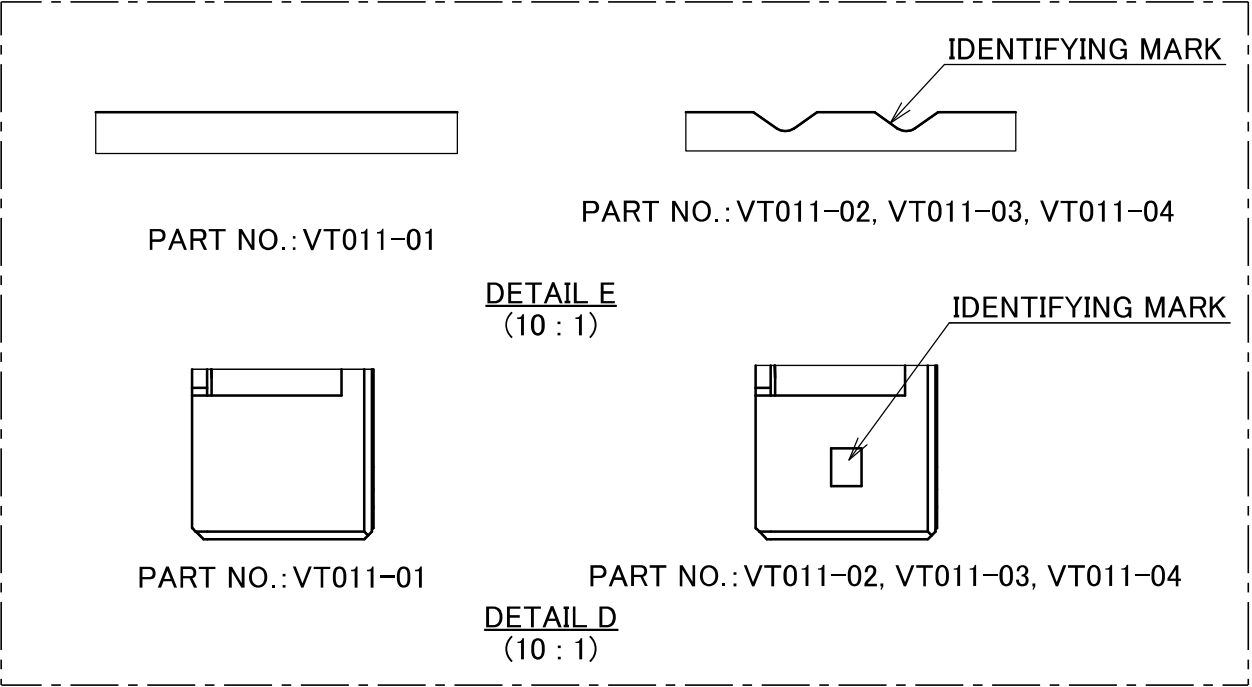

2	SPRING	COPPER ALLOY	Sn REFLOW
1	BODY	BRASS	Sn REFLOW
NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS

					ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.	CUSTOMER COPY
					6 MAX.	±0.2	30 OVER 120 MAX.	±0.5	ISH®	R2	
					GENERAL TOLERANCE.				TITLE		SCALE
					DWG.	H.Hamachi	DATE	2023/03/31	FEMALE TERMINAL		5:1
					CHK.	J.Mukunoki			1.5 mm		UNIT
					APP.	J.Tateishi			DWG. No.		mm
					REVISION RECORD				CVT011		SIZE
									A3		SHEET
									1/1		REV.
									1		