



RECOMMENDED PART No. 91683-000B-0 *

PART No.	A	B
91683-000B-01	100	124.20
91683-000B-02	200	224.20
91683-000B-03	300	324.20

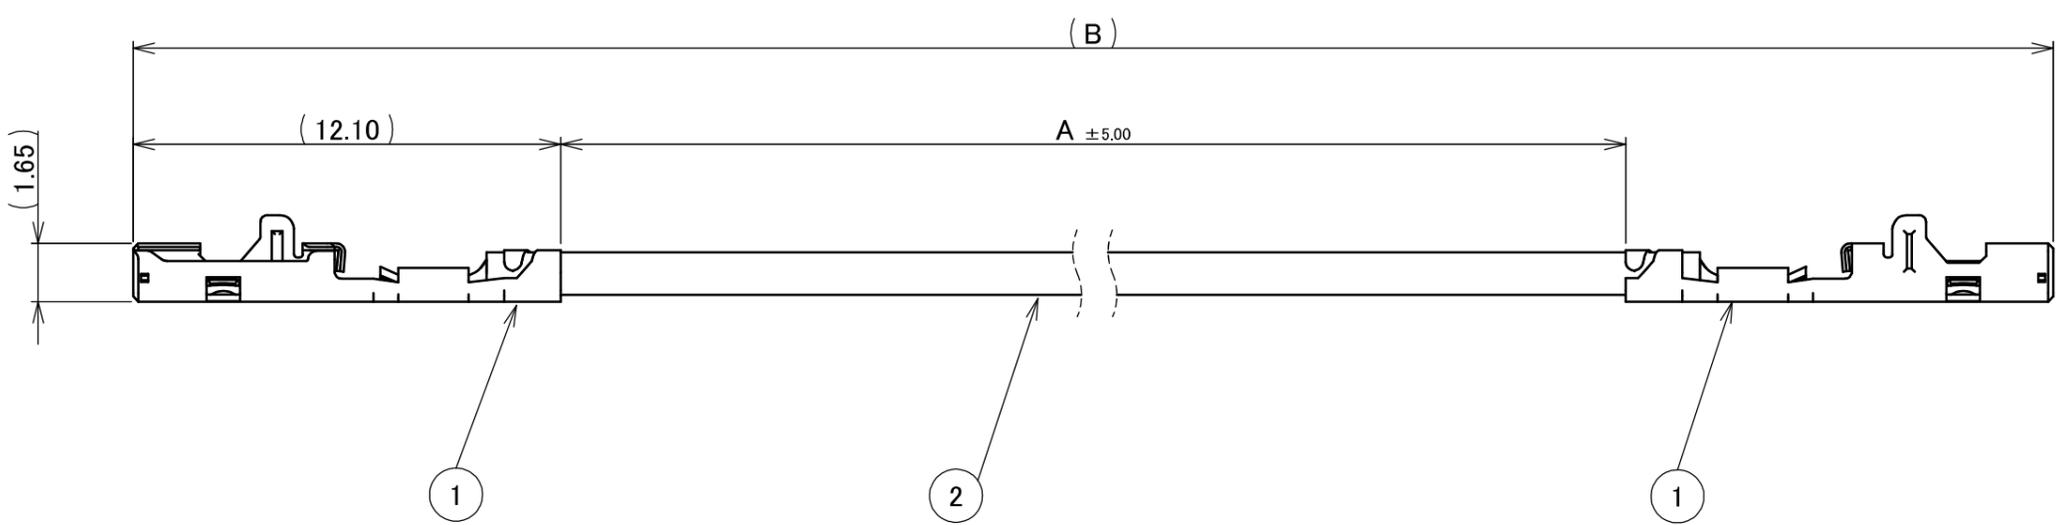

RoHS Compliant



NOTES

- 1.PACKING:PLASTIC BAG
- 2.CABLE CRIMP STRENGTH:50N Min
- 3.TO HANDLE THIS JUMPER WIRE
FOLLOW THE INSTRUCTION MANUAL BELOW.
I-PEX INSTRUCTION MANUAL NO. HDM-0020 OR HDM-0021
- 4.CRIMPING DIRECTION OF TERMINAL:NOT SPECIFIED.

2	CABLE	TINNED ANNEALED COPPER WIRE. HEAT RESISTANT FLAME RETARDANT IRRADIATED POLYETHYLENE	-
1	TERMINAL	COPPER ALLOY	Sn OVER Cu
NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS

				ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. R0	CUSTOMER COPY	
				6 MAX.	±0.2	30 OVER 120 MAX.	±0.5				
				GENERAL TOLERANCE.				TITLE ISH® JUMPER WIRE (0.5mm TERM)	SCALE 5:1 UNIT mm	I-PEX	
				DWG.	DATE						
				D.Matsushita 2026/03/03							
				CHK.	K.Tsusu			DWG. No. 91683	SIZE A3	SHEET 1/1	REV. 0
0	ZC00508	D.M	Mar./03/'26	-	APP.						
REV.	ECN	BY	DATE	APP.	T.Takeda						
REVISION RECORD											