
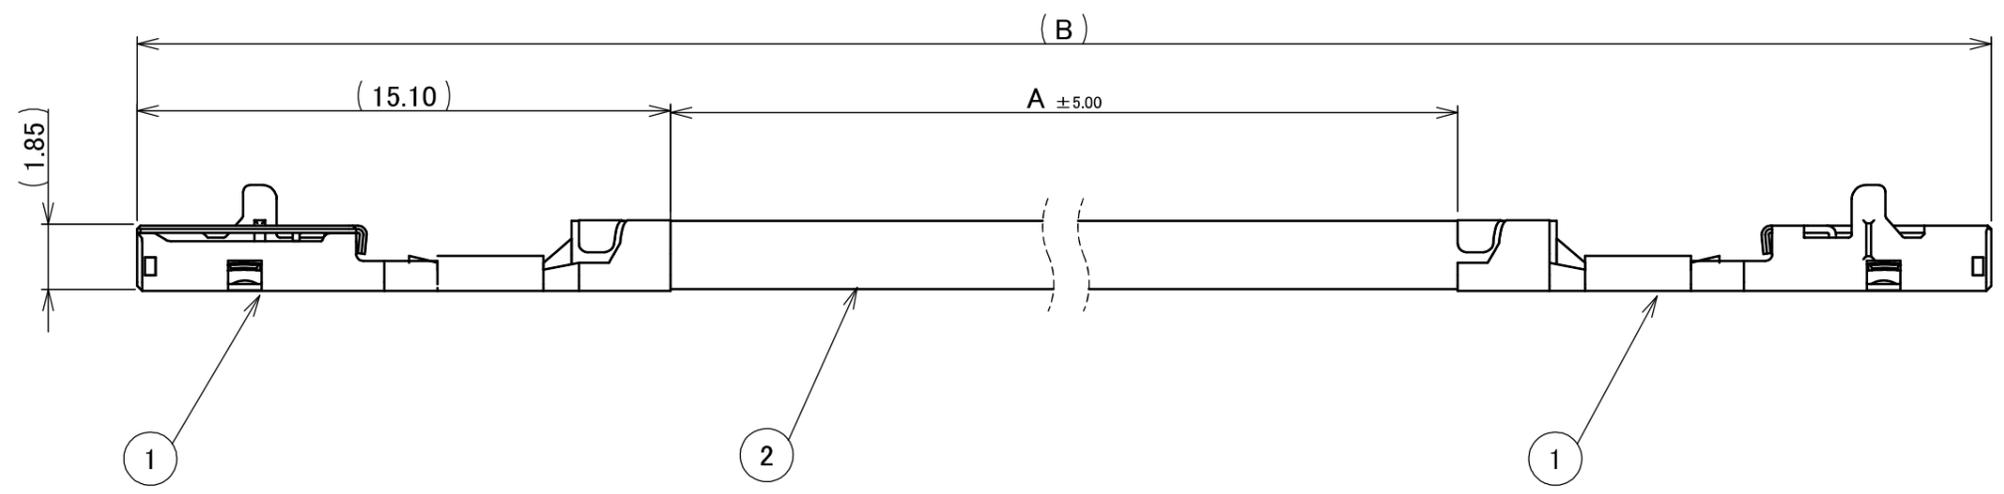


RECOMMENDED PART No. 91684-000B-0 *

PART No.	A	B
91684-000B-01	100	130.20
91684-000B-02	200	230.20
91684-000B-03	300	330.20



NOTES

- 1.PACKING:PLASTIC BAG
- 2.CABLE CRIMP STRENGTH:90N Min
- 3.TO HANDLE THIS JUMPER WIRE
FOLLOW THE INSTRUCTION MANUAL BELOW.
I-PEX INSTRUCTION MANUAL NO. HDM-0021
- 4.CRIMPING DIRECTION OF TERMINAL:NOT SPECIFIED.

2	CABLE	TINNED ANNEALED COPPER WIRE. HEAT RESISTANT FLAME RETARDANT IRRADIATED POLYETHYLENE	-
1	TERMINAL	COPPER ALLOY	Sn OVER Cu
NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS

					ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.	CUSTOMER COPY		
					6 MAX.	±0.2	30 OVER 120 MAX.	±0.5		R0	I-PEX		
					GENERAL TOLERANCE.				TITLE	SCALE			
					DWG.	DATE			ISH® JUMPER WIRE (1.5mm TERM)	5:1	A3		
					D.Matsushita		2026/03/03			UNIT			1/1
					CHK.	K.Tsusu			DWG. No.	91684	SIZE	SHEET	
					APP.	T.Takeda					A3	1/1	0
REVISION RECORD													