



PART No.  
82862-100B-02-D

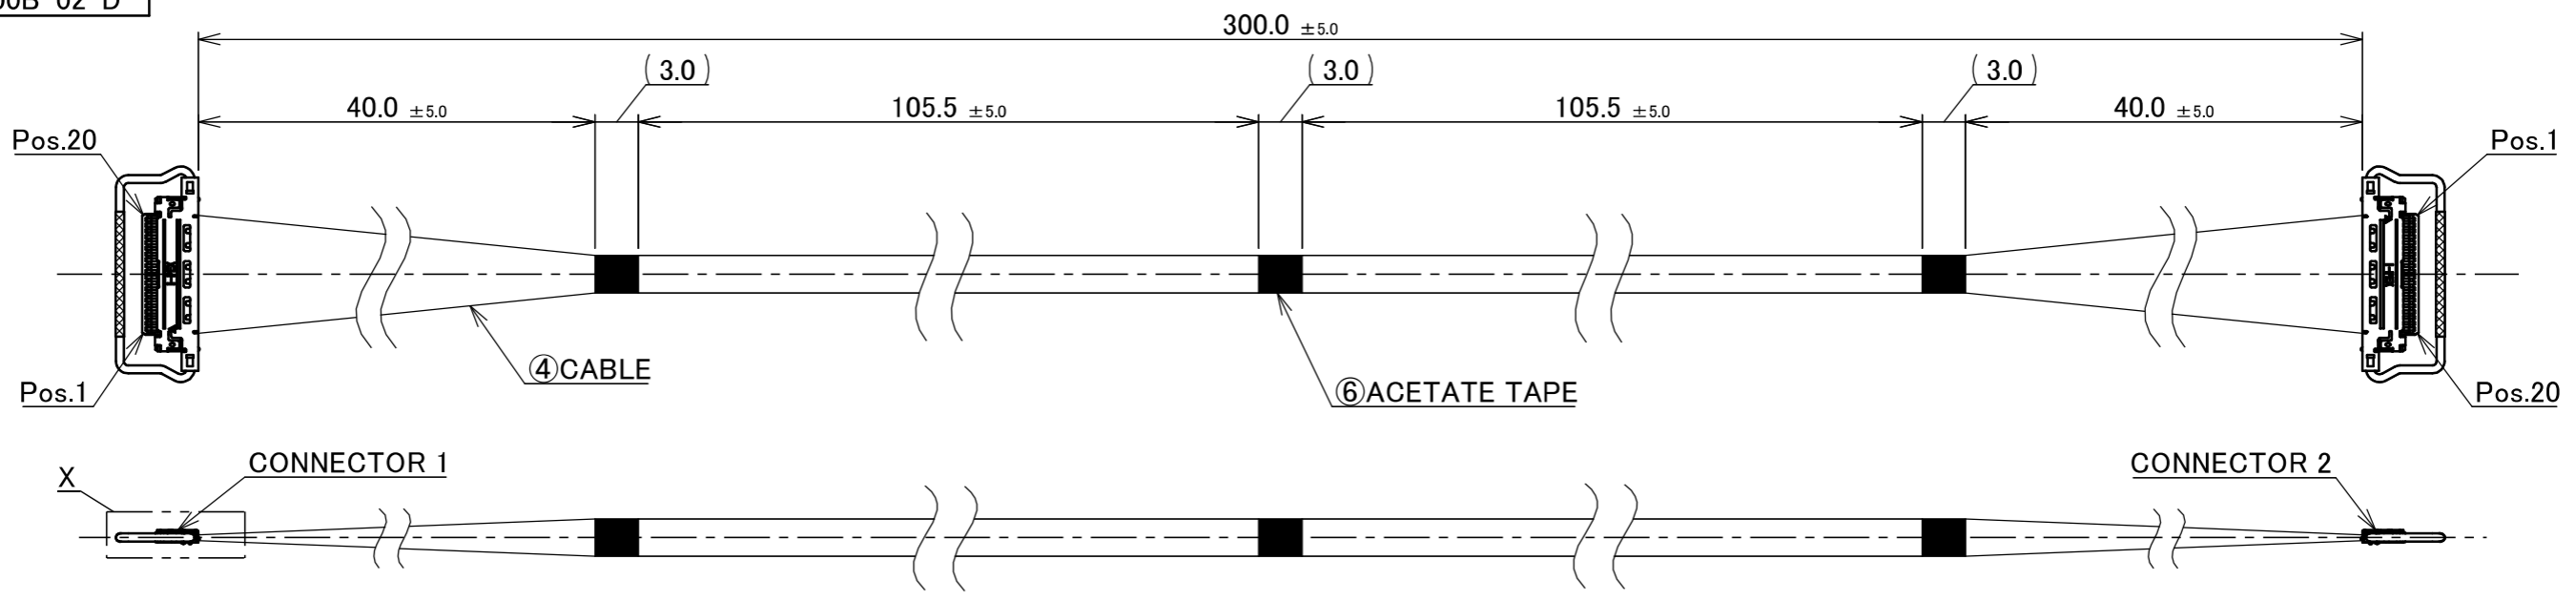

**CONNECTOR 1&2  
(S=5/1)**

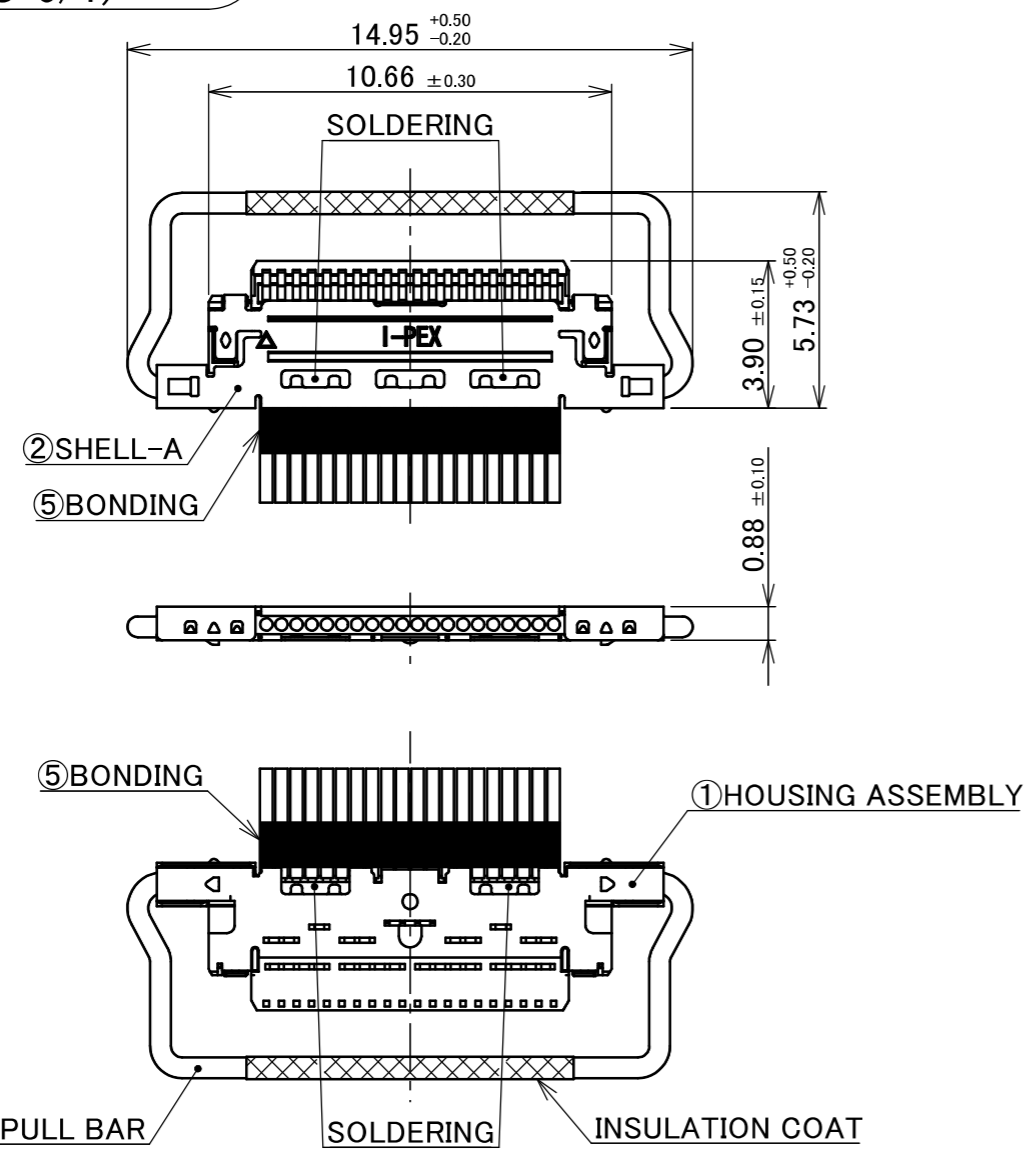

- NOTE.
- TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-09008.
  - ELECTRIC CHARACTERISTICS  
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.  
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
  - THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.
  - RATING VOLTAGE : 30V

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
20	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
19	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
·	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	·
·	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	·
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	19
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	20

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS																																																				
6	ACETATE TAPE	-	3	BLACK																																																				
5	BONDING	-	-	UV GLUE																																																				
4	CABLE	-	20	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE																																																				
3	PULL BAR	2766-0201	2	CONNECTOR 1&2  CABLIN <sup>®</sup> -CA PLUG P/N : 20633-220T-01S CONNECTOR TO BE MATED : 20525-020E-02																																																				
2	SHELL-A	2764-0201-002	2																																																					
1	HOUSING ASSEMBLY	20634-120T-02	2																																																					
<table border="1"> <tr> <td>ANGLE</td> <td>±2°</td> <td>6 OVER 30 MAX.</td> <td>±0.3</td> <td rowspan="2">PROJECTION ④</td> <td rowspan="2">SERIES No. IH-200016</td> <td rowspan="2">CUSTOMER COPY</td> </tr> <tr> <td></td> <td>6 MAX.</td> <td>±0.2</td> <td>30 OVER 120 MAX.</td> <td>±0.5</td> </tr> <tr> <td colspan="4">GENERAL TOLERANCE.</td> <td>TITLE</td> <td>SCALE</td> <td rowspan="3">I-PEX</td> </tr> <tr> <td colspan="4">DWG. K.Baba</td> <td>DATE 2026/04/08</td> <td>2:1</td> </tr> <tr> <td colspan="4">CHK. R.Takei</td> <td></td> <td>UNIT</td> </tr> <tr> <td>0</td> <td>ZM00760</td> <td>K.B</td> <td>2026/04/08</td> <td>-</td> <td>mm</td> <td rowspan="2">REV. SHEET</td> </tr> <tr> <td>REV.</td> <td>ECN</td> <td>BY</td> <td>DATE</td> <td>APP.</td> <td>DWG. No. 82862</td> <td>1/1</td> </tr> <tr> <td colspan="4">REVISION RECORD</td> <td>T.Masunaga</td> <td>SIZE A3</td> <td>REV. 0</td> </tr> </table>					ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ④	SERIES No. IH-200016	CUSTOMER COPY		6 MAX.	±0.2	30 OVER 120 MAX.	±0.5	GENERAL TOLERANCE.				TITLE	SCALE	I-PEX	DWG. K.Baba				DATE 2026/04/08	2:1	CHK. R.Takei					UNIT	0	ZM00760	K.B	2026/04/08	-	mm	REV. SHEET	REV.	ECN	BY	DATE	APP.	DWG. No. 82862	1/1	REVISION RECORD				T.Masunaga	SIZE A3	REV. 0
ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ④	SERIES No. IH-200016	CUSTOMER COPY																																																		
	6 MAX.	±0.2	30 OVER 120 MAX.				±0.5																																																	
GENERAL TOLERANCE.				TITLE	SCALE	I-PEX																																																		
DWG. K.Baba				DATE 2026/04/08	2:1																																																			
CHK. R.Takei					UNIT																																																			
0	ZM00760	K.B	2026/04/08	-	mm	REV. SHEET																																																		
REV.	ECN	BY	DATE	APP.	DWG. No. 82862		1/1																																																	
REVISION RECORD				T.Masunaga	SIZE A3	REV. 0																																																		