



PART No.
82982-100B-01-D

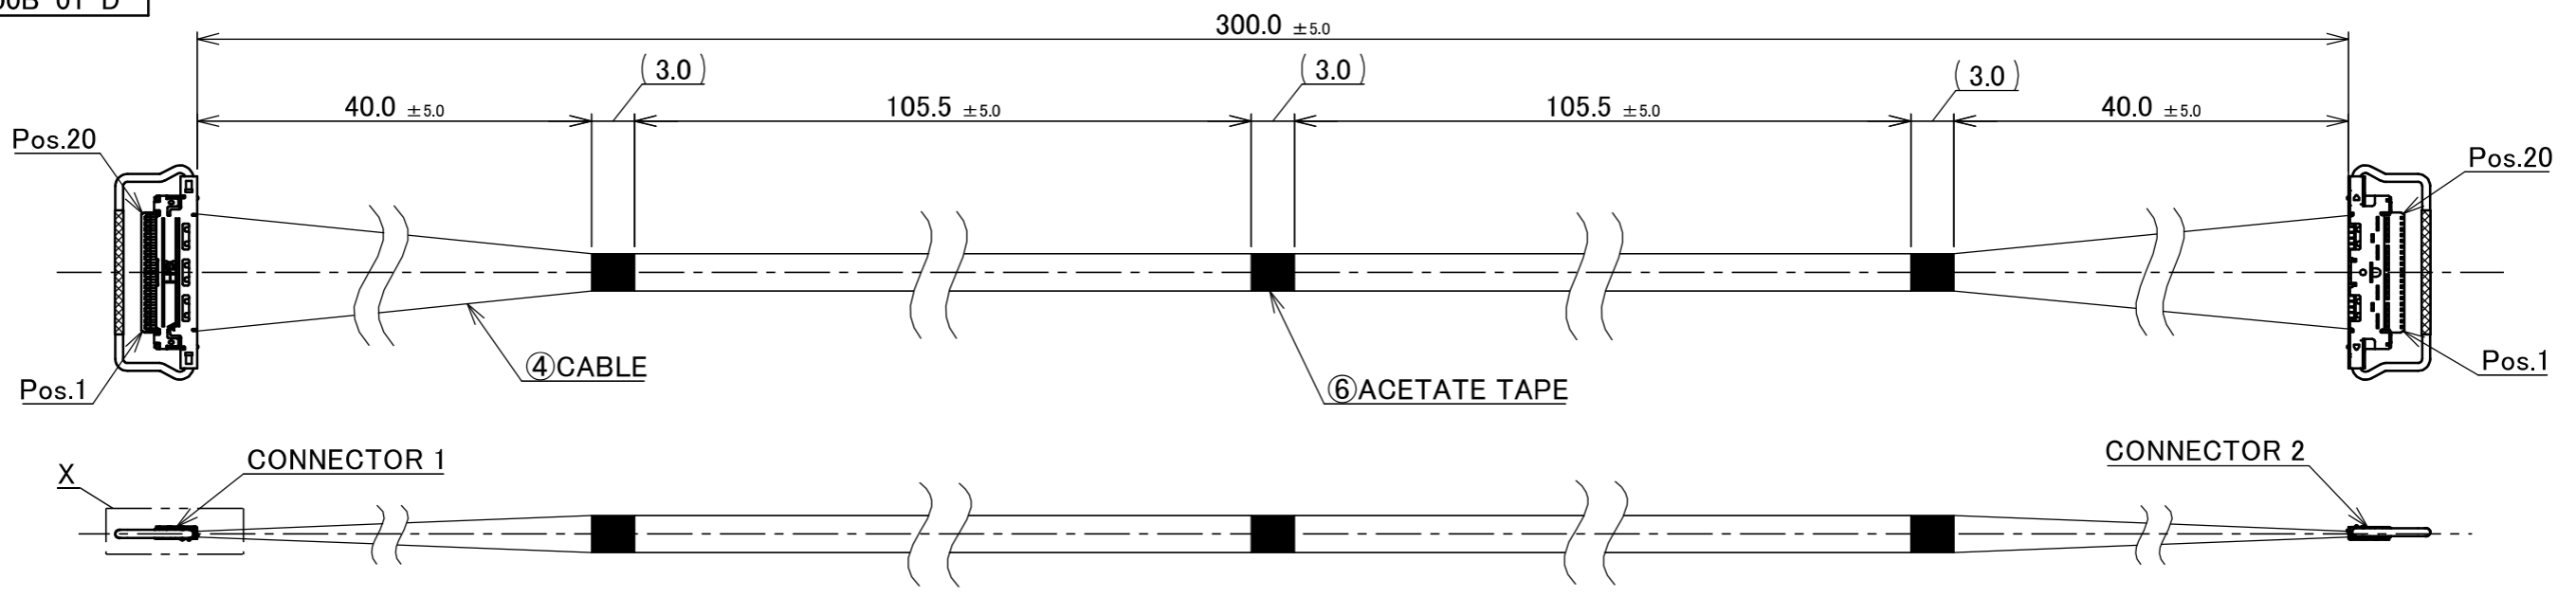

**CONNECTOR 1&2
(S=5/1)**

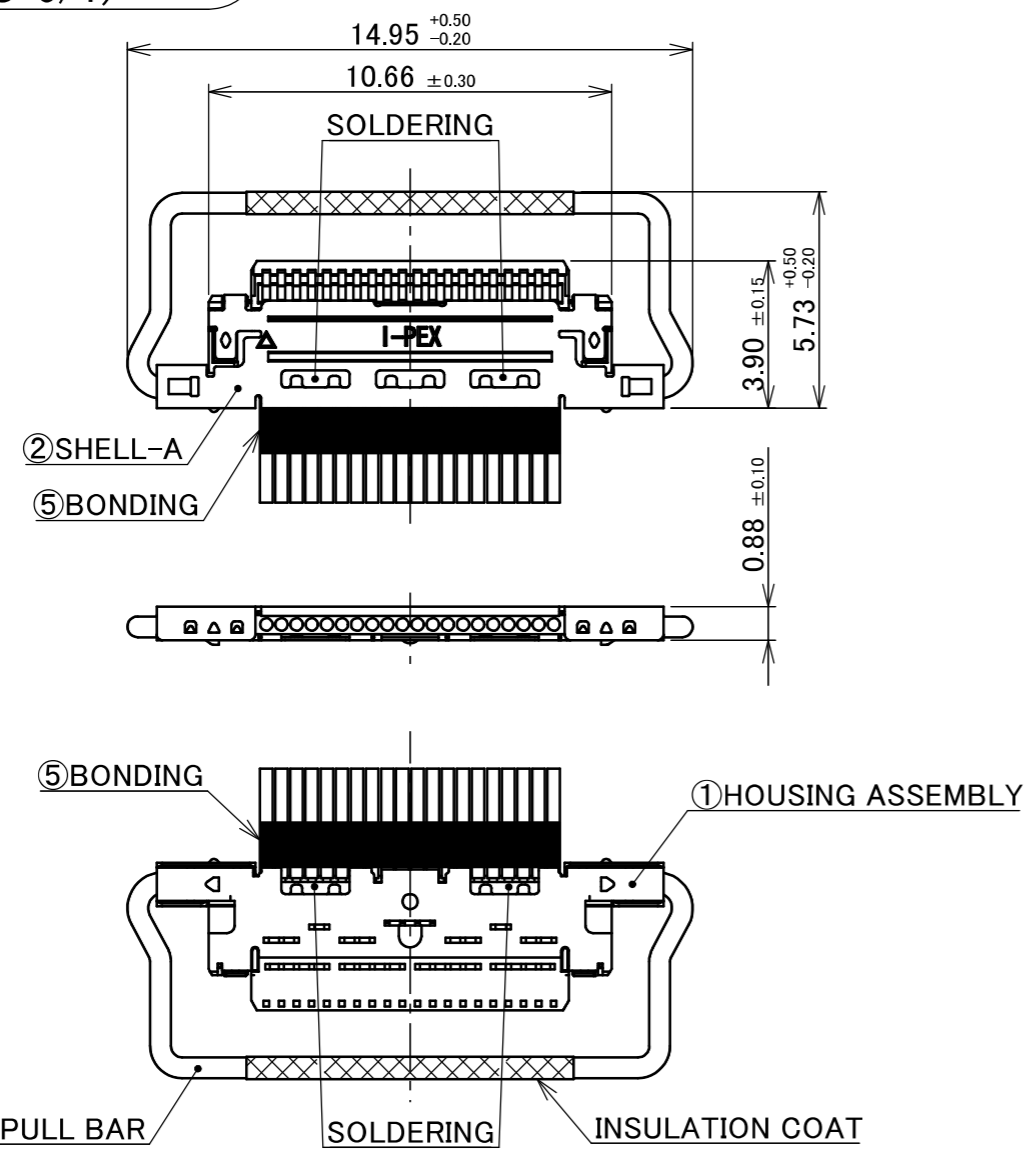

- NOTE.
- TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-09008.
 - ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 - THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.
 - RATING VOLTAGE : 30V

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
20	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	20
19	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	19
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS																																															
6	ACETATE TAPE	-	3	BLACK																																															
5	BONDING	-	-	UV GLUE																																															
4	CABLE	-	20	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE																																															
3	PULL BAR	2766-0201	2	CONNECTOR 1&2 CABLIN [®] -CA PLUG P/N : 20633-220T-01S CONNECTOR TO BE MATED : 20525-020E-02																																															
2	SHELL-A	2764-0201-002	2																																																
1	HOUSING ASSEMBLY	20634-120T-02	2																																																
<table border="1"> <tr> <td>ANGLE</td> <td>±2°</td> <td>6 OVER 30 MAX.</td> <td>±0.3</td> <td rowspan="2">PROJECTION </td> <td rowspan="2">SERIES No. IH-200016</td> <td rowspan="2">CUSTOMER COPY</td> </tr> <tr> <td></td> <td>6 MAX.</td> <td>±0.2</td> <td>30 OVER 120 MAX.</td> <td>±0.5</td> </tr> <tr> <td colspan="4">GENERAL TOLERANCE.</td> <td>TITLE</td> <td rowspan="2">SCALE 2:1</td> <td rowspan="2">UNIT mm</td> </tr> <tr> <td colspan="4">DWG. K.Fukutomi</td> <td>DATE</td> <td rowspan="2">SHEET</td> <td rowspan="2">REV.</td> </tr> <tr> <td colspan="4">CHK. R.Takei</td> <td></td> <td rowspan="2">SIZE A3</td> <td rowspan="2">SHEET 1/1</td> </tr> <tr> <td colspan="4">REV. ECN BY DATE APP.</td> <td>DWG. No.</td> <td colspan="2">REV. 0</td> </tr> <tr> <td colspan="4">REVISION RECORD</td> <td>T.Masunaga</td> <td colspan="2">82982</td> </tr> </table>					ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. IH-200016	CUSTOMER COPY		6 MAX.	±0.2	30 OVER 120 MAX.	±0.5	GENERAL TOLERANCE.				TITLE	SCALE 2:1	UNIT mm	DWG. K.Fukutomi				DATE	SHEET	REV.	CHK. R.Takei					SIZE A3	SHEET 1/1	REV. ECN BY DATE APP.				DWG. No.	REV. 0		REVISION RECORD				T.Masunaga	82982	
ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION 	SERIES No. IH-200016	CUSTOMER COPY																																													
	6 MAX.	±0.2	30 OVER 120 MAX.				±0.5																																												
GENERAL TOLERANCE.				TITLE	SCALE 2:1	UNIT mm																																													
DWG. K.Fukutomi				DATE			SHEET	REV.																																											
CHK. R.Takei					SIZE A3	SHEET 1/1																																													
REV. ECN BY DATE APP.				DWG. No.			REV. 0																																												
REVISION RECORD				T.Masunaga	82982																																														