

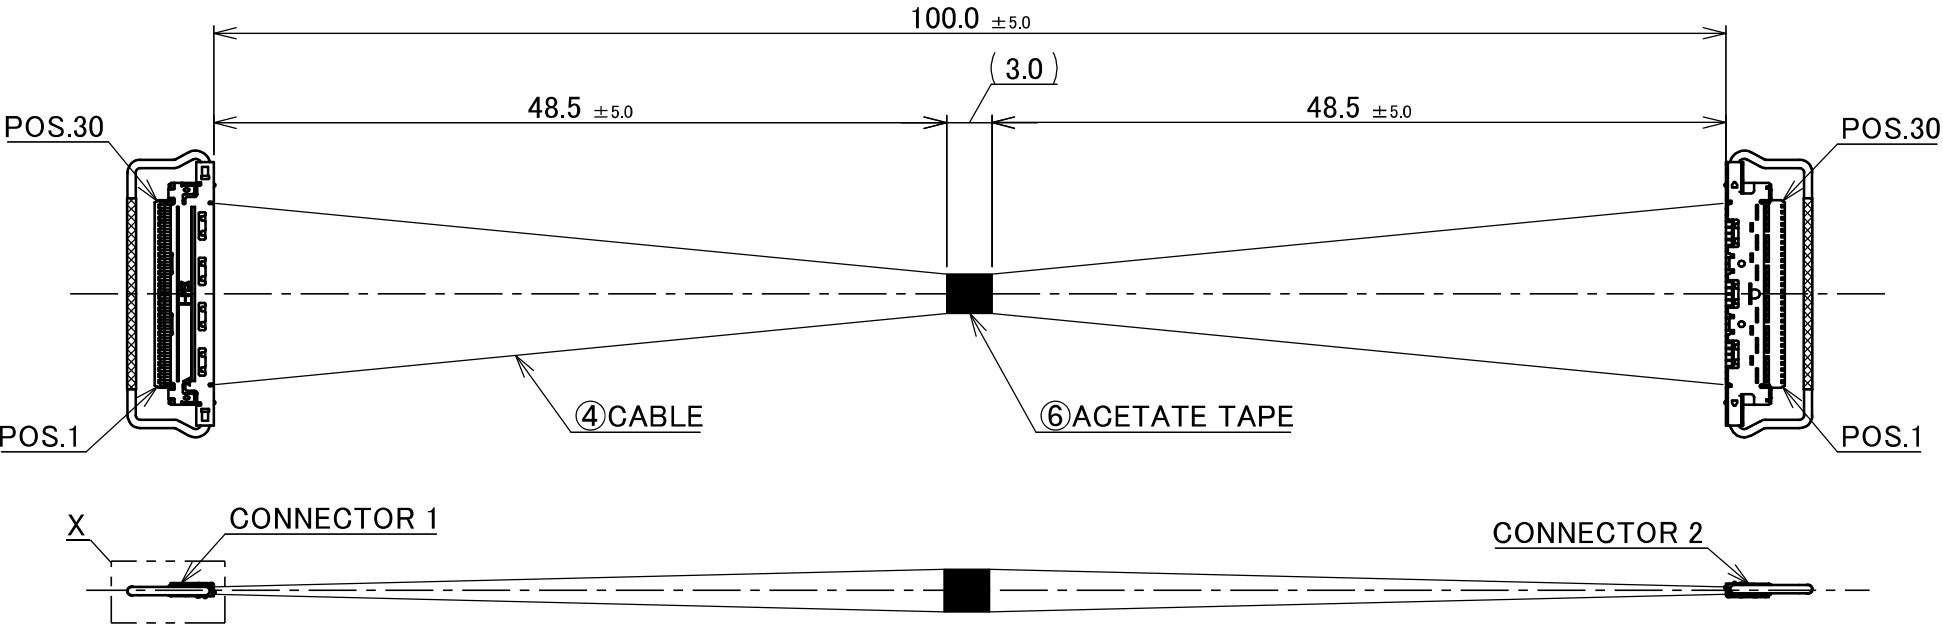
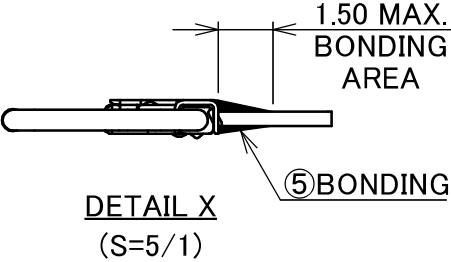


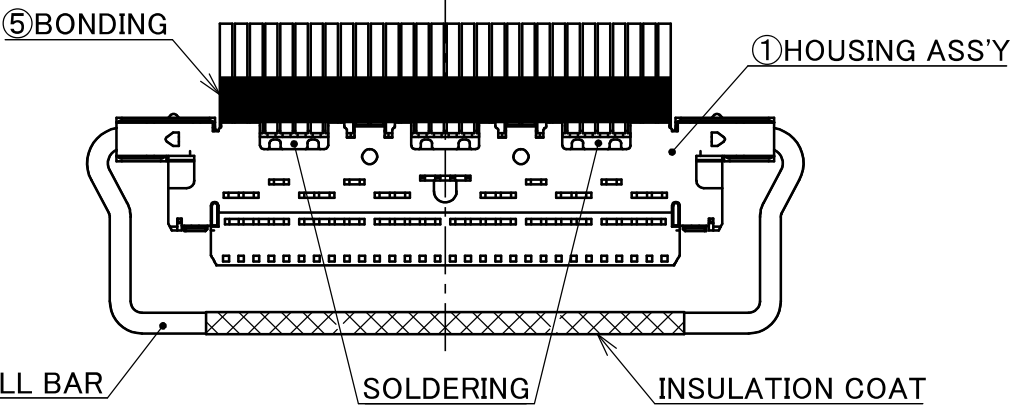

CONNECTOR 1&2
(S=5/1)

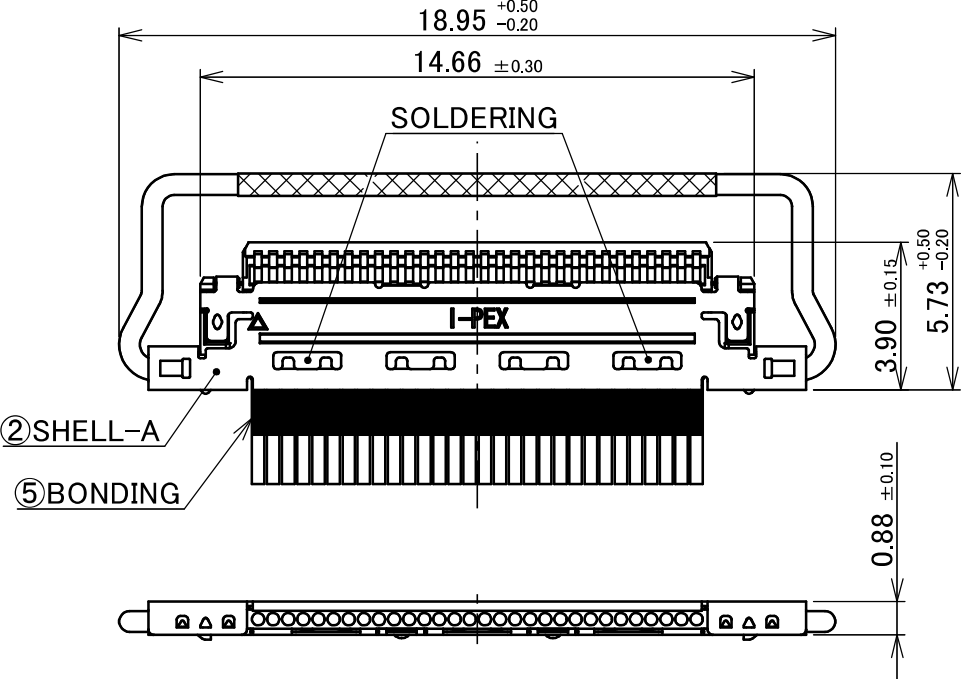

- NOTE.
1. TO HANDLE THIS CONNECTOR
YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW.
I-PEX INSTRUCTION MANUAL No.HIM-09008.
 2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.
 4. RATING VOLTAGE : 30V

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
30	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	30
29	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	29
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1

6	ACETATE TAPE	-	1	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	30	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	PULL BAR	2766-0301	2	CONNECTOR 1&2
2	SHELL-A	2764-0301-002	2	CABLINE®-CA PLUG P/N : 20633-230T-01S
1	HOUSING ASS'Y	20634-130T-02	2	CONNECTOR TO BE MATED : 20525-030E-02
NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
				ANGLE ±2° 6 OVER 30 MAX. ±0.3
				6 MAX. ±0.2 30 OVER 120 MAX. ±0.5
				GENERAL TOLERANCE.
				DWG. K.Fukutomi DATE 2025/12/16
				CHK. R.Takei
0	ZM00399	K.Fu	Dec./16/'25	-
REV.	ECN	BY	DATE	APP.
REVISION RECORD				H.Ikari
				PROJECTION
				SERIES No. IH-200016
				CUSTOMER COPY
				TITLE
				CABLINE®-CA 30P HARNESS
				SCALE
				2:1
				UNIT
				mm
				I-PEX
				SIZE
				A3
				SHEET
				1/1
				REV.
				0