

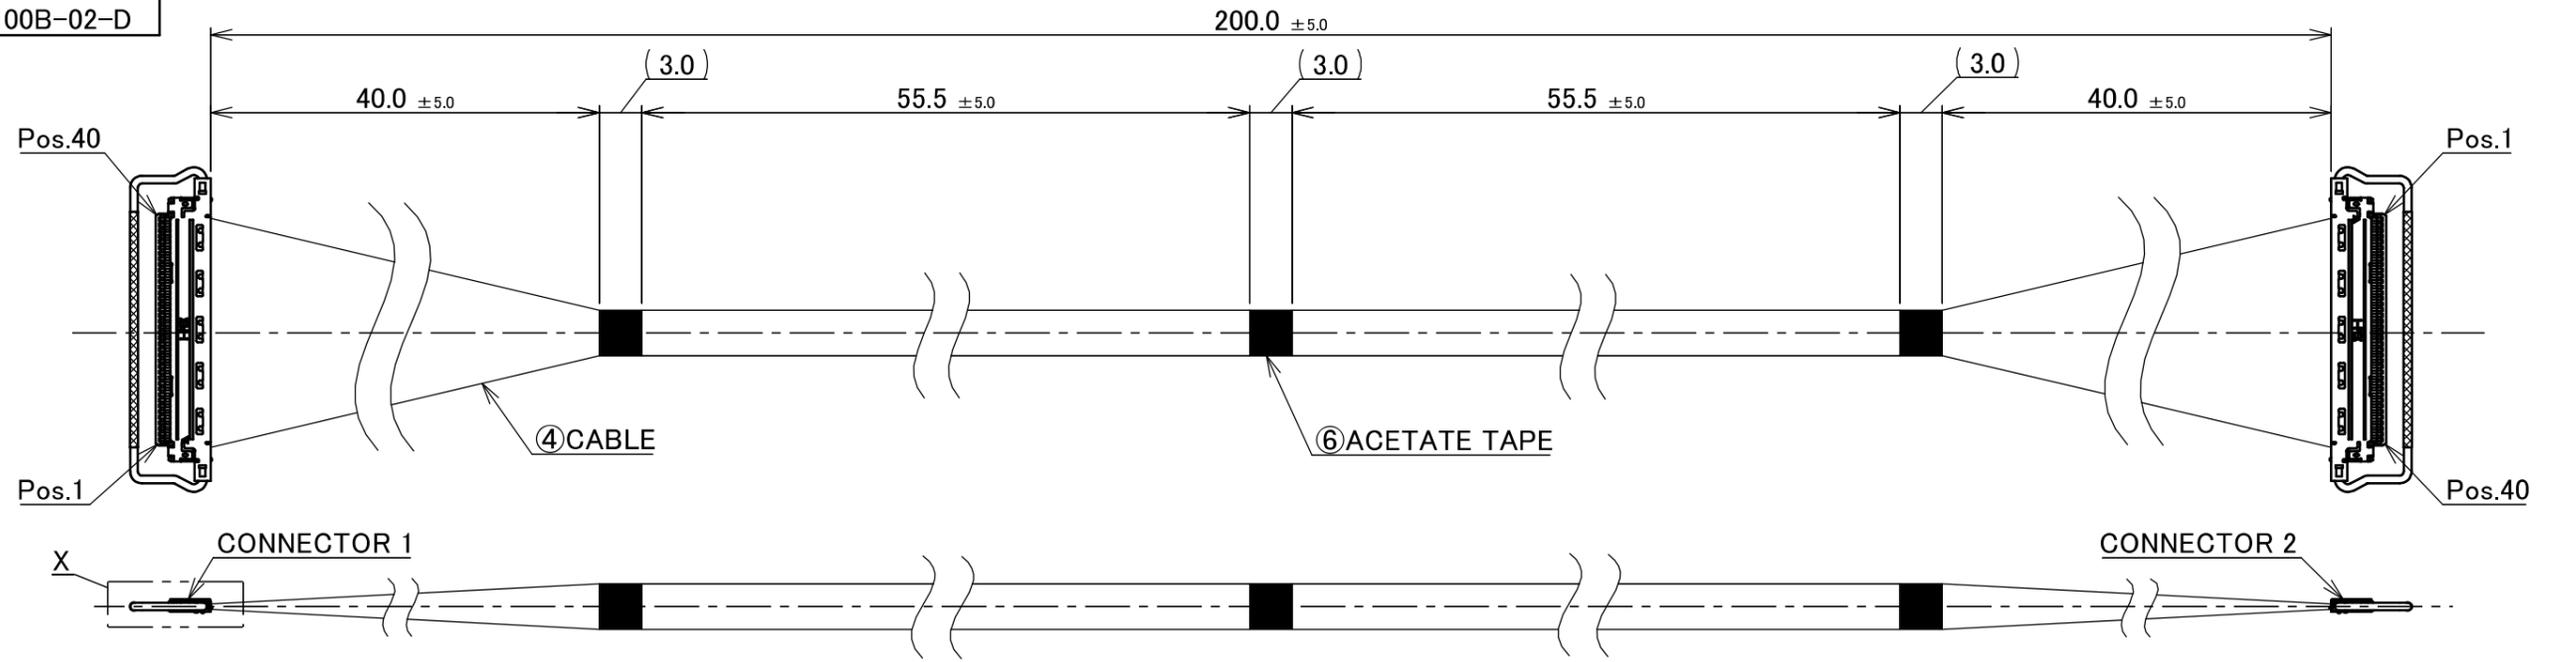


PART No.
81424-100B-02-D

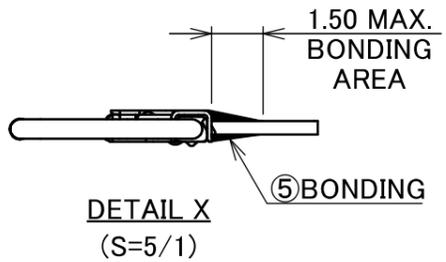

CONNECTOR 1&2
(S=5/1)

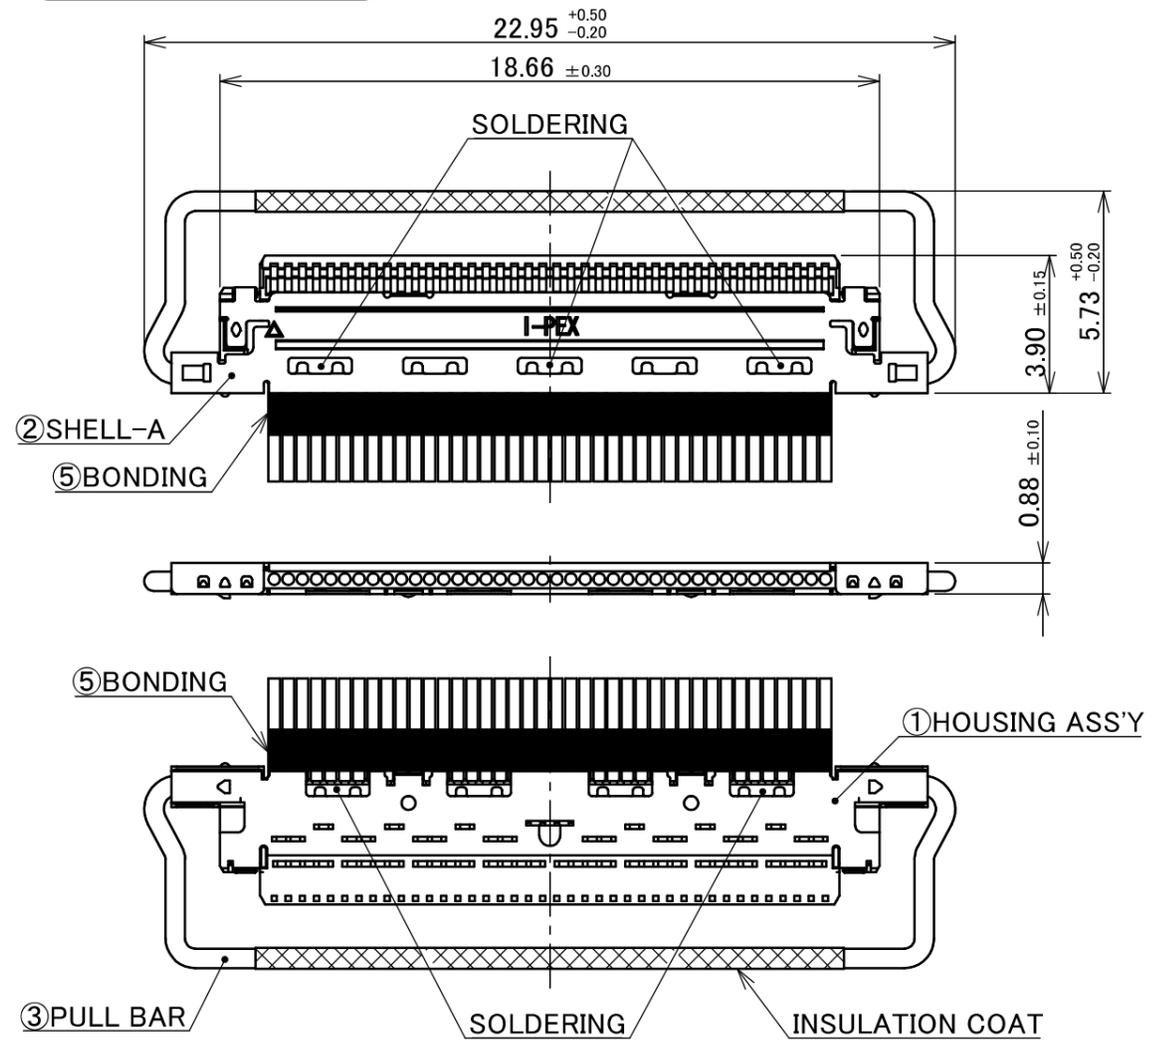

NOTE.

- TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-09008.
- ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
- THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.
- RATING VOLTAGE : 30V

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
40	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
39	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	39
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	40

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
6	ACETATE TAPE	-	3	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	40	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	PULL BAR	2766-0401	2	CONNECTOR 1&2
2	SHELL-A	2764-0401-002	2	CABLIN [®] -CA PLUG P/N : 20633-240T-01S CONNECTOR TO BE MATED : 20525-040E-02
1	HOUSING ASS'Y	20634-140T-02	2	

REV.	ECN	BY	DATE	APP.	ANGLE	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.	CUSTOMER COPY
					±2°	6 OVER 30 MAX.	±0.3		IH-200016	CUSTOMER COPY
					6 MAX.	30 OVER 120 MAX.	±0.5			
REVISION RECORD					GENERAL TOLERANCE.		TITLE		SCALE	
					DWG. K.Baba		CABLIN [®] -CA 40P HARNESS		2:1	
					DATE 2020/05/11		DWG. No. 81424		UNIT mm	
					CHK. R.Takei		SIZE A3		SHEET 1/1	
					APP. H.Ikari		REV. 4			