

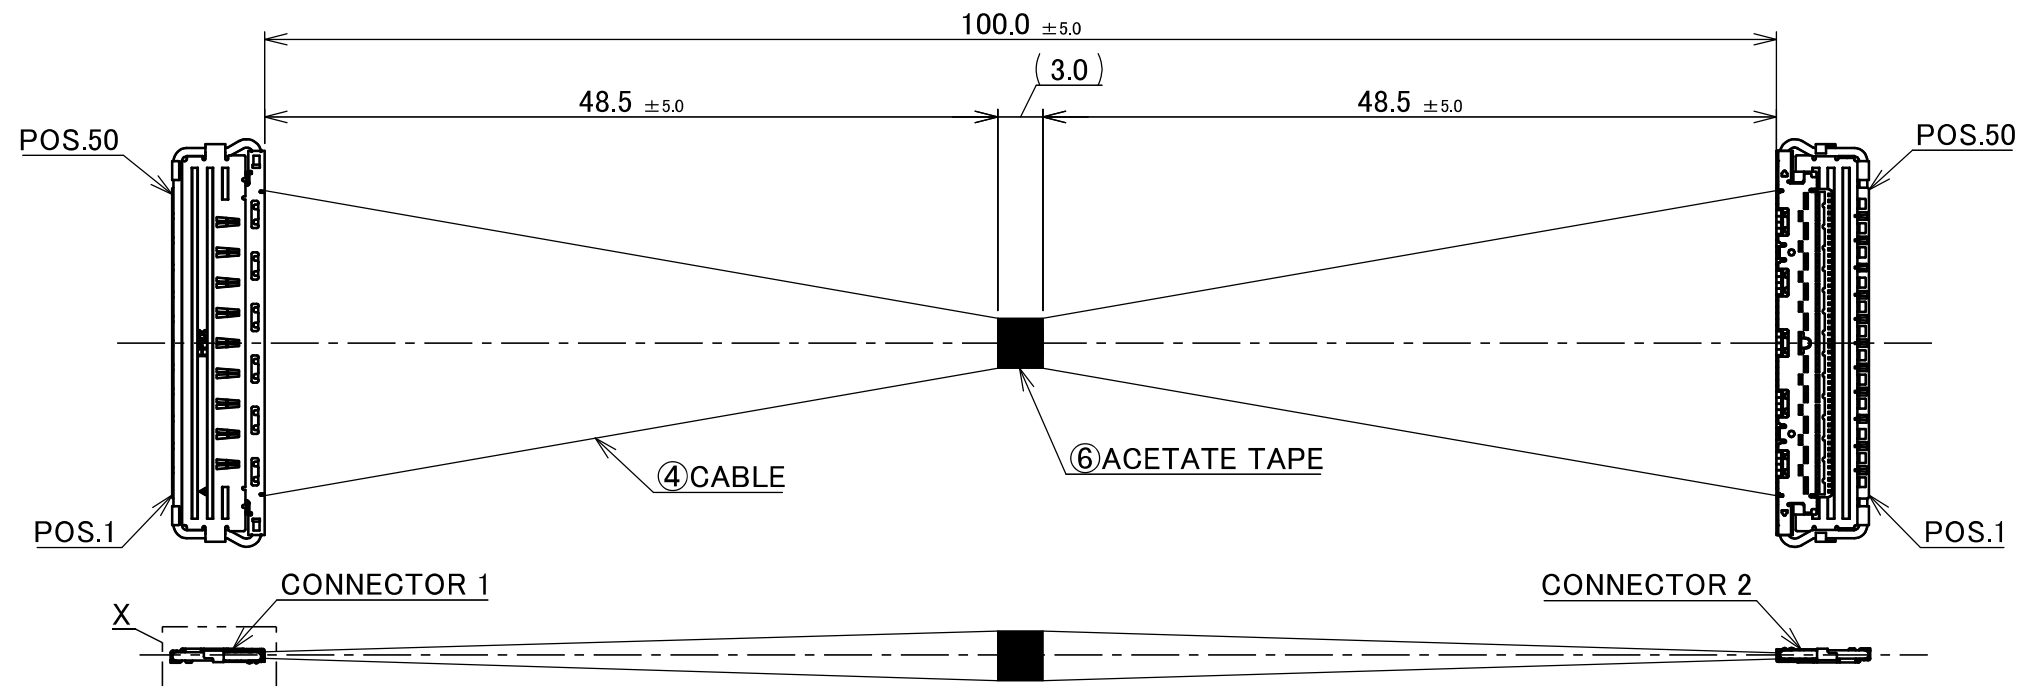


PART No.
82992-100B-01-D

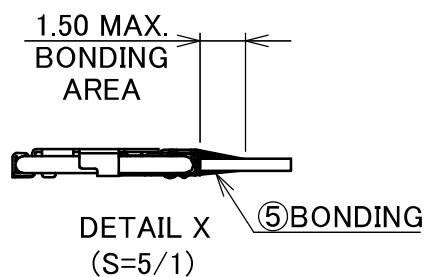

CONNECTOR 1&2
(S=5/1)

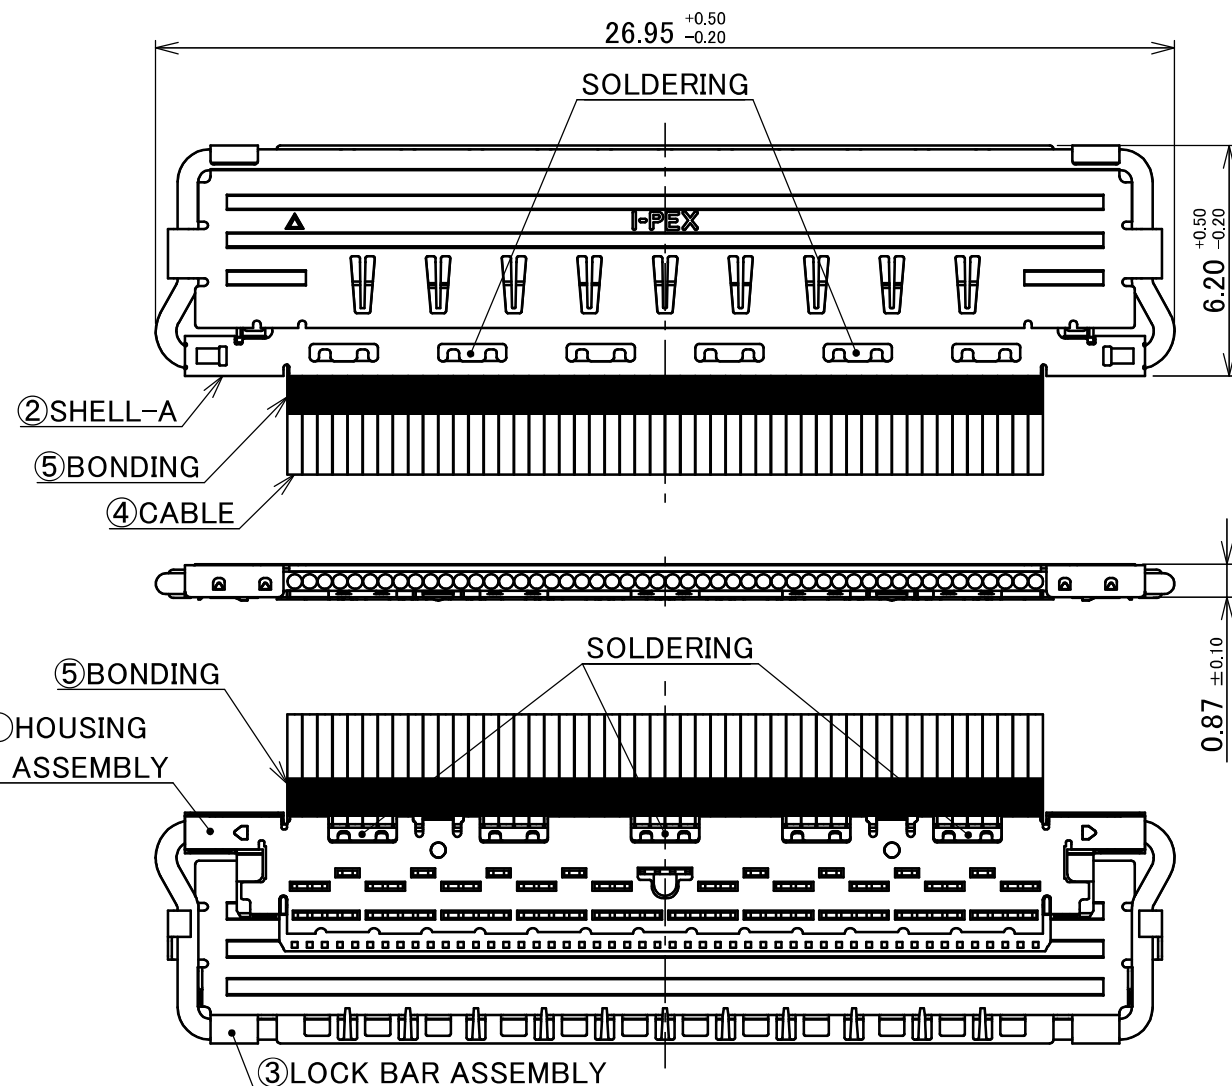

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
50	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	50
49	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	49
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1

- NOTE.
1. TO HANDLE THIS CONNECTOR
YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW.
I-PEX INSTRUCTION MANUAL No.HIM-15033.
 2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.
 4. RATING VOLTAGE : 30V

6	ACETATE TAPE	-	1	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	50	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	LOCK BAR ASSEMBLY	20681-050T-01	2	CONNECTOR 1 & 2 CABLINE-CA II PLUG P/N : 20679-050T-01 CONNECTOR TO BE MATED : 20682-050E-02
2	SHELL-A	3204-0501	2	
1	HOUSING ASSEMBLY	20680-050T-01	2	
NO.	DESCRIPTION	PARTS NO.	QTY	REMARK
		ANGLE	±2°	6 OVER 30 MAX. ±0.3
		6 MAX.	±0.2	30 OVER 120 MAX. ±0.5
		GENERAL TOLERANCE.		PROJECTION
		DWG.	DATE	TITLE CABLINE®-CA II 50P HARNESS
1	ZM01103	K.B	2026/07/23	
0	ZM00907	K.Fu	2026/05/27	
REV.	ECN	BY	DATE	APP.
REVISION RECORD				
T.Masunaga				
DWG. No.				82992
SCALE				2:1
UNIT				mm
SIZE				A3
SHEET				1/1
REV.				1
CUSTOMER COPY				I-PEX