

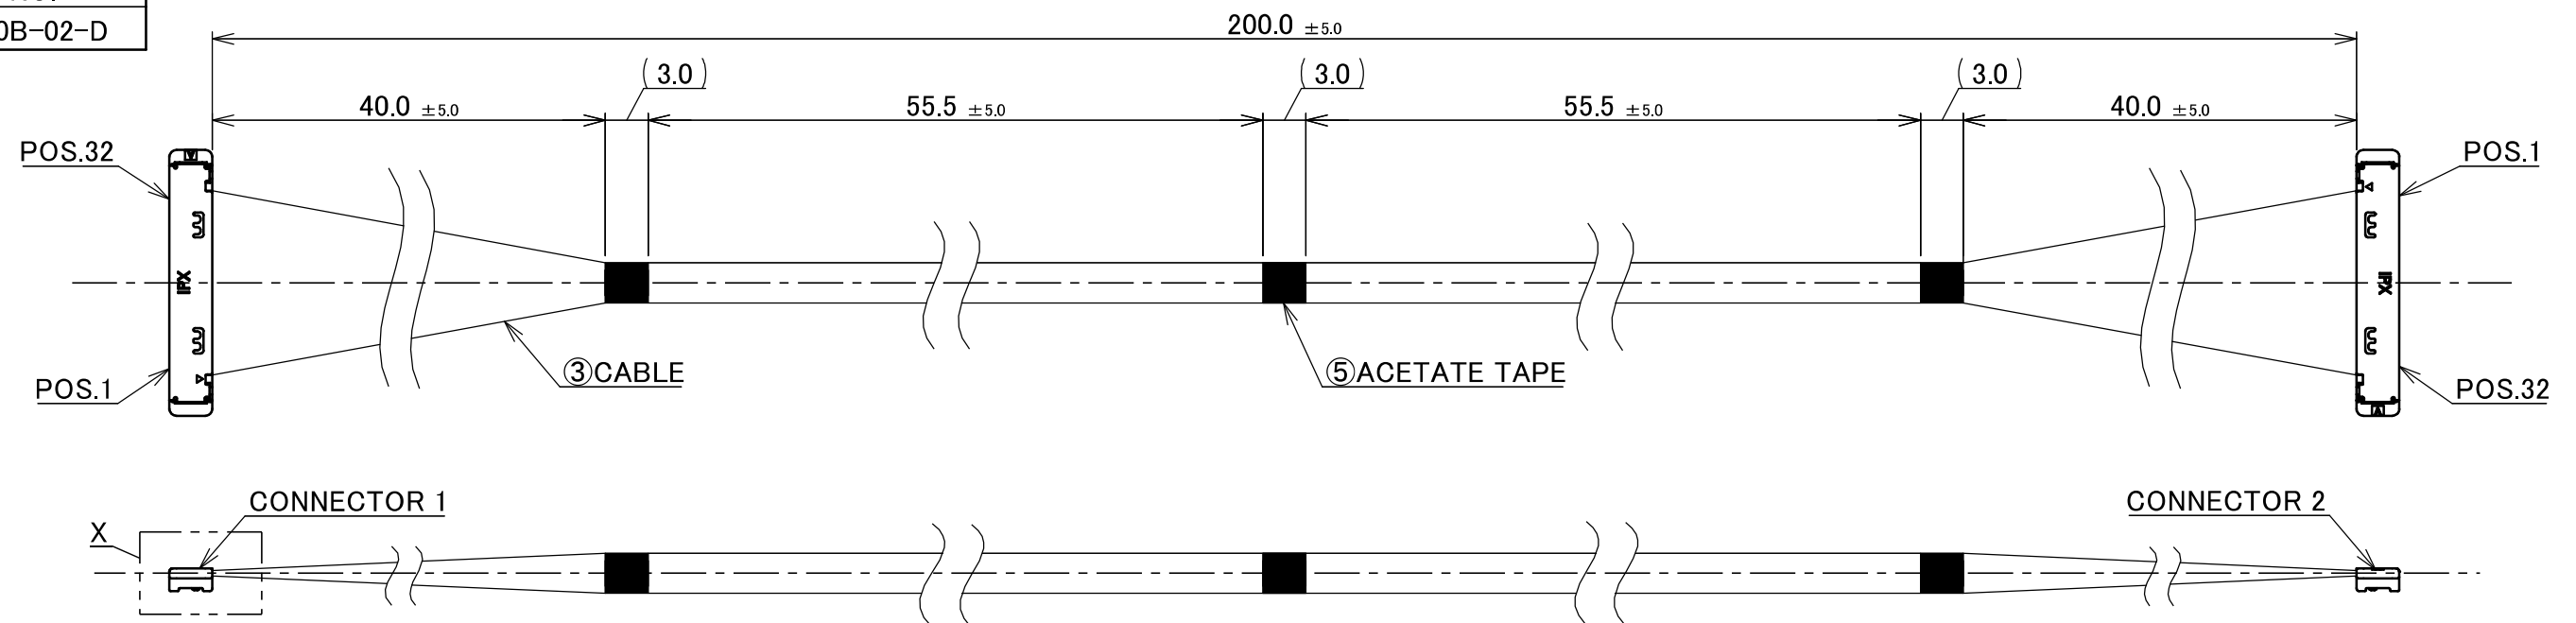


PART NO.
82442-100B-02-D

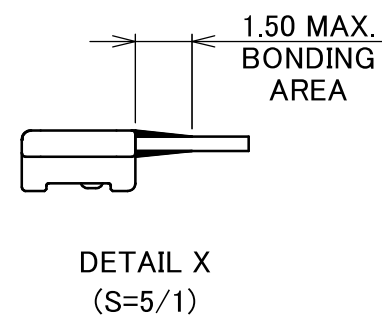

CONNECTOR 1&2
(S=5/1)

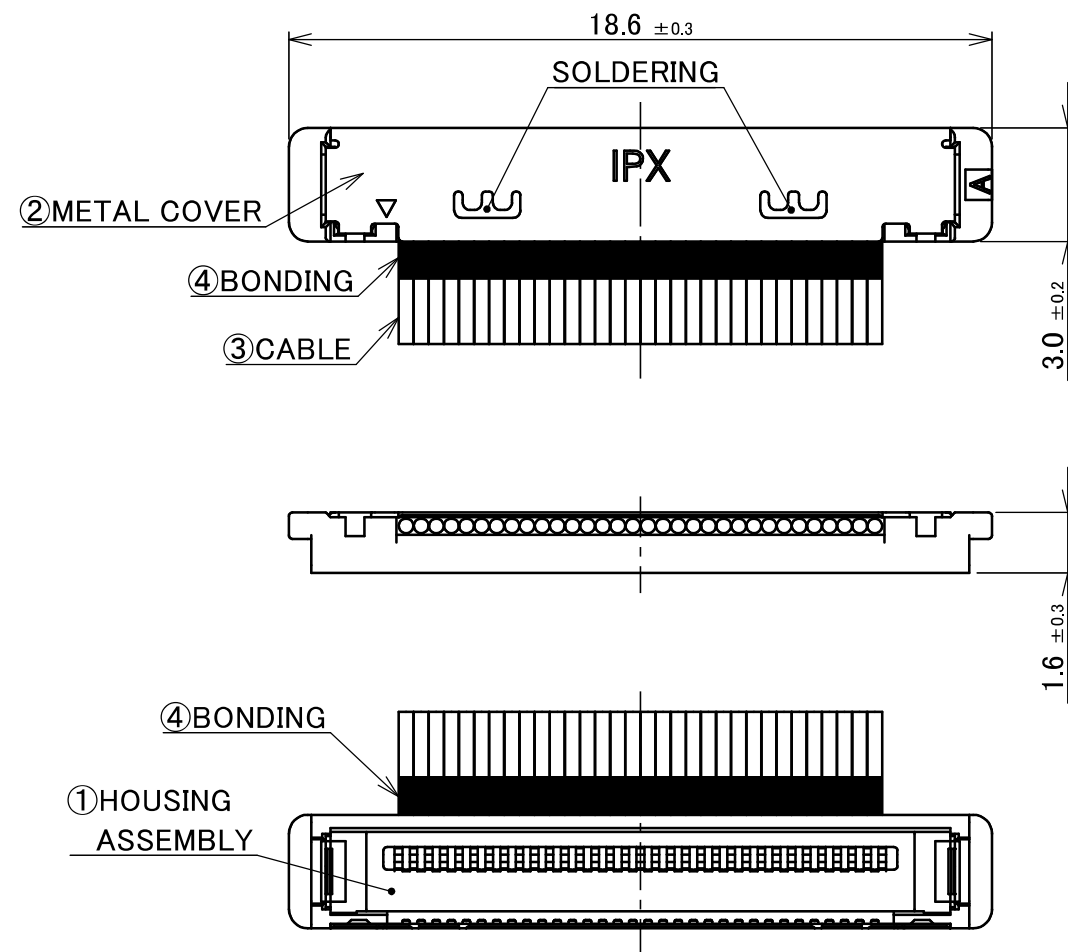


PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
32	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
31	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
• • •	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	• • •
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	31
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	32

NOTE.

- 1. TO HANDLE THIS CONNECTOR**
YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW.
I-PEX INSTRUCTION MANUAL No.HIM-04001.
- 2. ELECTRIC CHARACTERISTICS**
WITHSTAND VOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50M Ω MIN. DC 100V
- 3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.**
- 4. RATING VOLTAGE : 30V**

5	ACETATE TAPE	—	3	BLACK
4	BONDING	—	—	UV GLUE
3	CABLE	—	32	MICRO-COAXIAL CABLE AWG #40, 50 OHM, BLUE
2	METAL COVER	2182-032-03	2	CONNECTOR 1&2 CABLINE®-SS PLUG P/N : 20380-R32T-06 CONNECTOR TO BE MATED : 20374-R32E-31
1	HOUSING ASSEMBLY	20373-R32T-06	2	
NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
0	Z250808	K.B	May/22/'25	—
REV.	ECN	BY	DATE	APP.
REVISION RECORD				

ANGLE	±2°	6 OVER 30 MAX.	±0.3		SERIES No. IH-200016	CUSTOMER COPY		
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5					
GENERAL TOLERANCE.				TITLE CABLINE®-SS 32P HARNESS	SCALE 2:1 UNIT mm			
DWG.	DATE							
K.Baba			2025/05/22					
CHK.	R.Takei							
APP.	H.Ikari			DWG. No.	82442	SIZE	SHEET	REV.
						A3	1/1	0