

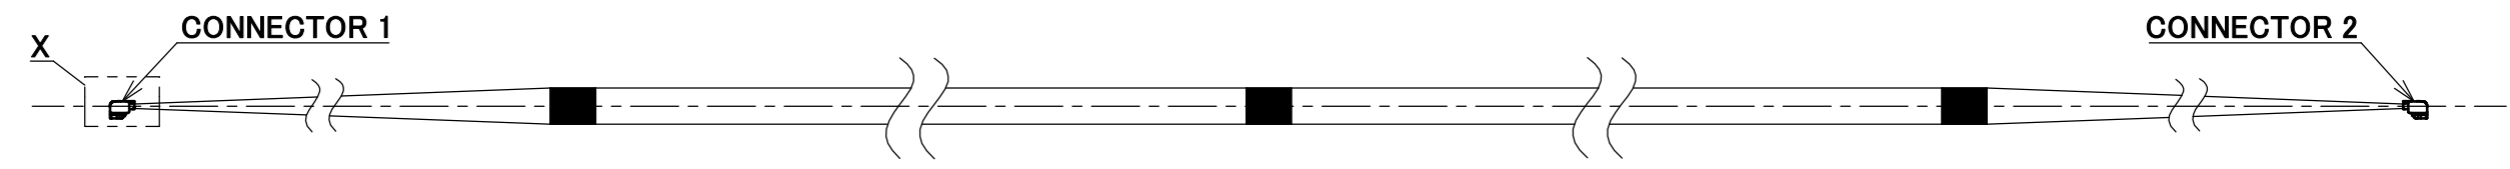
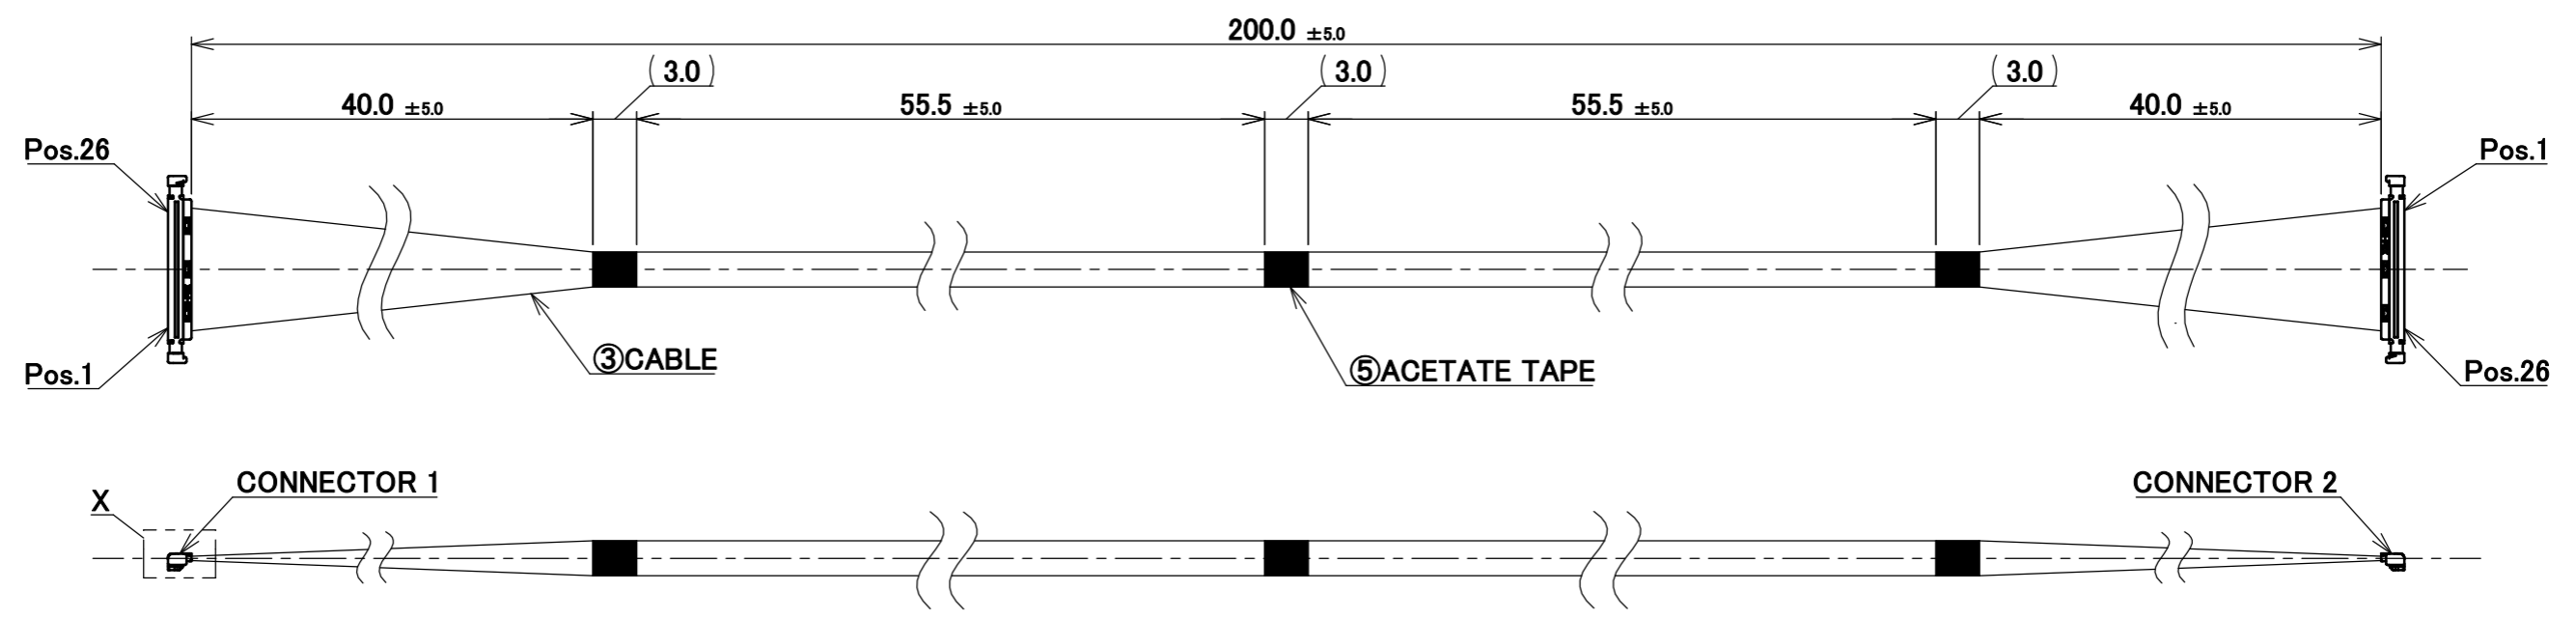


PART No.
82068-100B-02-D

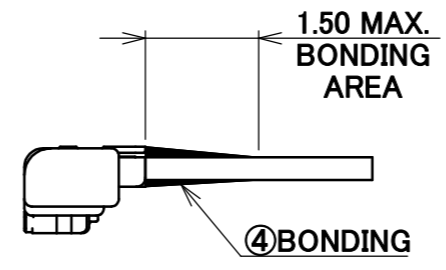


- NOTE.
1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-09006.
 2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 100V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.

CONNECTOR 1&2
(S=5/1)

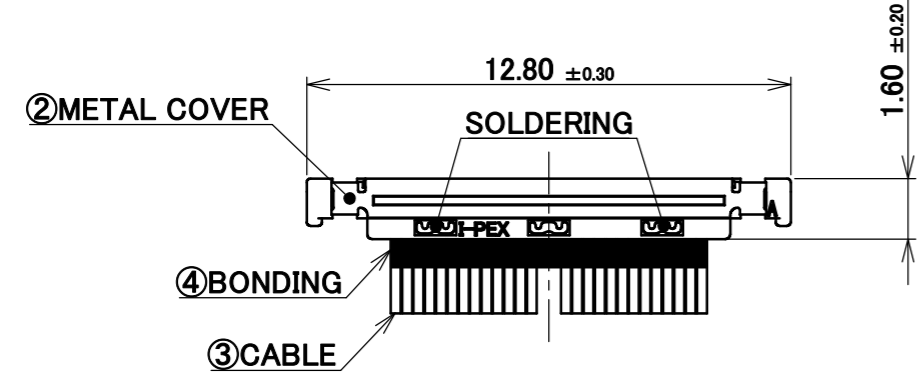

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
26	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	1
25	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	.
.	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	.
.	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	25
1	MICRO-COAXIAL CABLE AWG#44 50 OHM, BLUE	26

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
5	ACETATE TAPE	-	3	BLACK
4	BONDING	-	-	UV GLUE
3	CABLE	-	26	MICRO-COAXIAL CABLE AWG #44, 50 OHM, BLUE
2	METAL COVER	2679-026-10	2	CONNECTOR 1&2 CABLIN [®] -UA II PLUG P/N : 20496-026-40 CONNECTOR TO BE MATED : 20498-026E-41
1	HOUSING ASS'Y	20497-026T-30	2	

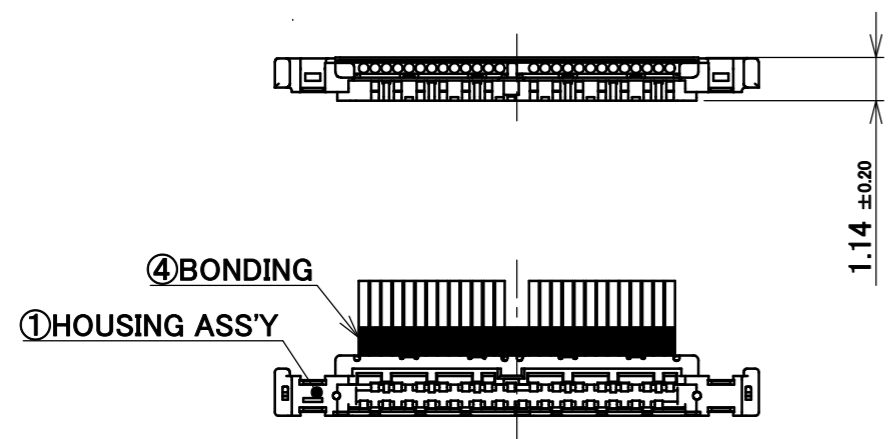

ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.	CUSTOMER COPY
	6 MAX.	±0.2	30 OVER 120 MAX.	±0.5	IH-200016	
GENERAL TOLERANCE.				TITLE	SCALE	I-PEX
				CABLIN [®] -UA II 26P	2:1	
				HARNESS	UNIT	
0	Z240350	K.B	Mar./21/'24	CHK.	mm	
REV.	ECN	BY	DATE	APP.	SIZE	SHEET
REVISION RECORD				H.Ikari	DWG. No.	REV.
					82068	1/1
						0

Confidential C

I-PEX Inc.

QKE-DFE06-02 REV.12