
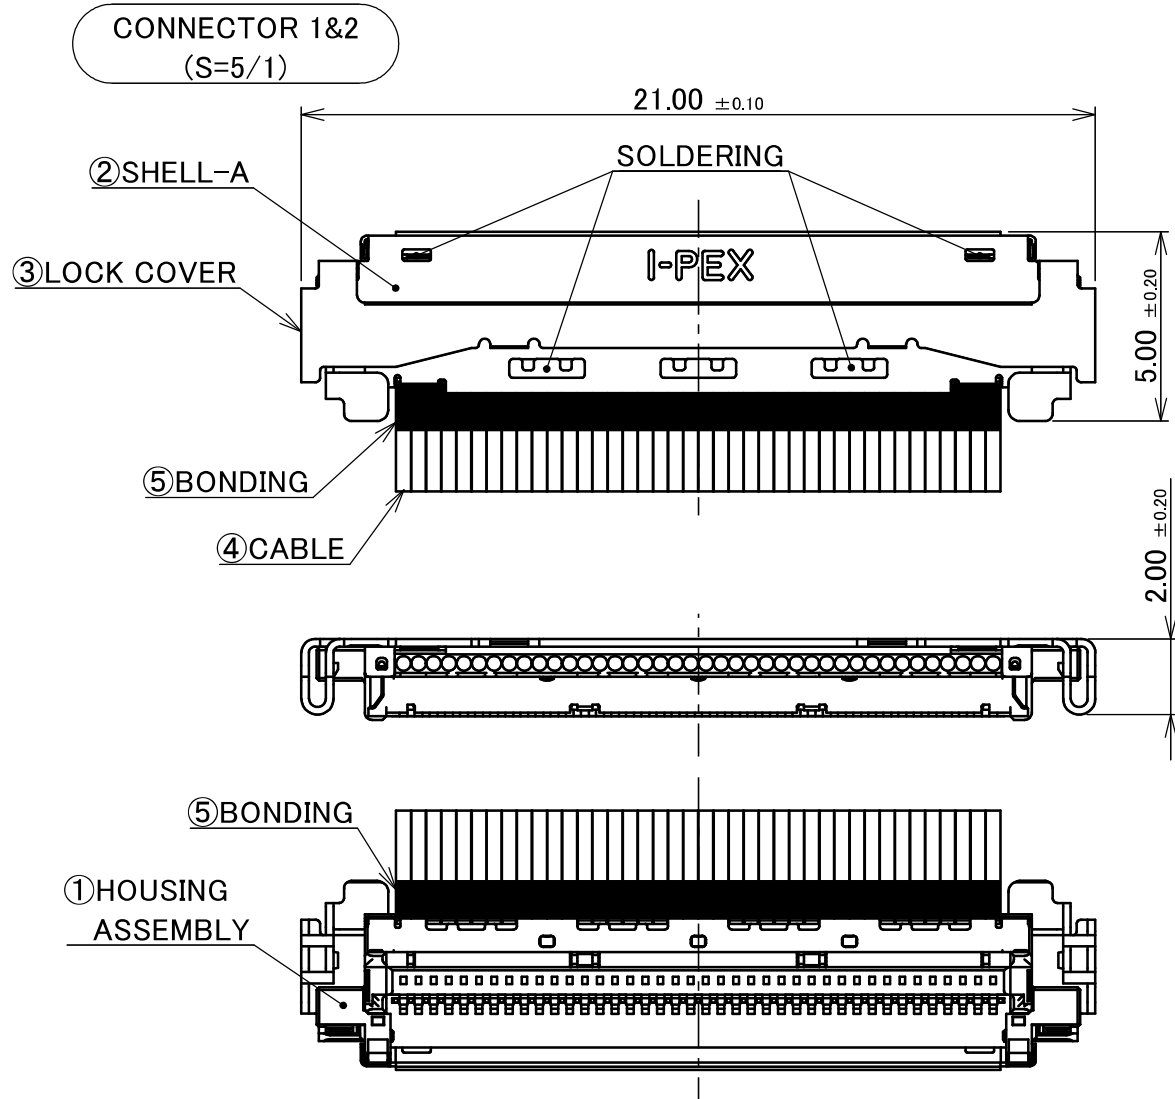


PART No.
82451-100B-02-D

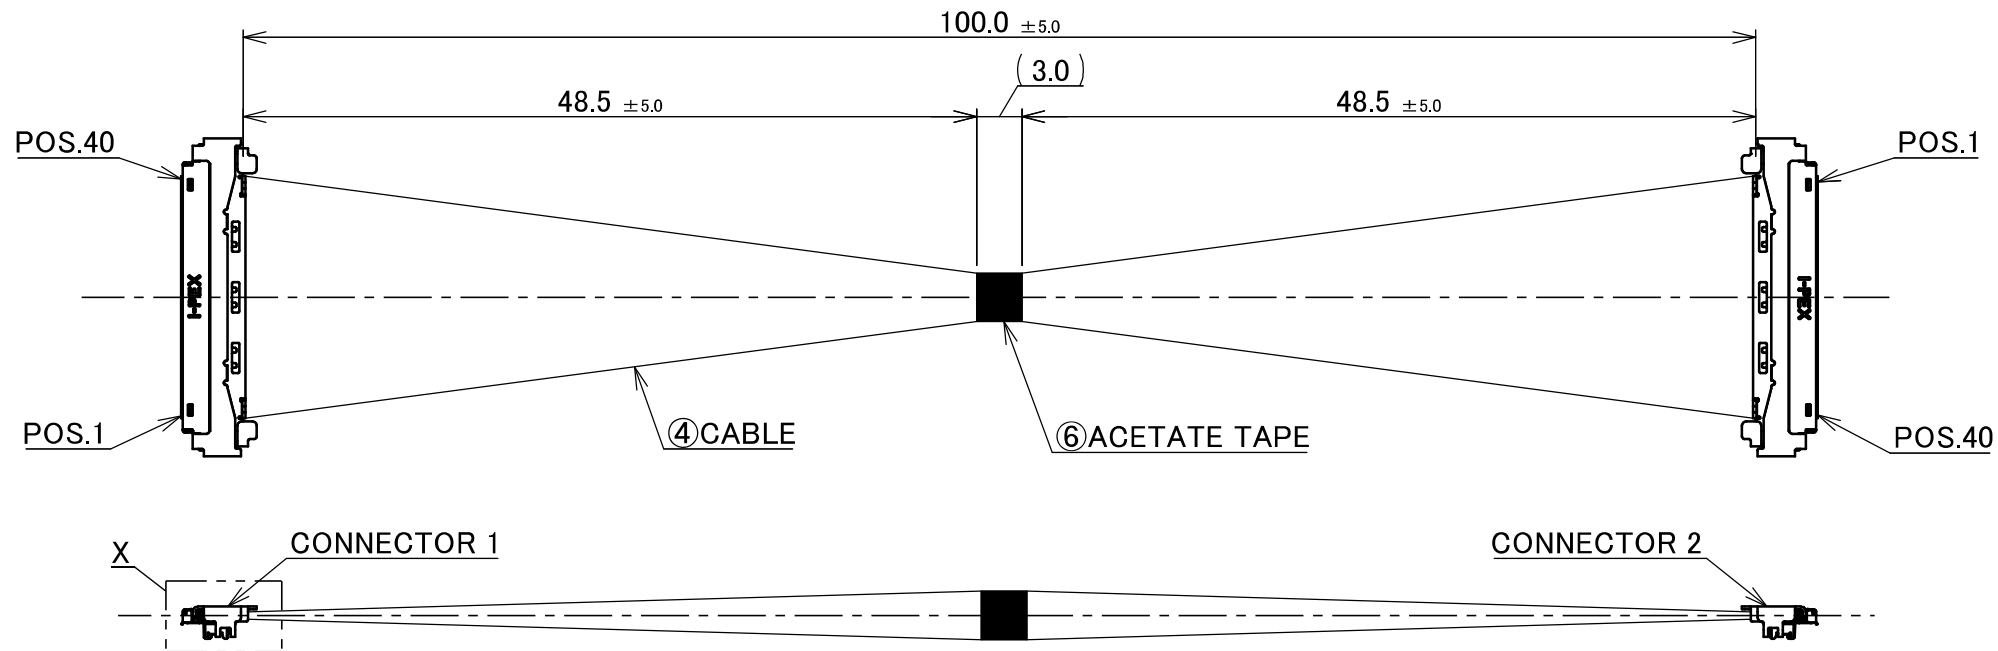

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
40	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	1
39	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	2
.	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	.
2	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	39
1	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE	40

- NOTE.
- 1.TO HANDLE THIS CONNECTOR
YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW.
I-PEX INSTRUCTION MANUAL No.HIM-18033.
 2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 3. THE OPERATING TEMPERATURE OF THE HARNESS : 80°C MAX.
 4. RATING VOLTAGE 30V

6	ACETATE TAPE	-	1	BLACK
5	BONDING	-	-	UV GLUE
4	CABLE	-	40	MICRO-COAXIAL CABLE AWG#40 50 OHM, BLUE
3	LOCK COVER	3493-0401	2	CONNECTOR 1&2 CABLINÉ®-UM PLUG P/N : 20877-040T-01 CONNECTOR TO BE MATED : 20879-040E-01
2	SHELL-A	3488-0401	2	
1	HOUSING ASSEMBLY	20878-040T-01	2	
NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
		ANGLE	±2°	6 OVER 30 MAX. ±0.3
			6 MAX. ±0.2	30 OVER 120 MAX. ±0.5
		GENERAL TOLERANCE.		PROJECTION SERIES No. IH-200016 TITLE CABLINÉ®-UM 40P HARNESS SCALE 2:1 UNIT mm SIZE A3 SHEET 1/1 REV. 0
		DWG.	K.Baba	
		DATE	2025/05/23	
		CHK.	R.Takei	
0	Z250810	K.B	May/23/'25	-
REV.	ECN	BY	DATE	APP.
REVISION RECORD				
		APP.	H.Ikari	DWG. No. 82451