

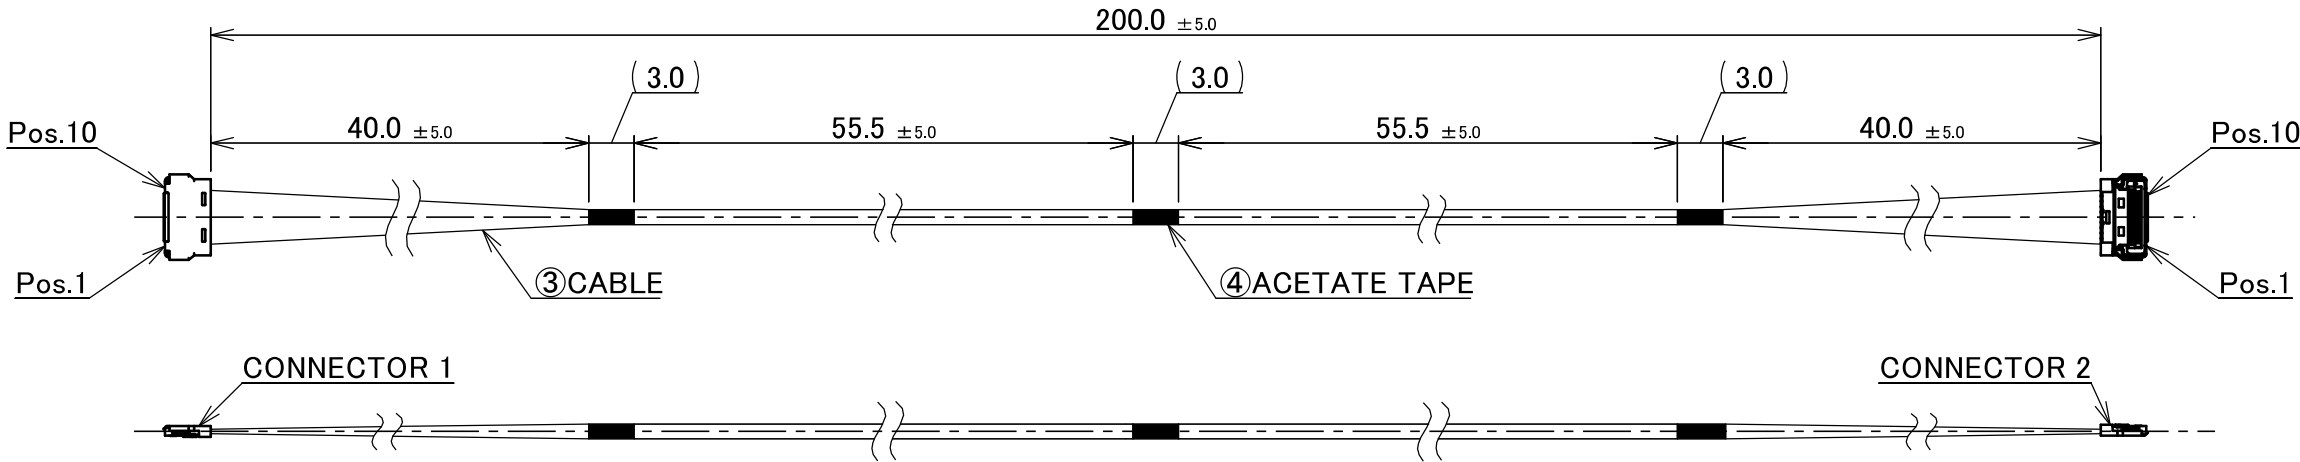
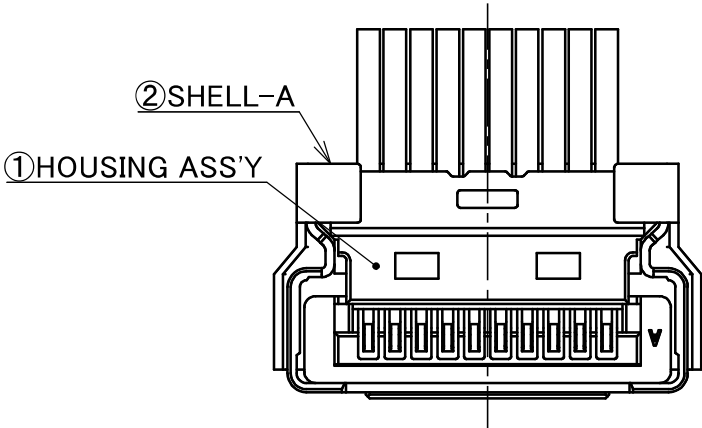


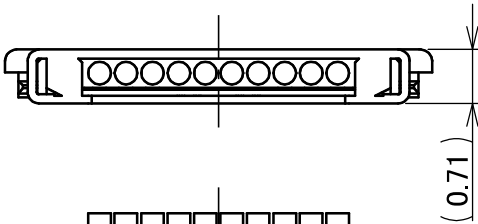

CONNECTOR 1&2
(S=10/1)

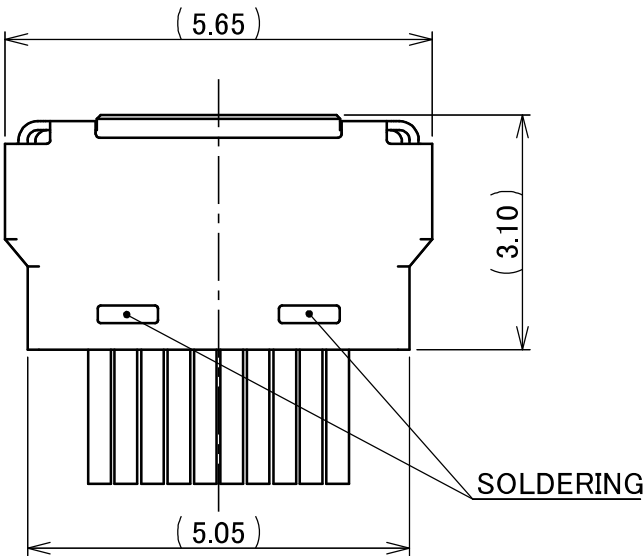

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
10	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE	10
9	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE	9
⋮	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE	⋮
2	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE	2
1	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE	1

- NOTE.
- 1. TO HANDLE THIS CONNECTOR
YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW.
I-PEX INSTRUCTION MANUAL No.HIM-18037.
 - 2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 200V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 - 3. THE OPERATING TEMPERATURE OF THE HARNESS : 80℃ MAX.
 - 4. RATING VOLTAGE : 30V

4	ACETATE TAPE	—	3	BLACK
3	CABLE	—	10	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE
2	SHELL-A	3568-0101	2	CONNECTOR 1&2 CABLINE®-UY PLUG P/N : 20857-010T-01 CONNECTOR TO BE MATED : 20854-010E-02
1	HOUSING ASS'Y	20907-010E-01	2	
NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
			ANGLE	±2° 6 OVER 30 MAX. ±0.3
			6 MAX. ±0.2	30 OVER 120 MAX. ±0.5
			GENERAL TOLERANCE.	
			DWG.	DATE
1	ZM00470	K.B	Jan./13/'26	T.M
0	ZM00409	K.Fu	Dec./18/'25	—
REV.	ECN	BY	DATE	APP.
REVISION RECORD				H.Ikari
			PROJECTION	SERIES No.
			⊕	IH-200016
			TITLE	SCALE
			CABLINE®-UY 10P HARNESS	2:1
				UNIT
				mm
			DWG. No.	SIZE
			82684	A3
				SHEET
				1/1
				REV.
				1