


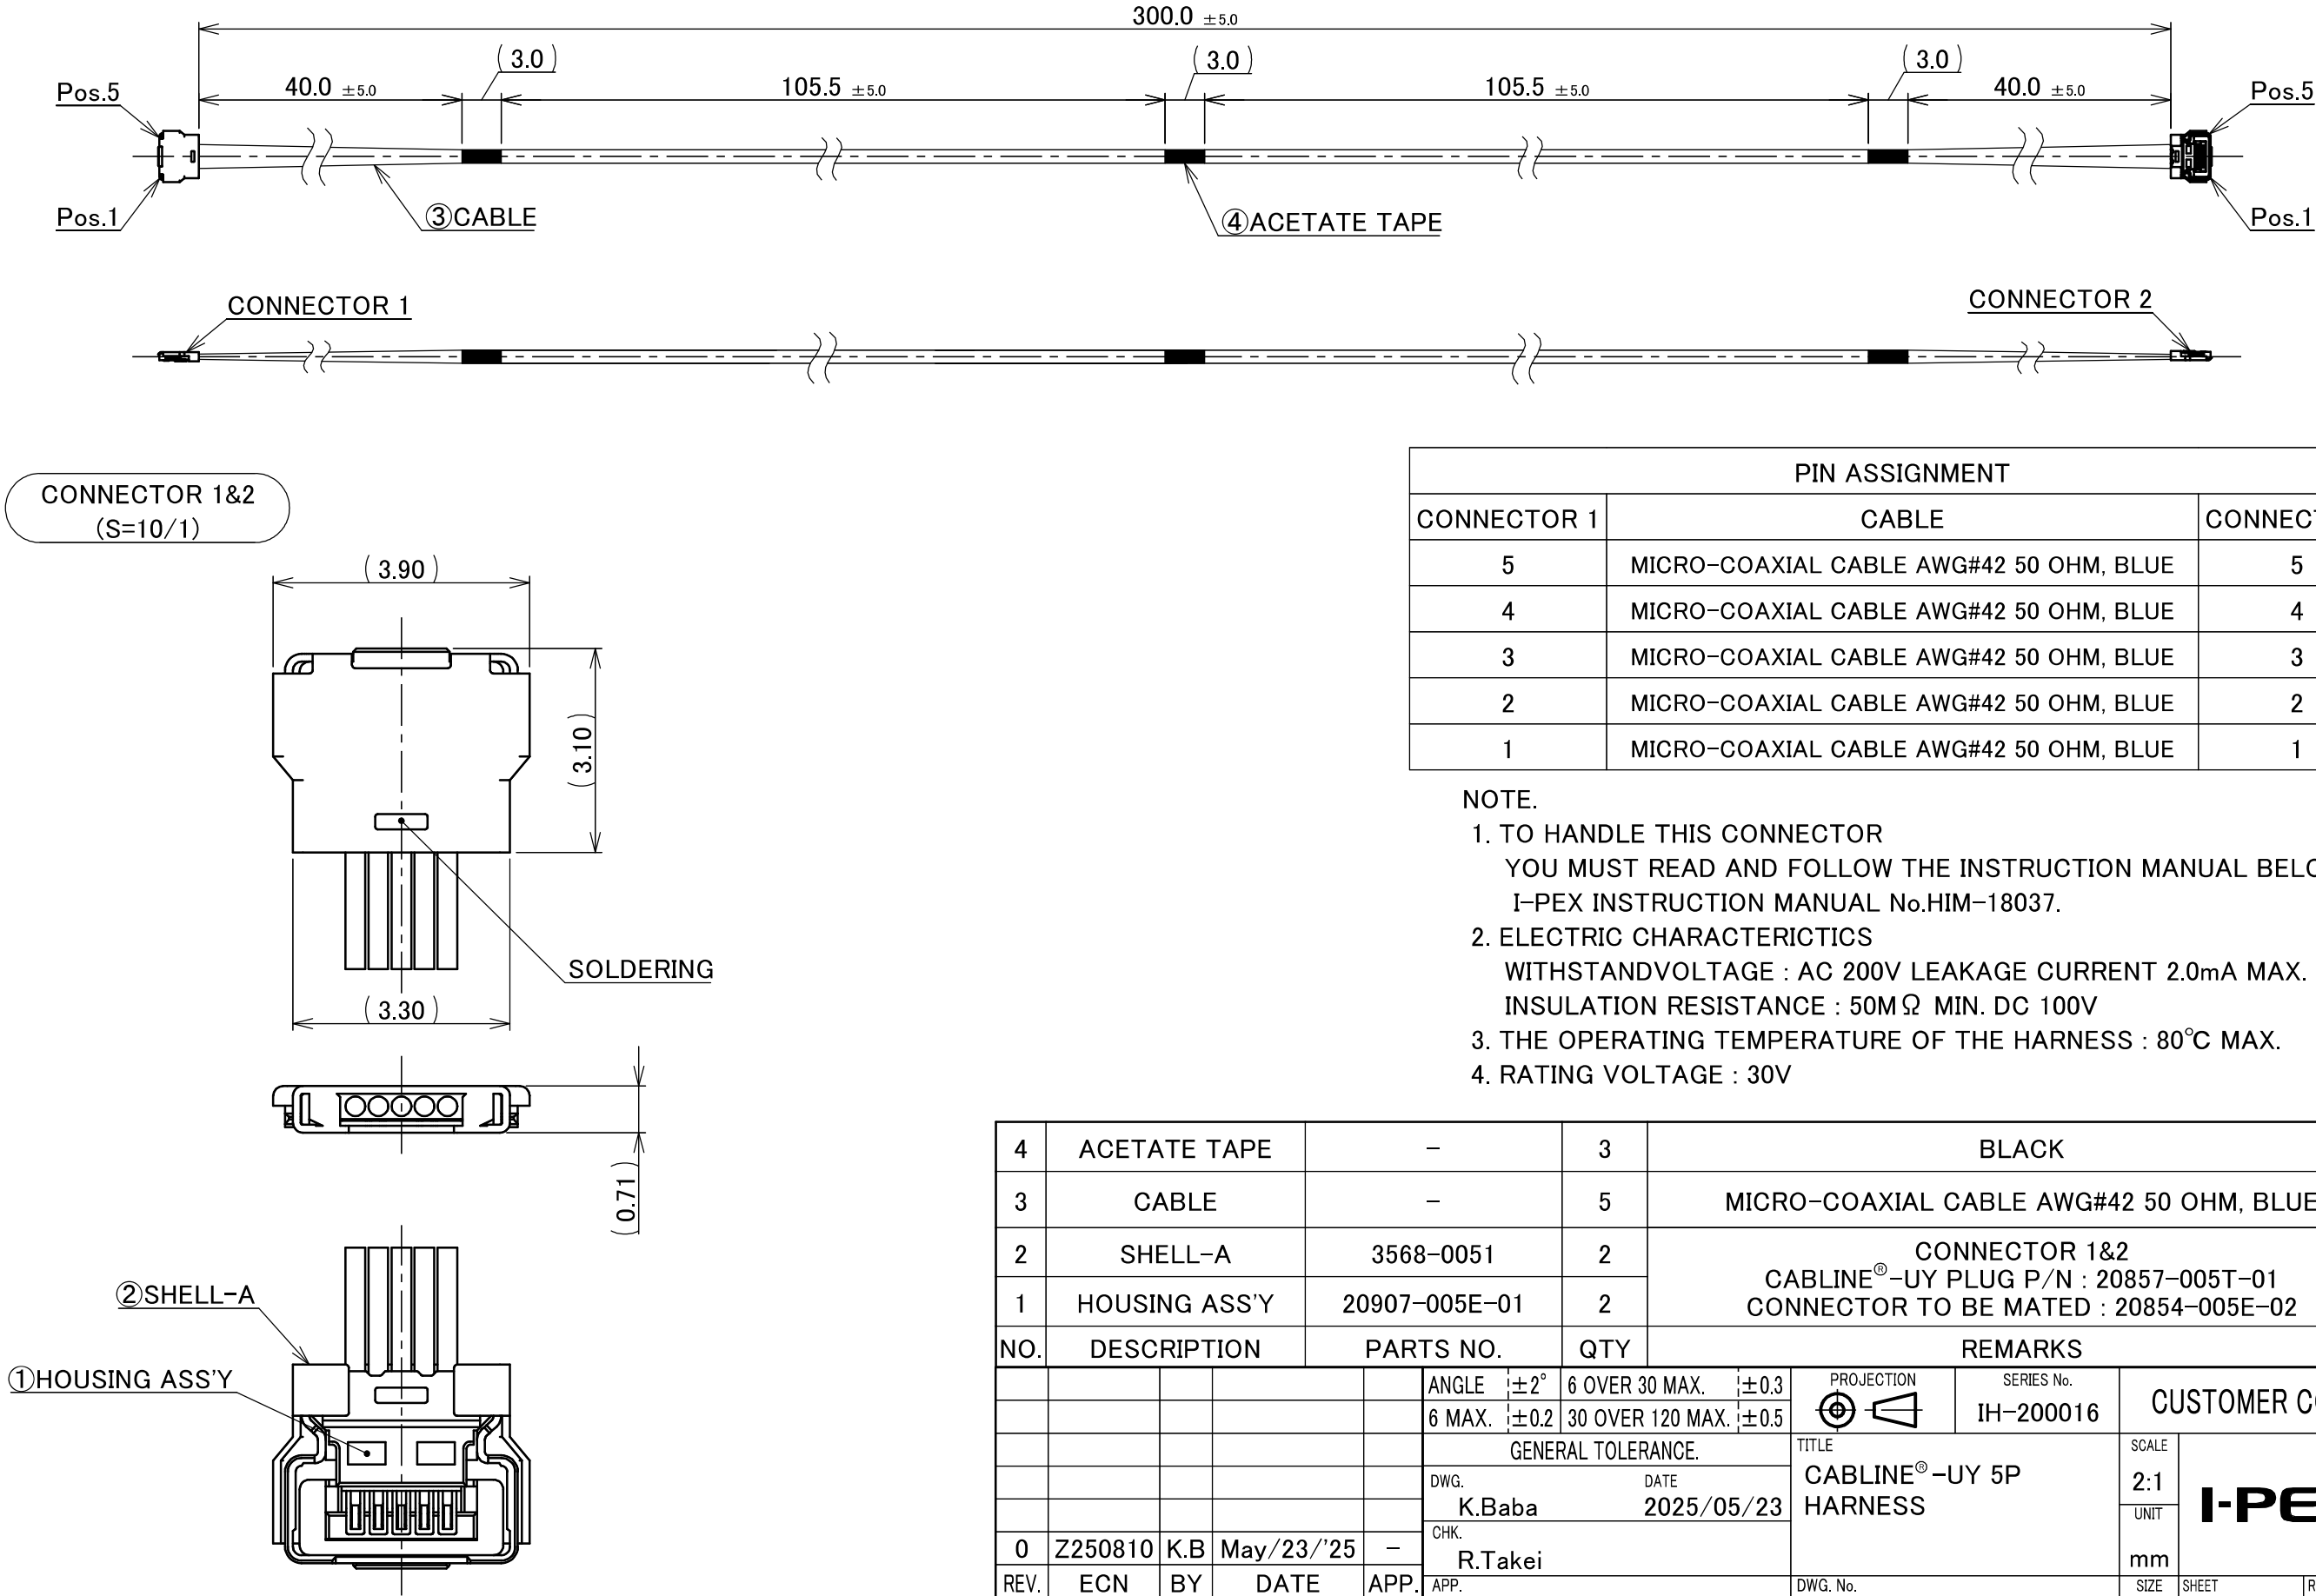

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
5	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE	5
4	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE	4
3	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE	3
2	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE	2
1	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE	1

- NOTE.
- TO HANDLE THIS CONNECTOR
YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW.
I-PEX INSTRUCTION MANUAL No.HIM-18037.
 - ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 200V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V
 - THE OPERATING TEMPERATURE OF THE HARNESS : 80℃ MAX.
 - RATING VOLTAGE : 30V

4	ACETATE TAPE	—	3	BLACK
3	CABLE	—	5	MICRO-COAXIAL CABLE AWG#42 50 OHM, BLUE
2	SHELL-A	3568-0051	2	CONNECTOR 1&2 CABLINE®-UY PLUG P/N : 20857-005T-01 CONNECTOR TO BE MATED : 20854-005E-02
1	HOUSING ASS'Y	20907-005E-01	2	
NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
			ANGLE	±2° 6 OVER 30 MAX. ±0.3
			6 MAX. ±0.2	30 OVER 120 MAX. ±0.5
			GENERAL TOLERANCE.	
			DWG.	DATE
			K.Baba	2025/05/23
			CHK.	R.Takei
0	Z250810	K.B	May/23/'25	—
REV.	ECN	BY	DATE	APP.
REVISION RECORD				H.Ikari
			PROJECTION	SERIES No.
			⊕	IH-200016
			TITLE	
			CABLINE®-UY 5P HARNESS	
			DWG. No.	82448
			SCALE	CUSTOMER COPY
			2:1	I-PEX
			UNIT	
			mm	
			SIZE	SHEET
			A3	1/1
			REV.	0