


PART No.	L
8-26-0083	200.00±1.0mm


PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.

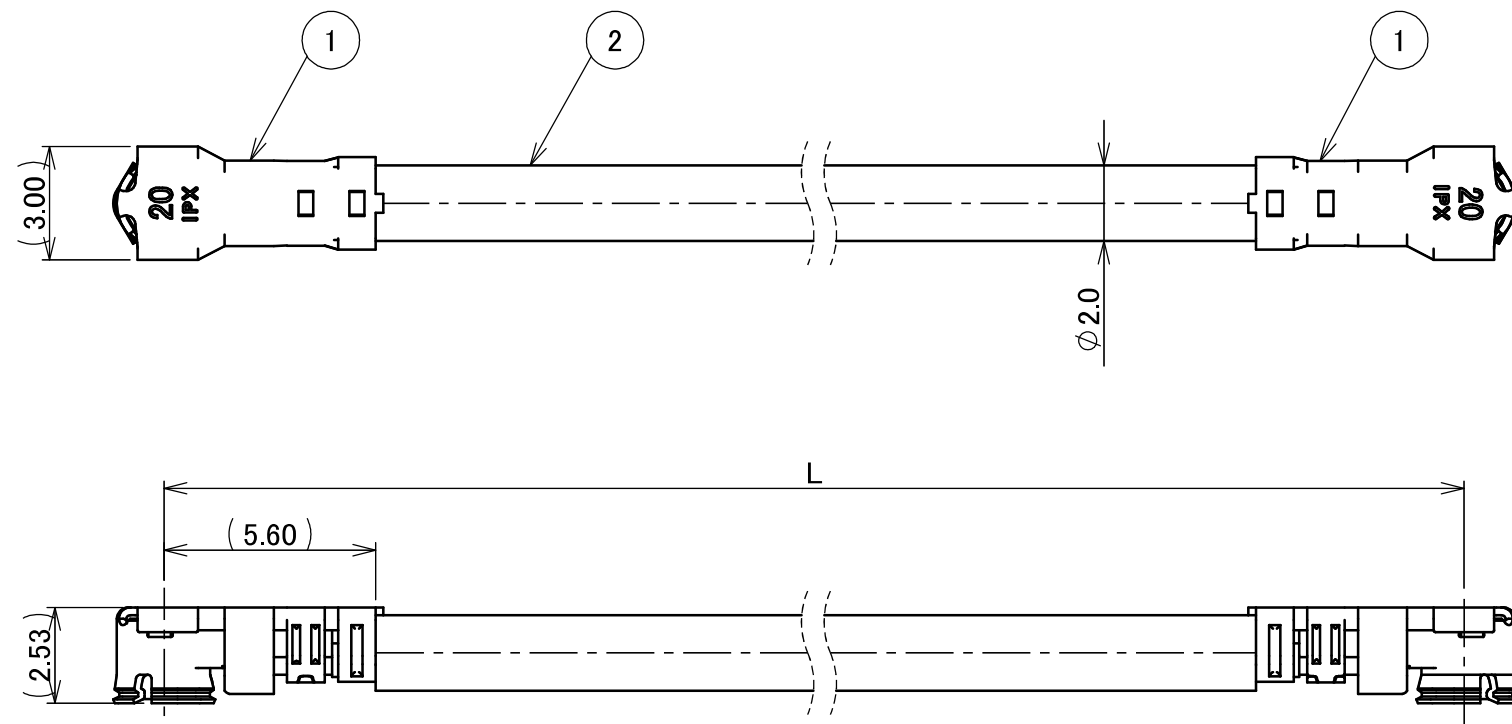


NOTES

1. SUGGESTIONS FOR MATING & UNMATING OPERATION.
 - 1-1. MATING


MATE THE CONNECTOR VERTICALLY,
ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE.
DO NOT SLANT MATE.
 - 1-2. UNMATING
 - 1-2-1.
UNMATING BY PULLING TOOL.
[P/N 90885-0001]
USE THE PULLING TOOL AS THE FOLLOWING, AND
PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

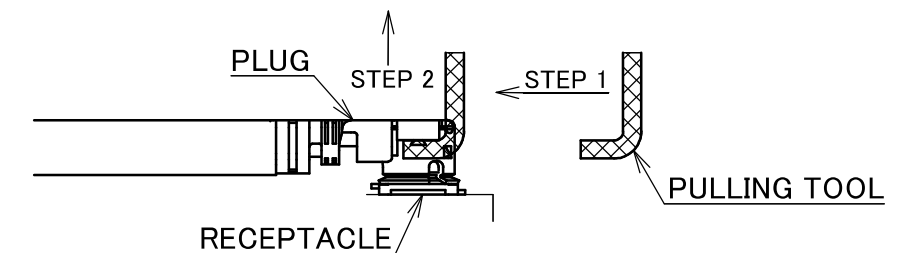



- 1-2-2.
UNMATING DIRECTLY BY HAND.
HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG
VERTICALLY.

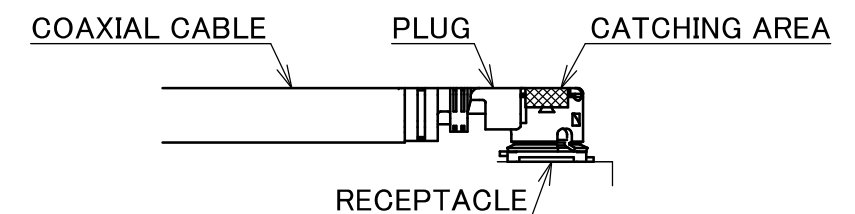

2. PACKING : PLASTIC BAG
3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING

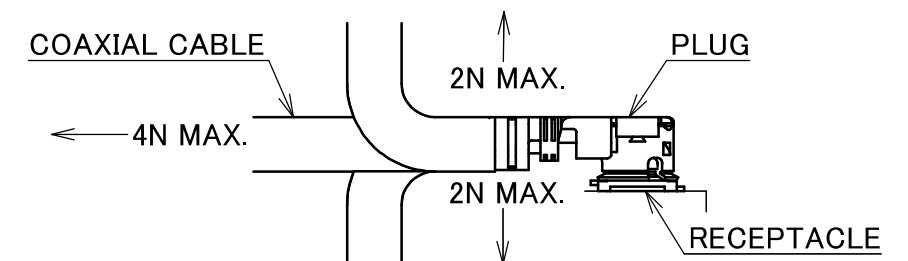

4. CABLE CRIMP STRENGTH : 15N MIN.
5. ORIENTATION OF CONNECTOR : $0^{\circ} \pm 45^{\circ}$

2	CABLE	1	AWG#26 Φ 2.0, BRAIDED SHIELD, BLACK				
1	CONNECTOR-1,2	2	MHF I Ni Top				
NO.	DESCRIPTION	QTY	REMARK				
ANGLE	±2°	6 OVER 30 MAX.	±0.3		SERIES No. H-250063B	CUSTOMER COPY	
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5				
GENERAL TOLERANCE.				 TITLE MHF® I-I CABLE2.0-1	SCALE		
DWG.	DATE		5:1				
M.Toida 2026/03/13			UNIT				
CHK.	T.Takuno		mm				
P.	APP.	DWG. No.			SIZE	SHEET	REV.
K.Yufu		8-26-0083			A3	1/1	0



Halogen Free



RoHS Compliant

Confidential C

I-PEX Inc.

QKE-DFFDE06-02 REV.12