


PART No.	L
8-26-0084	300.00±3.0mm

PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.


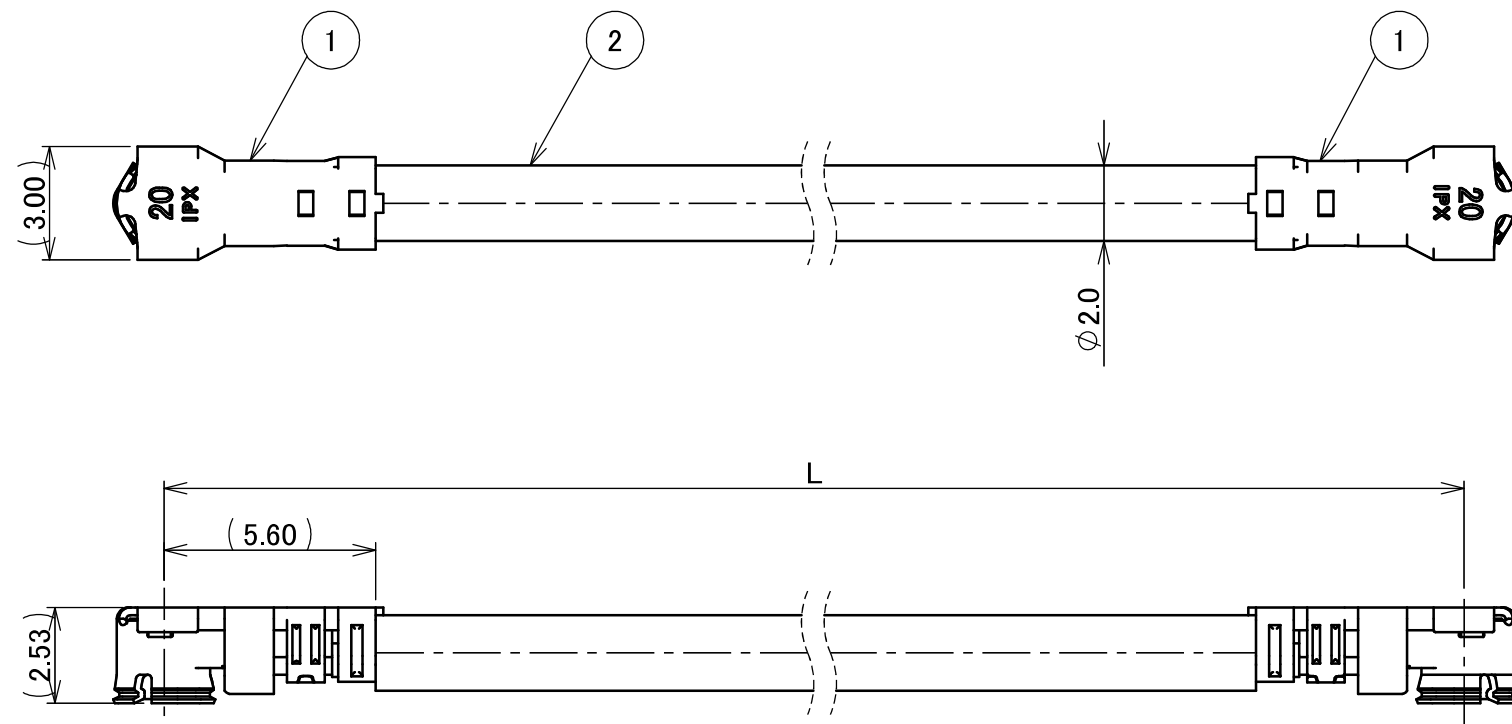


NOTES


1. SUGGESTIONS FOR MATING & UNMATING OPERATION.
 - 1-1. MATING

MATE THE CONNECTOR VERTICALLY,
ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE.
DO NOT SLANT MATE.
 - 1-2. UNMATING


1-2-1.
UNMATING BY PULLING TOOL.
[P/N 90885-0001]
USE THE PULLING TOOL AS THE FOLLOWING, AND
PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

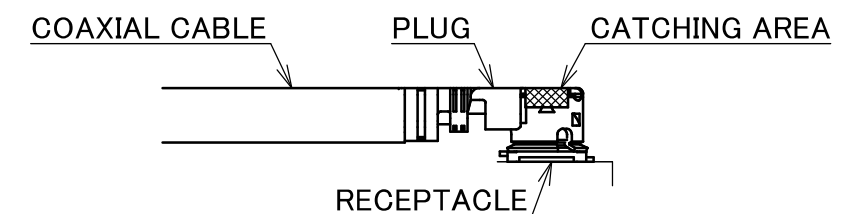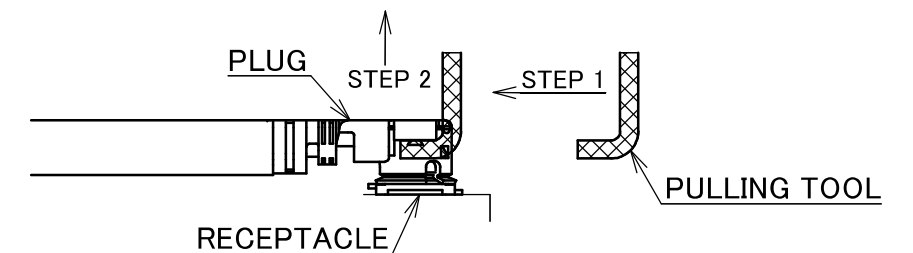

2. PACKING : PLASTIC BAG
3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING

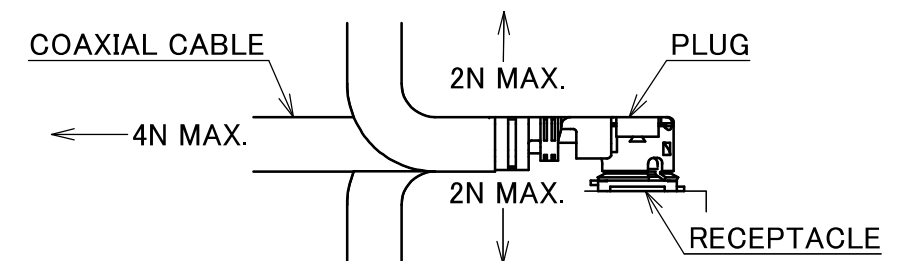

4. CABLE CRIMP STRENGTH : 15N MIN.
5. ORIENTATION OF CONNECTOR : $0^{\circ} \pm 45^{\circ}$

2	CABLE		1	AWG#26 Φ 2.0, BRAIDED SHIELD, BLACK			
1	CONNECTOR-1,2		2	MHF I Ni Top			
NO.	DESCRIPTION		QTY	REMARK			
ANGLE	±2°	6 OVER 30 MAX.	±0.3		SERIES No.	CUSTOMER COPY	
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5		H-250063C		
GENERAL TOLERANCE.			TITLE MHF® I-I CABLE2.0-1		SCALE		
DWG.	DATE				5:1		
M.Toida		2026/03/13			UNIT		
CHK.	T.Takuno		mm				
P.	APP.	K.Yufu		DWG. No.	SIZE	SHEET	REV.
				8-26-0084	A3	1/1	0



Halogen Free



RoHS Compliant

Confidential C

I-PEX Inc.

QKE-DFFDE06-02 REV.12