


PART No.	L
8-26-0085	400.00±3.0mm

PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.

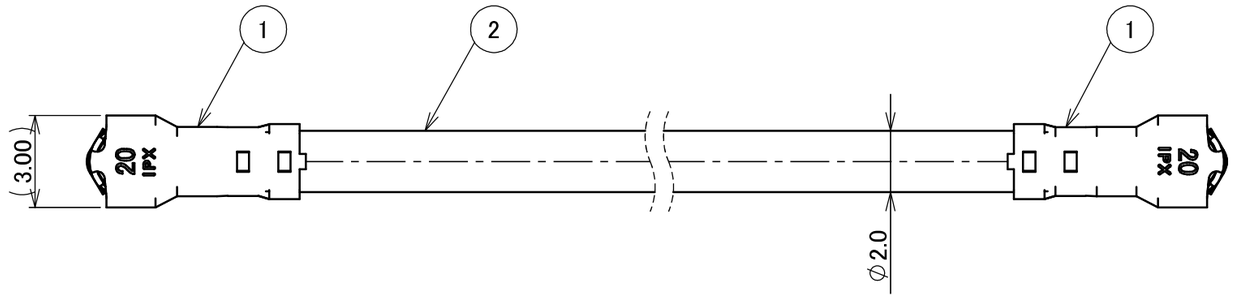


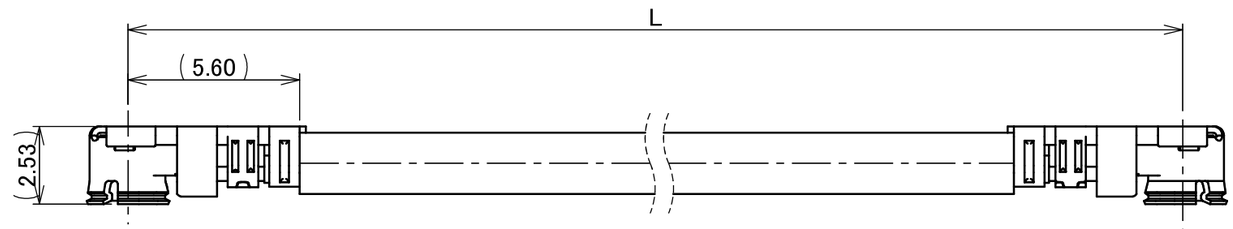


NOTES
1. SUGGESTIONS FOR MATING & UNMATING OPERATION.
 1-1. MATING
  MATE THE CONNECTOR VERTICALLY,
  ALIGHING THE MATING AXIS ON PLUG AND RECEPTACLE.
  DO NOT SLANT MATE.
 1-2. UNMATING
  1-2-1.
  UNMATING BY PULLING TOOL.
  [P/N 90885-0001]
  USE THE PULLING TOOL AS THE FOLLOWING, AND
  PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

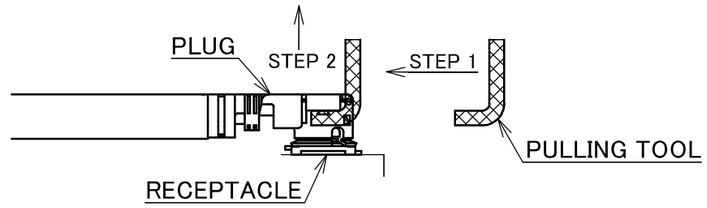

  1-2-2.
  UNMATING DIRECTLY BY HAND.
  HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG VERTICALLY.

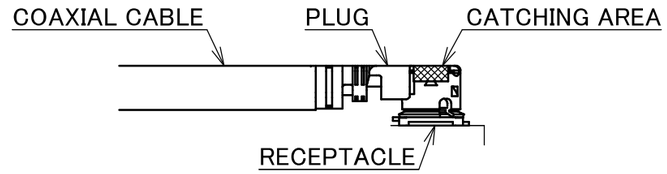

2. PACKING : PLASTIC BAG
3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING

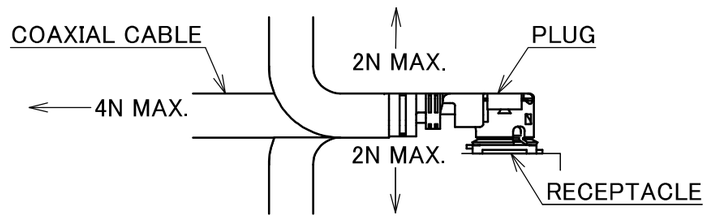

4. CABLE CRIMP STRENGTH : 15N MIN.
5. ORIENTATION OF CONNECTOR : 0° ±45°

NO.	DESCRIPTION	QTY	REMARK
2	CABLE	1	AWG#26 Φ2.0, BRAIDED SHIELD, BLACK
1	CONNECTOR-1,2	2	MHF I Ni Top

REV.	ECN	BY	DATE	APP.
0	ZH00406	TOI	2026/03/13	–

REVISION RECORD

ANGLE	±2°	6 OVER 30 MAX.	±0.3	
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5	

GENERAL TOLERANCE.

DWG.	M.Toida	DATE	2026/03/13
CHK.	T.Takuno		
APP.	K.Yufu		

PROJECTION

SERIES No. H-250063D

CUSTOMER COPY

TITLE: MHF® I-I CABLE2.0-1

SCALE 5:1

UNIT mm

DWG. No. 8-26-0085

SIZE A3

SHEET 1/1

REV. 0

I-PEX

Halogen Free

RoHS Compliant