


PART No.	L
8-26-0087	100.00±1.0mm


PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.

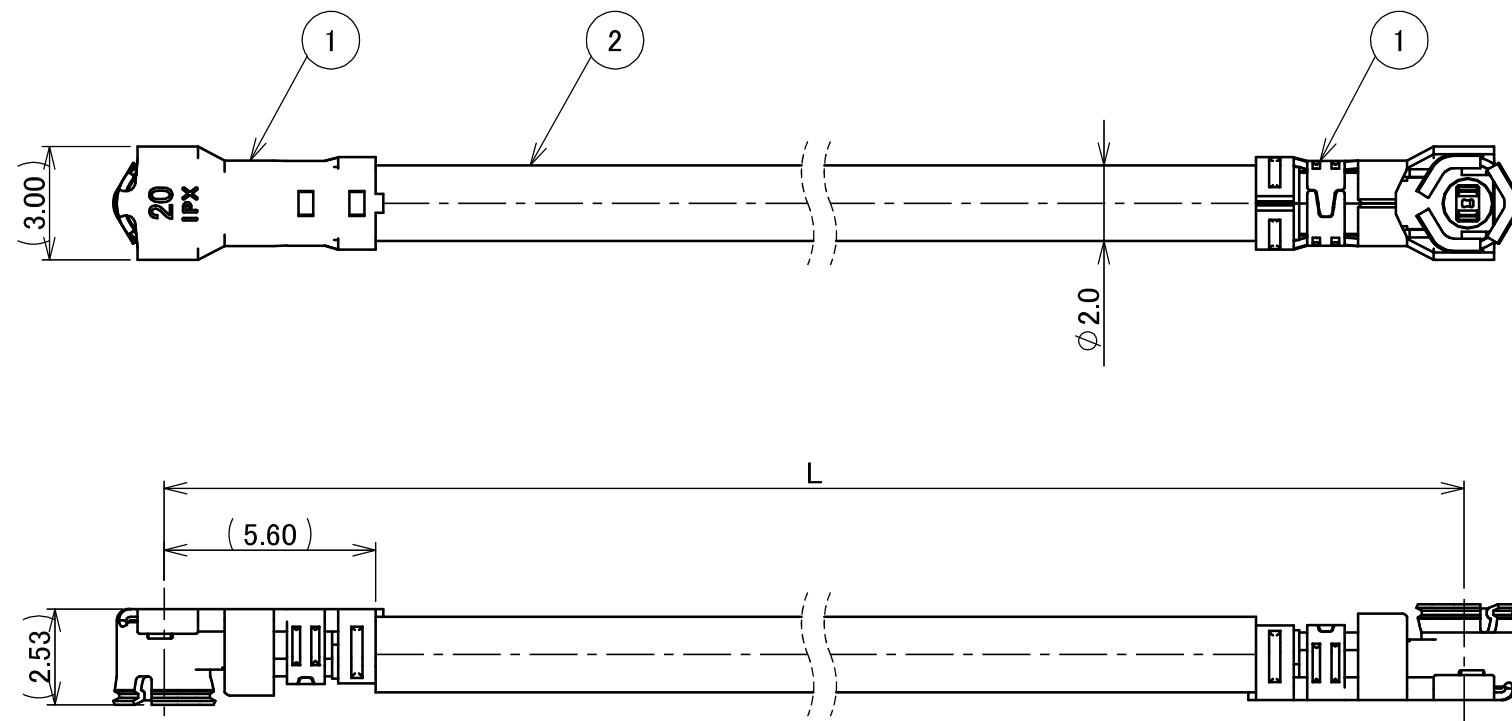


NOTES

1. SUGGESTIONS FOR MATING & UNMATING OPERATION.
 - 1-1. MATING


MATE THE CONNECTOR VERTICALLY,
ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE.
DO NOT SLANT MATE.
 - 1-2. UNMATING
 - 1-2-1.
UNMATING BY PULLING TOOL.
[P/N 90885-0001]
USE THE PULLING TOOL AS THE FOLLOWING, AND
PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

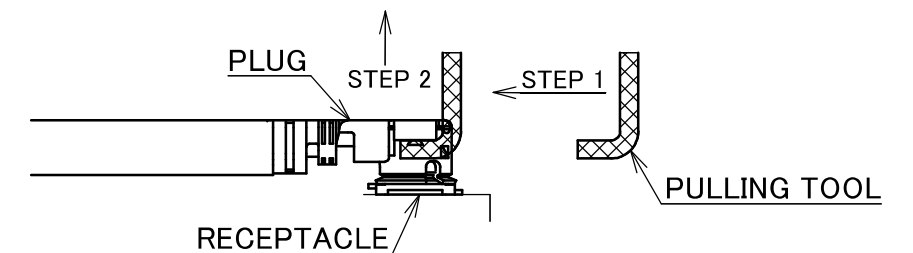



- 1-2-2.
UNMATING DIRECTLY BY HAND.
HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG
VERTICALLY.

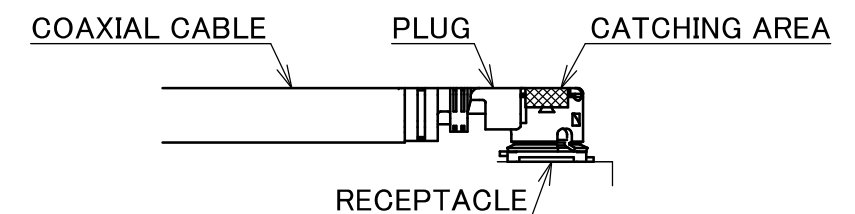

2. PACKING : PLASTIC BAG
3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING

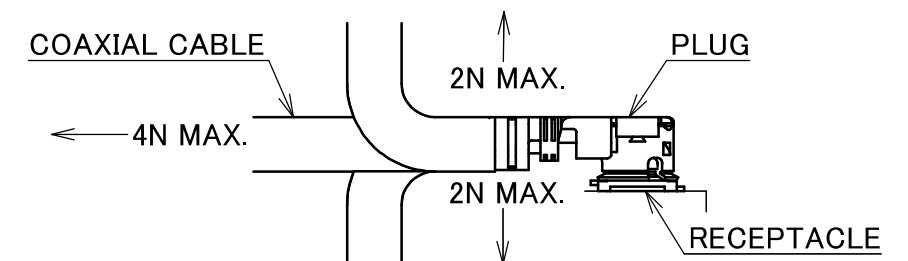

4. CABLE CRIMP STRENGTH : 15N MIN.
5. ORIENTATION OF CONNECTOR : $180^{\circ} \pm 45^{\circ}$

2	CABLE		1	AWG#26 Φ 2.0, BRAIDED SHIELD, BLACK					
1	CONNECTOR-1,2		2	MHF I Ni Top					
NO.	DESCRIPTION		QTY	REMARK					
ANGLE	±2°	6 OVER 30 MAX.	±0.3		SERIES No.	CUSTOMER COPY			
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5		H-250064A				
GENERAL TOLERANCE.					TITLE MHF® I-I CABLE2.0-2		SCALE	I-PEX	
DWG.	DATE		5:1						
M.Toida 2026/03/13			UNIT						
CHK.	T.Takuno		mm						
P.	APP. K.Yufu			DWG. No.	8-26-0087		SIZE	SHEET	REV.
							A3	1/1	0



Halogen Free



RoHS Compliant

Confidential C

I-PEX Inc.

QKE-DFFDE06-02 REV.12