



PART No.	L
8-26-0088	200.00±1.0mm


PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.

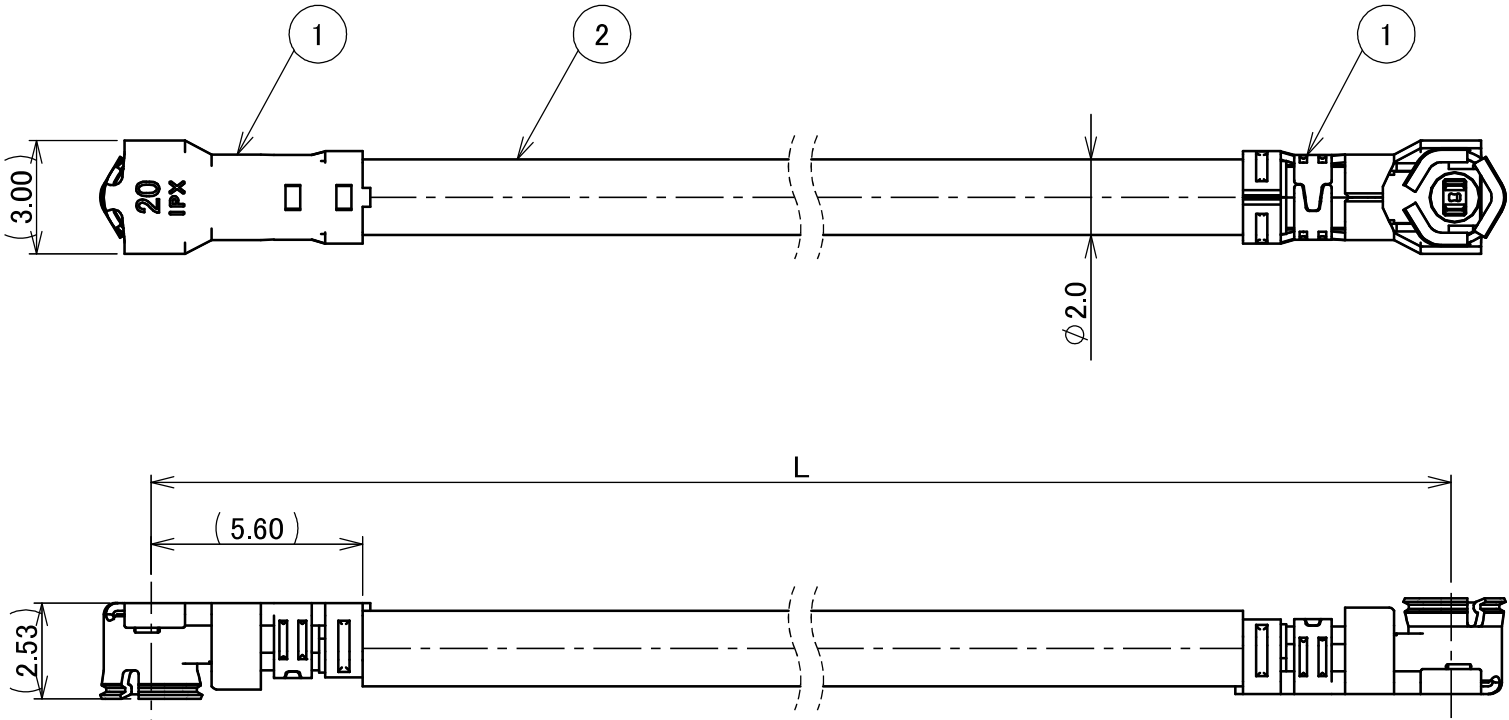


- NOTES
1. SUGGESTIONS FOR MATING & UNMATING OPERATION.
- 1-1. MATING
MATE THE CONNECTOR VERTICALLY,
ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE.
DO NOT SLANT MATE.
- 1-2. UNMATING
1-2-1.
UNMATING BY PULLING TOOL.
[P/N 90885-0001]
USE THE PULLING TOOL AS THE FOLLOWING, AND
PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

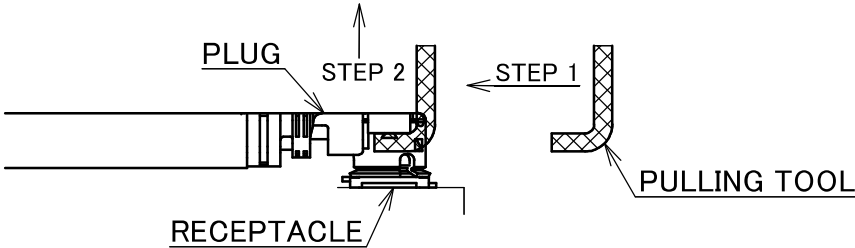

- 1-2-2.
UNMATING DIRECTLY BY HAND.
HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG
VERTICALLY.

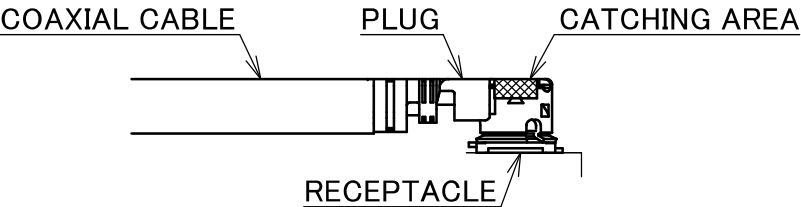

2. PACKING : PLASTIC BAG
3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING

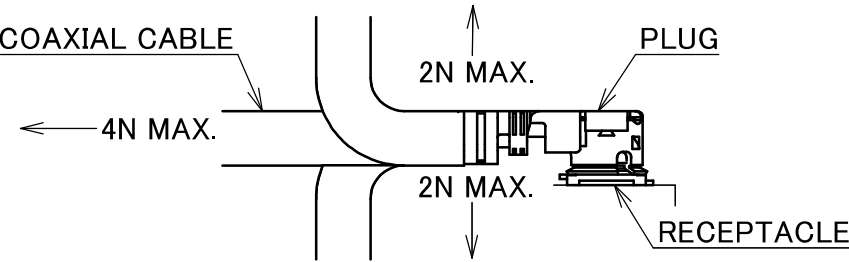

4. CABLE CRIMP STRENGTH : 15N MIN.
5. ORIENTATION OF CONNECTOR : 180° ±45°

2	CABLE	1	AWG#26 Φ2.0, BRAIDED SHIELD, BLACK
1	CONNECTOR-1,2	2	MHF I Ni Top
NO.	DESCRIPTION	QTY	REMARK
	ANGLE ±2°	6 OVER 30 MAX.	±0.3
	6 MAX. ±0.2	30 OVER 120 MAX.	±0.5
GENERAL TOLERANCE.			
DWG.	M.Toida	DATE	2026/03/13
CHK.	T.Takuno		
APP.	K.Yufu		
0	ZH00407	TOI	2026/03/13
REV.	ECN	BY	DATE
REVISION RECORD			
PROJECTION	SERIES No.	CUSTOMER COPY	
H	H-250064B		
TITLE	MHF®	SCALE	5:1
I-I CABLE2.0-2		UNIT	mm
DWG. No.	8-26-0088	SIZE	A3
		SHEET	1/1
		REV.	0



Halogen Free



RoHS Compliant

Confidential C

I-PEX Inc.

QKE-DFFDE06-02 REV.12