



PART No.	L
8-25-0066	100.0±2.0mm

PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, P/N WILL ALSO CHANGE.




- NOTES
- 1. PACKING : PLASTIC BAG
 - 2. CABLE CRIMP STRENGTH OF MHF I SIDE : 15N MIN.
CABLE CRIMP STRENGTH OF SMA JACK SIDE : 19.6N MIN.
 - 3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING

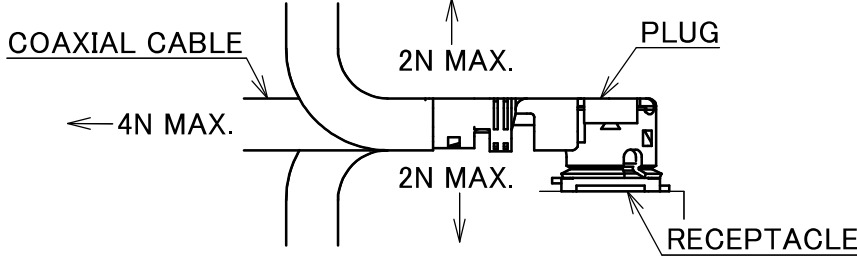

4. SUGGESTIONS FOR MATING & UNMATING OPERATION.
- 4-1. MATING
MATE THE CONNECTOR VERTICALLY,
ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE.
DO NOT SLANT MATE.
- 4-2. UNMATING
4-2-1.
UNMATING BY PULLING TOOL. [P/N 90192-001]
USE THE PULLING TOOL AS THE FOLLOWING, AND
PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

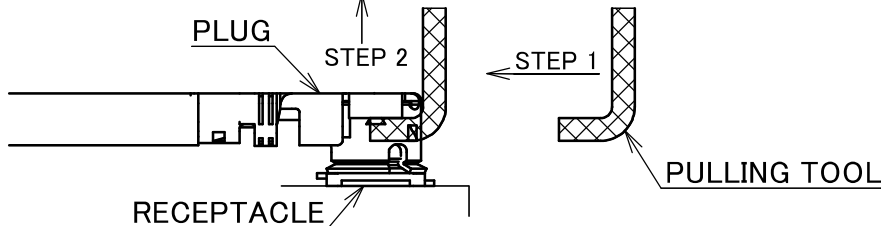

- 4-2-2.
UNMATING DIRECTLY BY HAND.
HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG
VERTICALLY.

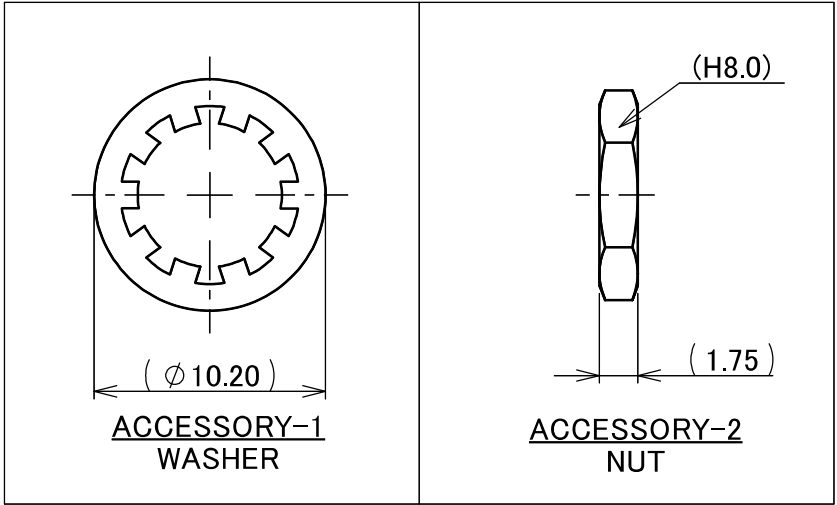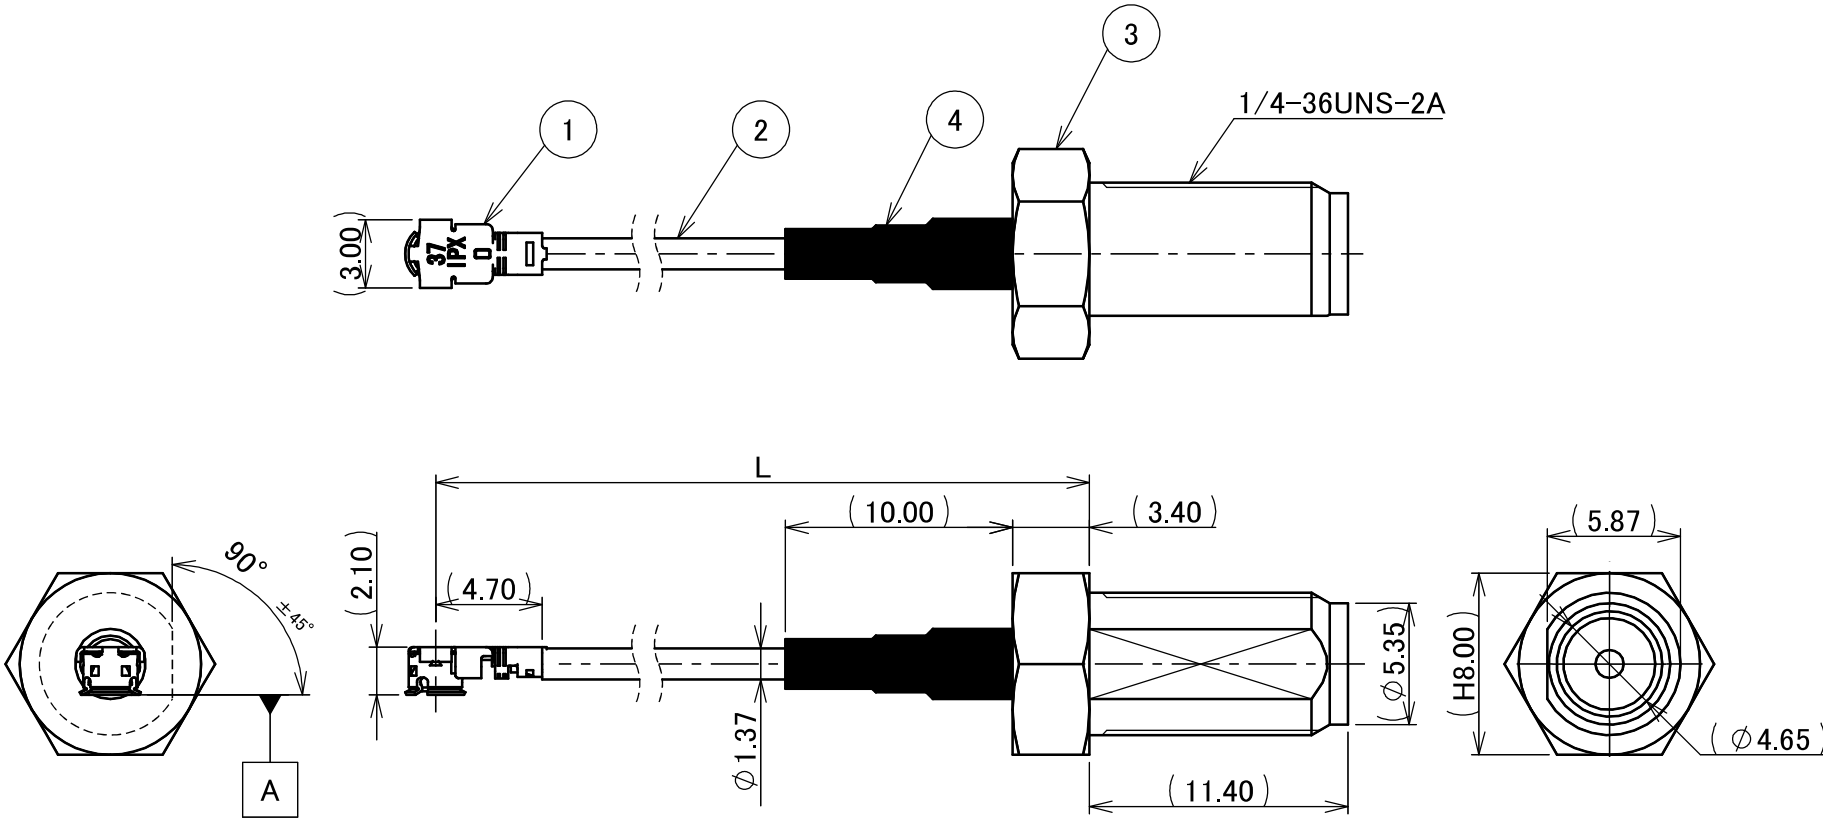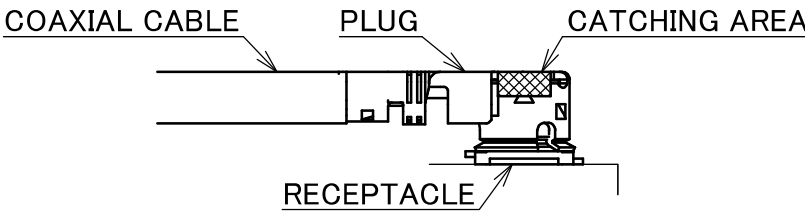

4	HEAT SHRINK TUBE	1	COLOR : BLACK
3	SMA JACK	1	-
2	CABLE	1	AWG#30 Φ 1.37, BRAIDED SHIELD + Cu-PET TAPE, BLACK
1	CONNECTOR	1	MHF I Au
NO.	DESCRIPTION	QTY	REMARK
			ANGLE $\pm 2^\circ$ 6 OVER 30 MAX. ± 0.3
			6 MAX. ± 0.2 30 OVER 120 MAX. ± 0.5
			GENERAL TOLERANCE.
			DWG. M.Toida DATE 2025/03/03
			CHK. T.Takuno
0	Z250124	TOI	2025/03/03 -
REV.	ECN	BY	DATE APP.
REVISION RECORD			
			K.Yufu
PROJECTION			
SERIES No. H-240050A			
TITLE MHF [®] I-0 CABLE137-7 +SMA(J)			
DWG. No. 8-25-0066			
SCALE 3:1			
UNIT mm			
SIZE A3			
SHEET 1/1			
REV. 0			
CUSTOMER COPY			
I-PEX			

