



PART No.	L
8-25-0067	150.0±2.0mm

PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, P/N WILL ALSO CHANGE.

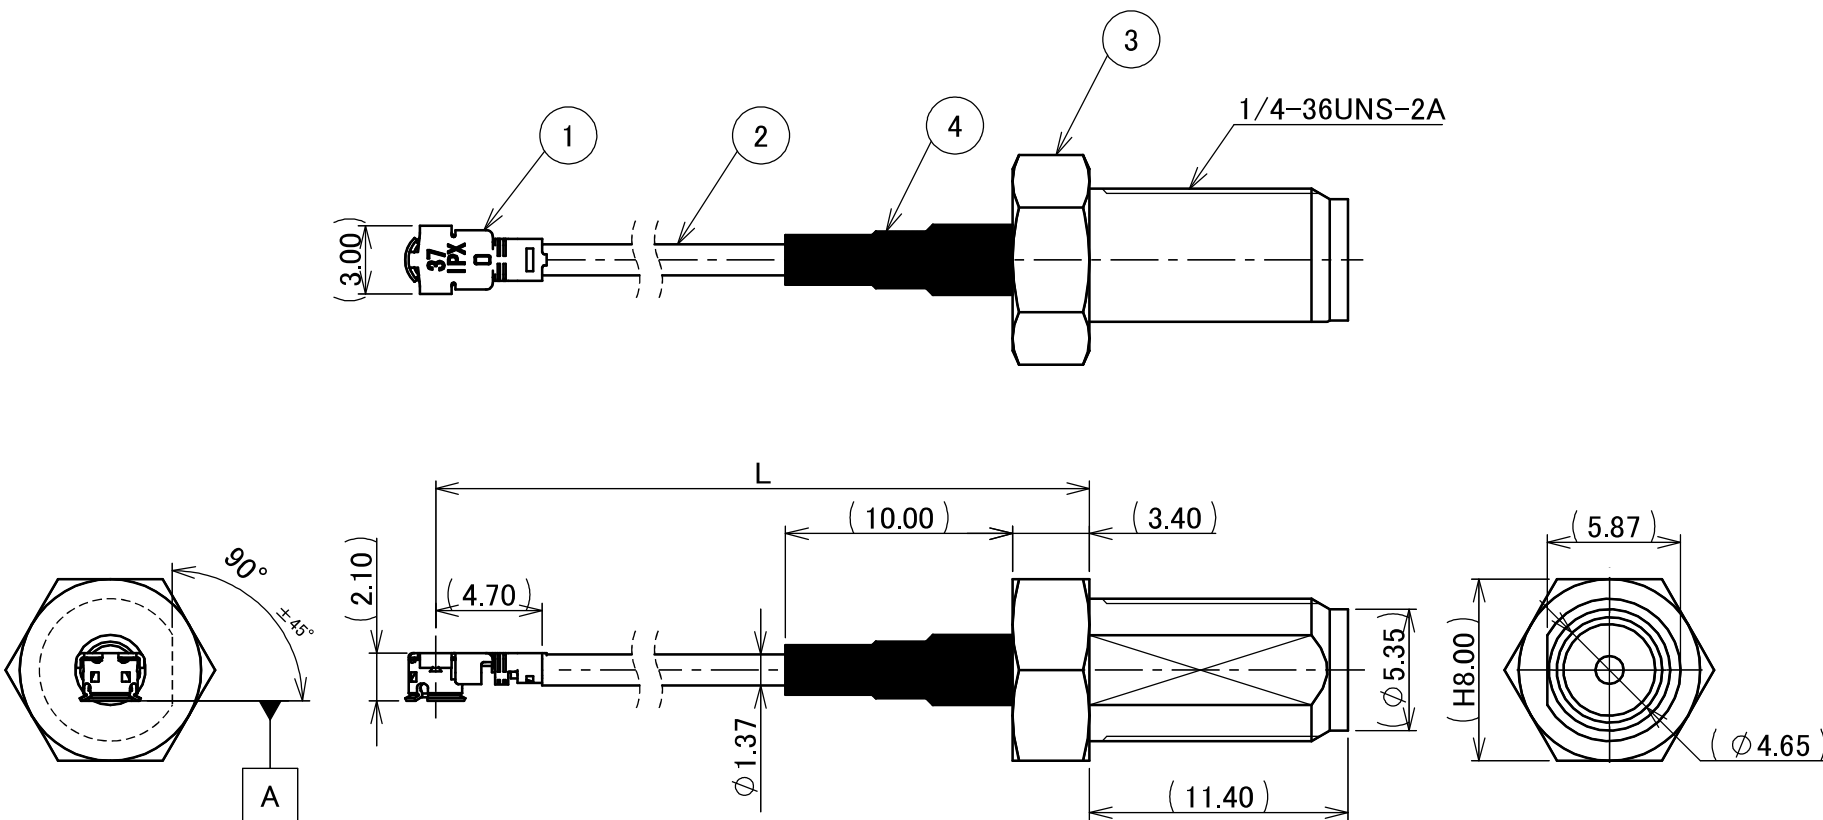


NOTES

1. PACKING : PLASTIC BAG
2. CABLE CRIMP STRENGTH OF MHF I SIDE : 15N MIN.
CABLE CRIMP STRENGTH OF SMA JACK SIDE : 19.6N MIN.
3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING


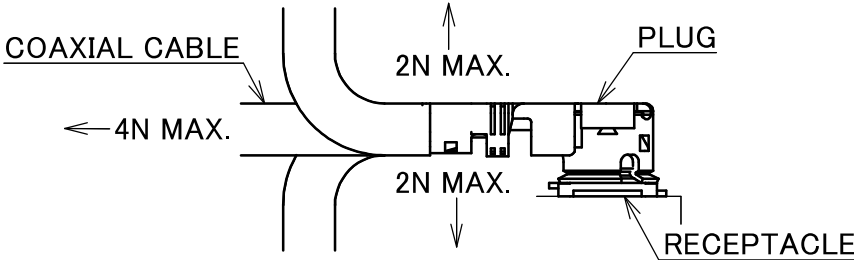


4. SUGGESTIONS FOR MATING & UNMATING OPERATION.

- 4-1. MATING
MATE THE CONNECTOR VERTICALLY,
ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE.
DO NOT SLANT MATE.
- 4-2. UNMATING
4-2-1.
UNMATING BY PULLING TOOL. [P/N 90192-001]
USE THE PULLING TOOL AS THE FOLLOWING, AND
PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

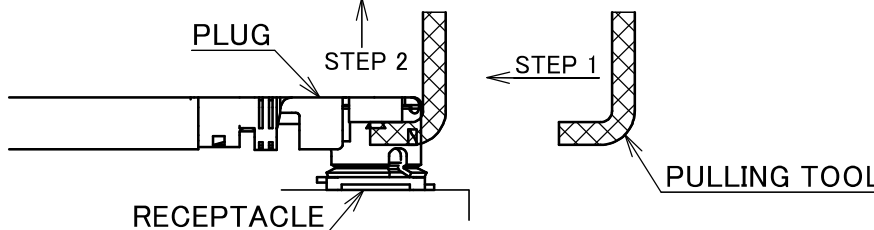

- 4-2-2.
UNMATING DIRECTLY BY HAND.
HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG
VERTICALLY.

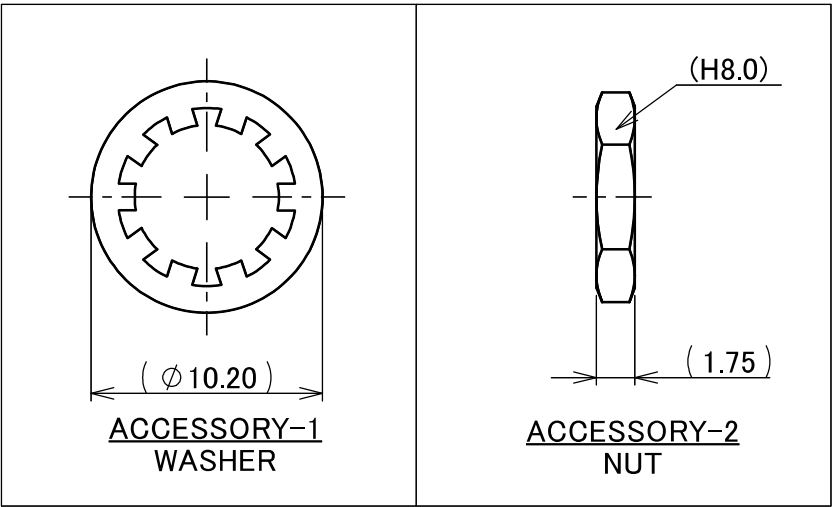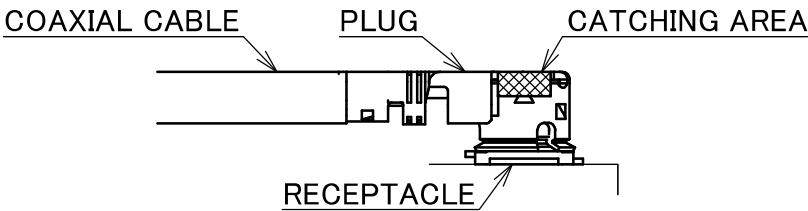

4	HEAT SHRINK TUBE	1	COLOR : BLACK			
3	SMA JACK	1	-			
2	CABLE	1	AWG#30 Φ 1.37, BRAIDED SHIELD + Cu-PET TAPE, BLACK			
1	CONNECTOR	1	MHF I Au			
NO.	DESCRIPTION	QTY	REMARK			
			ANGLE	$\pm 2^\circ$	6 OVER 30 MAX.	± 0.3
				6 MAX.	± 0.2	30 OVER 120 MAX. ± 0.5
			GENERAL TOLERANCE.			
			DWG.	M.Toida	DATE	2025/03/03
			CHK.	T.Takuno		
0	Z250124	TOI	2025/03/03	-		
REV.	ECN	BY	DATE	APP.		
REVISION RECORD					K.Yufu	
			PROJECTION	SERIES No.	CUSTOMER COPY	
				H-240050B		
			TITLE	SCALE	I-PEX	
			MHF® I-0 CABLE137-7 +SMA(J)	3:1		
			DWG. No.	SIZE	SHEET	REV.
			8-25-0067	A3	1/1	0

