

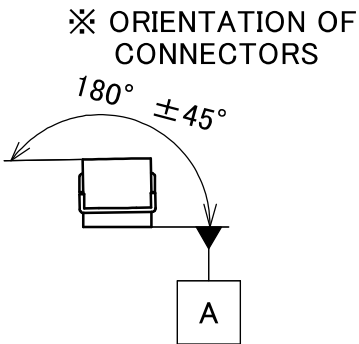


PART NO.	L
8-25-0935	100.00±1.0 mm


PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.

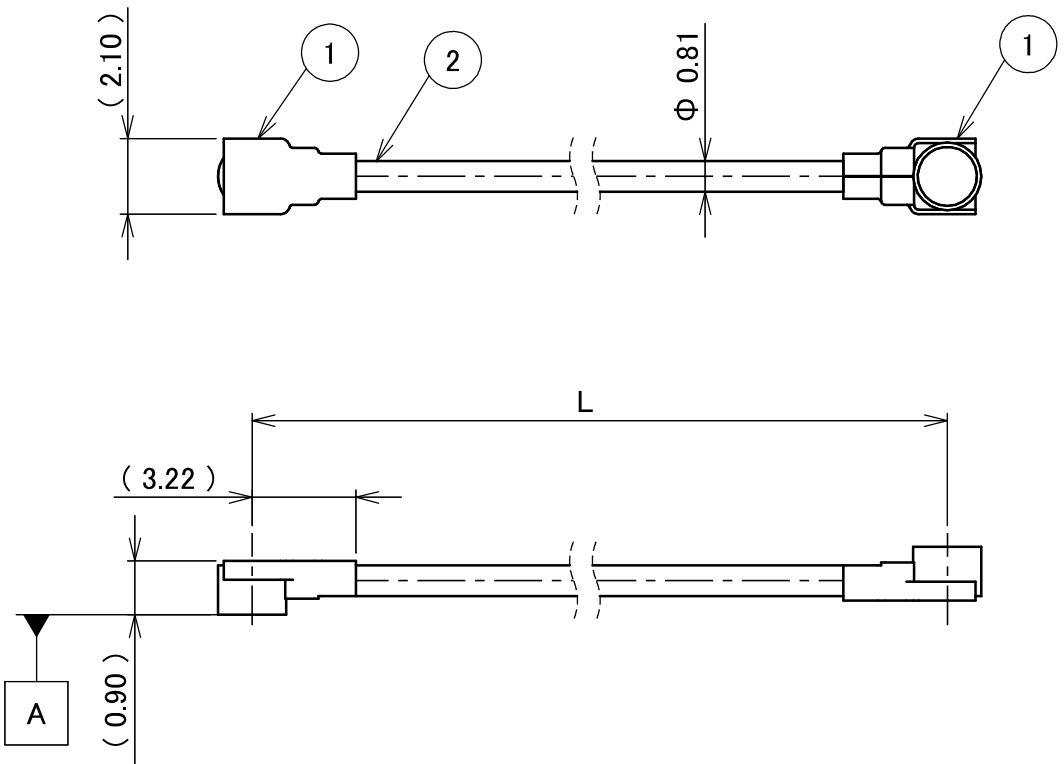


- NOTES
- SUGGESTIONS FOR MATING & UNMATING OPERATION.
 - MATING
MATE THE CONNECTOR VERTICALLY,
ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE.
DO NOT SLANT MATE.
 - UNMATING
 - UNMATING BY PULLING TOOL.
[P/N 90609-0001 (MHF 4L),]
USE THE PULLING TOOL AS THE FOLLOWING, AND
PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

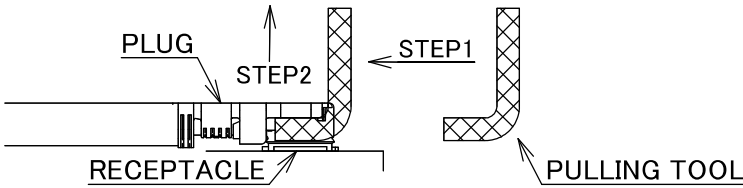

- UNMATING DIRECTLY BY HAND.
HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG
VERTICALLY.

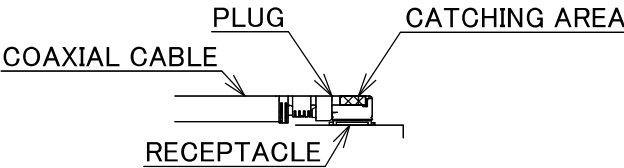

- PACKING : PLASTIC BAG
- PERMISSIBLE LOAD ON THE CABLE AFTER MATING

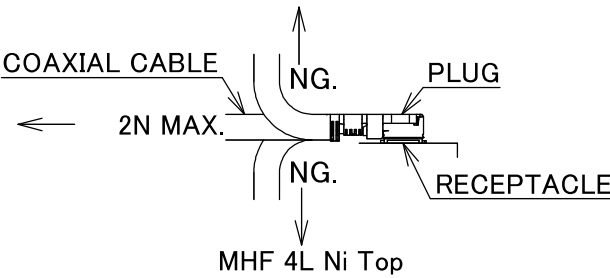

- CABLE CRIMP STRENGTH : 10N MIN.

2	CABLE	1	AWG#36 $\Phi 0.81$, BRAIDED SHIELD , BLACK
1	CONNECTOR-1, 2	2	MHF 4L Ni Top
NO.	DESCRIPTION	QTY	REMARK

					ANGLE	±2°	6 OVER 30 MAX.	±0.3		SERIES No.	CUSTOMER COPY	
					6 MAX.	±0.2	30 OVER 120 MAX.	±0.5		H-250074B		
					GENERAL TOLERANCE.				TITLE MHF® 4L-4L CABLE081-2		SCALE	I-PEX
					DWG.	DATE					X:1	
					Y.Nishimura 2025/12/11						UNIT	
0	ZH00233	Y.Ni	2025/12/11	-	CHK.	T.Takuno			mm			
REV.	ECN	BY	DATE	APP.	APP.				DWG. No.	SIZE	SHEET	REV.
REVISION RECORD					K.Yufu				8-25-0935	A3	1/1	0



Halogen Free



RoHS Compliant

Confidential C

I-PEX Inc.

QKE-DFFDE06-02 REV.12