

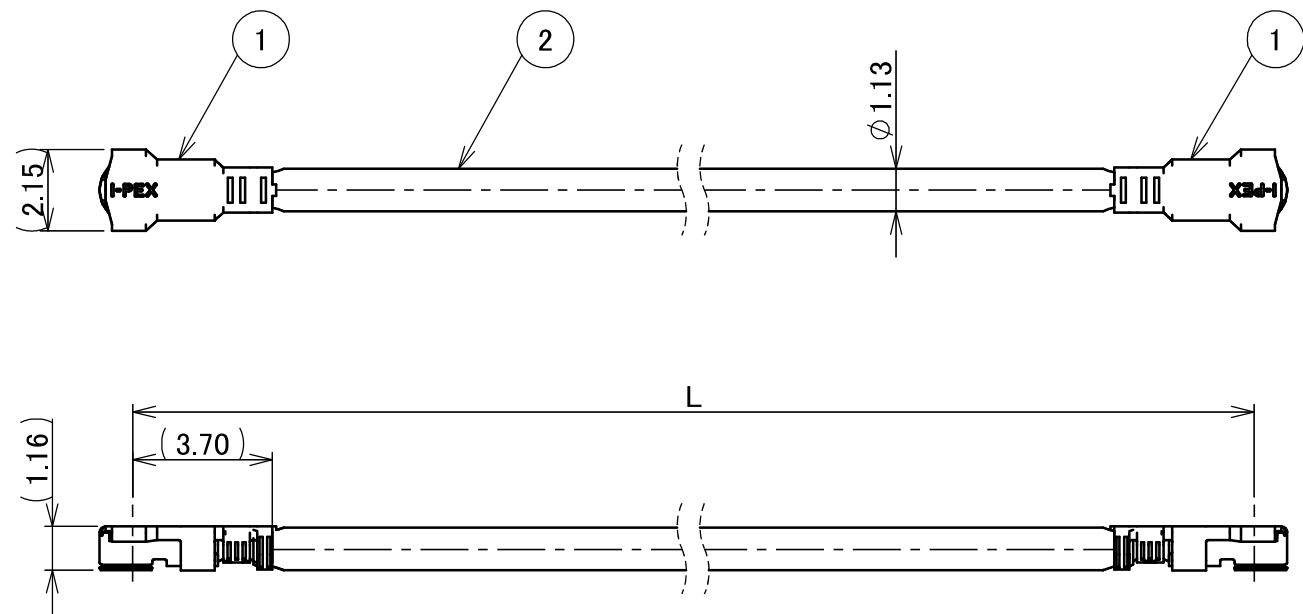
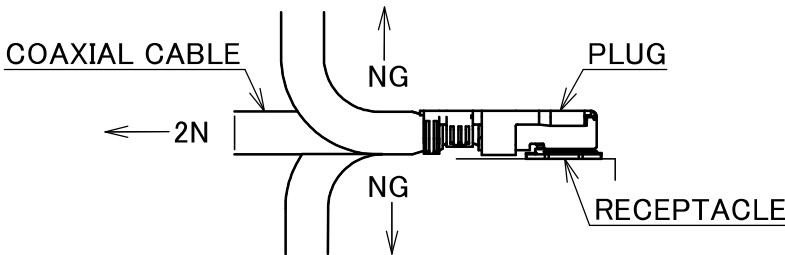


PART NO.	L
8-24-0162	50.00±1.0 mm

PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.

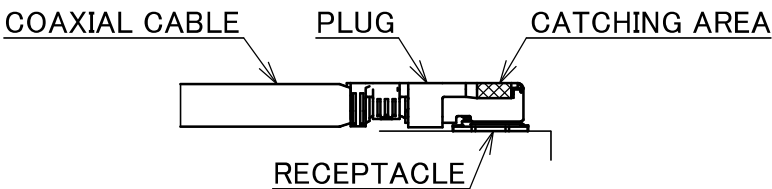

- NOTES
- SUGGESTIONS FOR MATING & UNMATING OPERATION.
 - MATING
MATE THE CONNECTOR VERTICALLY,
ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE.
DO NOT SLANT MATE.
 - UNMATING
 - UNMATING BY PULLING TOOL.
[P/N 91186-0001 (MHF 7S)]
USE THE PULLING TOOL AS THE FOLLOWING, AND
PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.
 - UNMATING DIRECTLY BY HAND.
HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG
VERTICALLY.
 - PACKING : PLASTIC BAG
 - PERMISSIBLE LOAD ON THE CABLE AFTER MATING
 - CABLE CRIMP STRENGTH : 10N MIN.
 - ORIENTATION OF CONNECTORS : $0^{\circ} \pm 45^{\circ}$

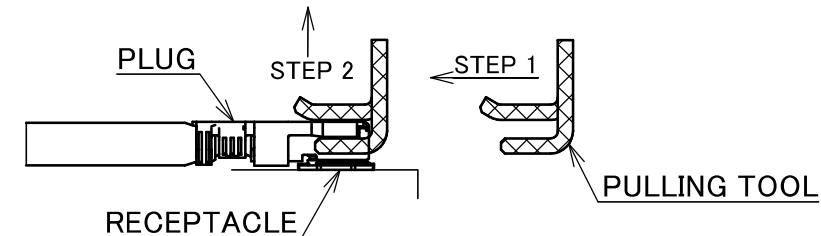

2	CABLE				1	AWG#32 Φ 1.13, BRAIDED SHIELD + Cu-PET TAPE, BLACK													
1	CONNECTOR-1,2				2	MHF 7S Ni-TOP													
NO.	DESCRIPTION				QTY	REMARK													
					ANGLE	±2°	6 OVER 30 MAX.	±0.3			SERIES No.		CUSTOMER COPY						
					6 MAX.	±0.2	30 OVER 120 MAX.	±0.5			H-240013A								
					GENERAL TOLERANCE.				TITLE MHF® 7S-7S CABLE113-1								SCALE	I-PEX	
				DWG.	DATE			5:1											
				M.Toida			2024/04/03												
				CHK.													UNIT		
0	Z240403	TOI	2024/04/03	T.Takuno				mm											
REV.	ECN	BY	DATE	APP.	APP.				DWG. No.		SIZE	SHEET	REV.						
REVISION RECORD					K.Yufu				8-24-0162		A3	1/1	0						