


PART NO.	L
8-24-0147	100.00±1.0 mm

PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS. PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.

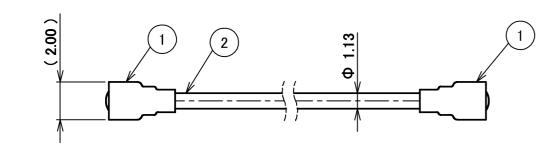

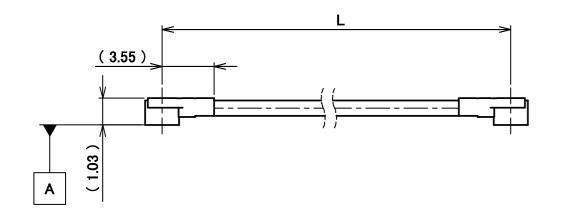



NOTES

- 1. SUGGESTIONS FOR MATING & UNMATING OPERATION.
- 1-1. MATING

MATE THE CONNECTOR VERTICALLY,

ALIGHING THE MATING AXIS ON PLUG AND RECEPTACLE. DO NOT SLANT MATE.

1-2. UNMATING


1-2-1.

UNMATING BY PULLING TOOL.

[P/N 90612-0001 (MHF 5L),]

USE THE PULLING TOOL AS THE FOLLOWING, AND


PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

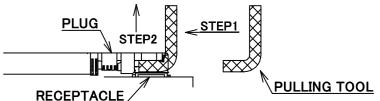


UNMATING DIRECTLY BY HAND.

HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG

VERTICALLY.



- 2. PACKING: PLASTIC BAG
- 3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING

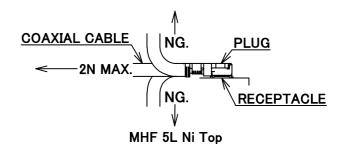

- 4. CABLE CRIMP STRENGTH: 10N MIN.
- 5. ORIENTATION OF CONNECTORS

2	CABLE	1	AWG#32 Φ 1.13, BRAIDED SHIELD , BLACK
1	CONNECTOR-1, 2	2	MHF 5L Ni Top
NO	DESCRIPTION	ΩTY	RFMARK

			INO. DI	<u> </u>	TL LIOIA	INCINIATION									
					ANGLE :	± 2°	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.		IOTO	MED (
					6 MAX.	±0.2	30 OVER 120 MAX.	± 0.5	H-240010B		CUSTOMER COPY				
					GENERAL TOLERANCE.				TITLE						
					DWG.	·		E110 1	X:1	I-PEX			,		
					M.To	ida	2024/03	3/28	SL-SL CABL	E113-1	UNIT	▎▐▀▏	Pt	:X	_
0	Z240375	TOI	2024/03/28		CHK. T.Tak	kund	0				mm				
REV.	ECN	BY	DATE	APP.	APP.				DWG. No.		SIZE	SHEET		REV.	_
REVISION RECORD				K.Yufu			8-24-0147				1/1	0			



