

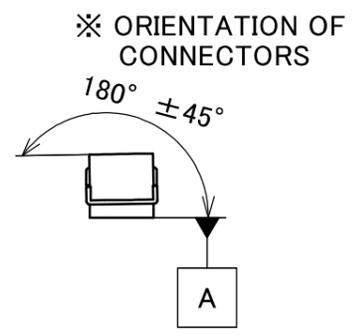


PART NO.	L
8-25-0841	500.00±5.0 mm


PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.

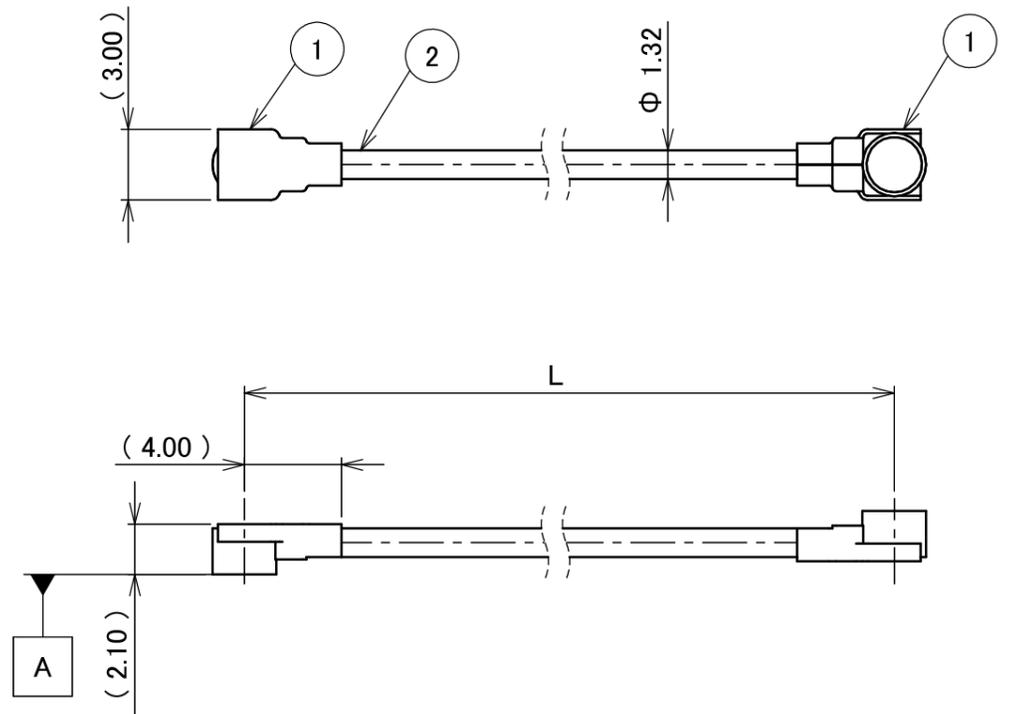


NOTES
 1. SUGGESTIONS FOR MATING & UNMATING OPERATION.
 1-1. MATING
 MATE THE CONNECTOR VERTICALLY, ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE. DO NOT SLANT MATE.
 1-2. UNMATING
 1-2-1.
 UNMATING BY PULLING TOOL.
 [P/N 90192-001 (MHF I),]
 USE THE PULLING TOOL AS THE FOLLOWING, AND PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

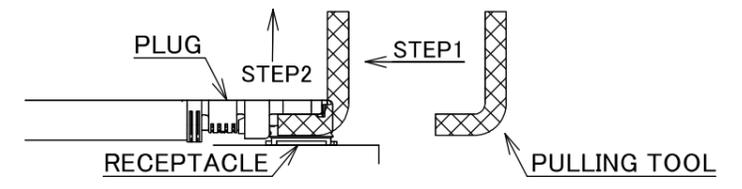

1-2-2.
 UNMATING DIRECTLY BY HAND.
 HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG VERTICALLY.

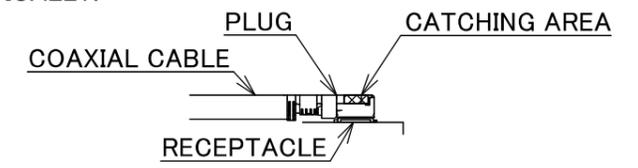

2. PACKING : PLASTIC BAG
 3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING

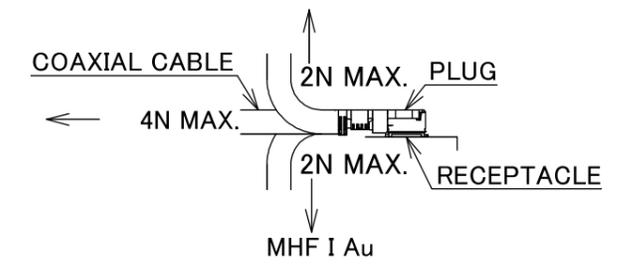

4. CABLE CRIMP STRENGTH : 10N MIN.

2	CABLE	1	AWG#32 Φ 1.32, BRAIDED SHIELD , BLACK
1	CONNECTOR-1, 2	2	MHF I Au
NO.	DESCRIPTION	QTY	REMARK

					ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. H-250059E	CUSTOMER COPY			
						6 MAX.	±0.2	30 OVER 120 MAX.						±0.5
					GENERAL TOLERANCE.					TITLE				
					DWG.	M.Toida			DATE	2025/12/22				
					CHK.	T.Takuno			MHF® I-I CABLE132-2					
0	ZH00255	TOI	2025/12/22	-	APP.	K.Yufu			DWG. No.	8-25-0841		SCALE	X:1	
REV.	ECN	BY	DATE	APP.	REVISION RECORD					SIZE	SHEET	REV.	I-PEX	
										A3	1/1	0		



Confidential C

I-PEX Inc.

QKE-DFE06-02 REV.12