


PART No.	L
8-25-0540	100.00±2.0mm

PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.

NOTES


1. PACKING : PLASTIC BAG
2. CABLE CRIMP STRENGTH OF MHF-SW23 SIDE : 10N MIN.
CABLE CRIMP STRENGTH OF SMA JACK SIDE : 19.6N MIN.
3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING.

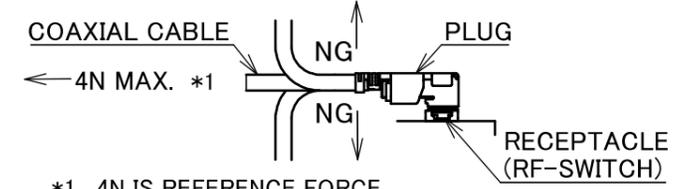




*1. 4N IS REFERENCE FORCE.
IT IS NOT STRENGTH WHICH GUARANTEES MECHANICAL AND ELECTRICAL DEFECT.

4. SUGGESTIONS FOR MATING & UNMATING OPERATION.

- 4-1. MATING
MATE THE CONNECTOR VERTICALLY,
ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE.
DO NOT SLANT MATE.
- 4-2. UNMATING
4-2-1
UNMATING BY PULLING TOOL. [P/N 91396-0001]
USE THE PULLING TOOL AS THE FOLLOWING, AND
PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

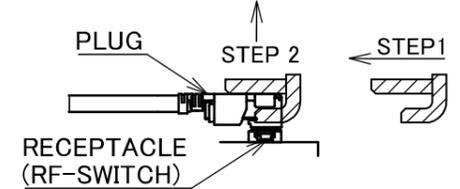

- 4-2-2
UNMATING DIRECTLY BY HAND.
HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG VERTICALLY.

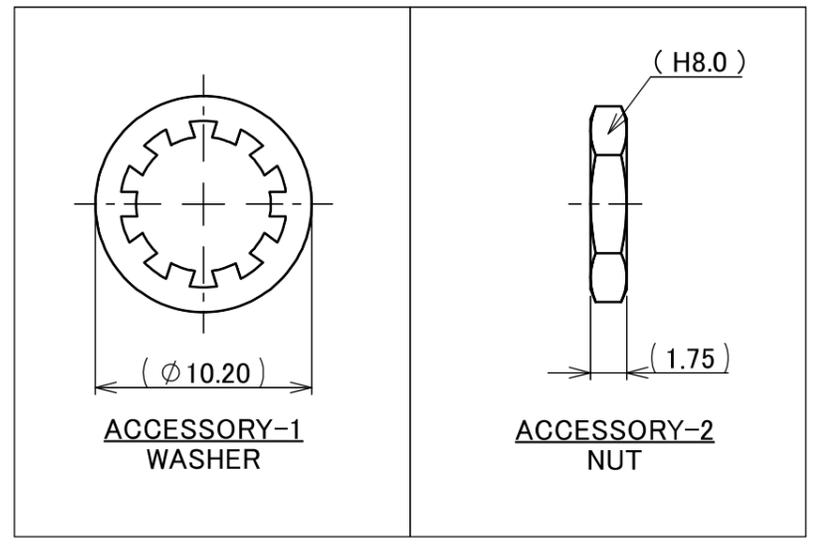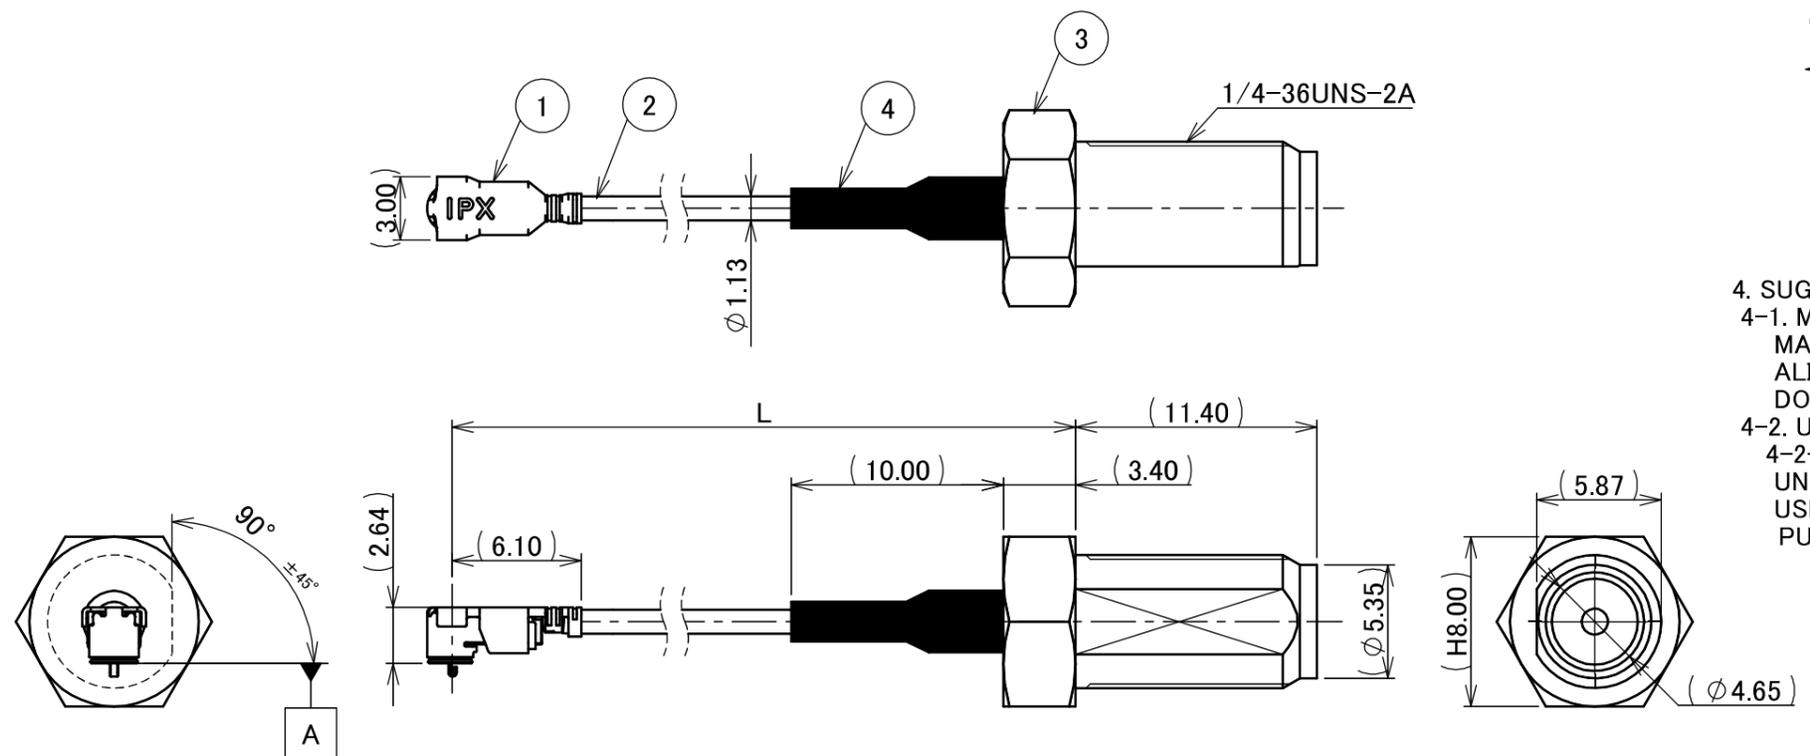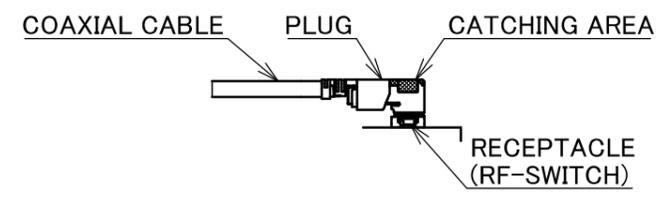

4	HEAT SHRINK TUBE	1	COLOR : BLACK
3	SMA JACK	1	-
2	CABLE	1	AWG#32 Φ 1.13, BRAIDED SHIELD + Cu-PET TAPE, BLACK
1	CONNECTOR	1	MHF-SW23 PLUG Au
NO.	DESCRIPTION	QTY	REMARK

				ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION ⊕	SERIES No. H-250034A	CUSTOMER COPY						
					6 MAX.	±0.2	30 OVER 120 MAX.				±0.5					
				GENERAL TOLERANCE.				TITLE MHF® SW23-0 CABLE113-7 +SMA(J)	SCALE 3:1	UNIT mm	I-PEX					
				DWG.	M.Toida		DATE					2025/07/02				
				CHK.	T.Takuno		APP.									
0	Z251073	TOI	2025/07/02	-					DWG. No.	8-25-0540	SIZE	A3	SHEET	1/1	REV.	0
REVISION RECORD								K.Yufu								



RoHS Compliant

Confidential C

I-PEX Inc.

QKE-DFE06-02 REV.12