


PART No.	L
8-25-0541	150.00±2.0mm


PLEASE CONTACT I-PEX FOR REQUESTS OTHER THAN THIS SPECIFICATIONS.
PLEASE NOTE IF SPECIFICATIONS CHANGE, PART NO. WILL ALSO CHANGE.

- NOTES
1. PACKING : PLASTIC BAG
 2. CABLE CRIMP STRENGTH OF MHF-SW23 SIDE : 10N MIN.
CABLE CRIMP STRENGTH OF SMA JACK SIDE : 19.6N MIN.
 3. PERMISSIBLE LOAD ON THE CABLE AFTER MATING.



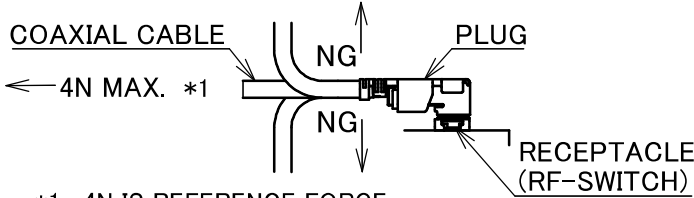


*1. 4N IS REFERENCE FORCE.
IT IS NOT STRENGTH WHICH GUARANTEES
MECHANICAL AND ELECTRICAL DEFECT.


4. SUGGESTIONS FOR MATING & UNMATING OPERATION.
- 4-1. MATING
MATE THE CONNECTOR VERTICALLY,
ALIGNING THE MATING AXIS ON PLUG AND RECEPTACLE.
DO NOT SLANT MATE.
- 4-2. UNMATING
4-2-1
UNMATING BY PULLING TOOL. [P/N 91396-0001]
USE THE PULLING TOOL AS THE FOLLOWING, AND
PULL PLUG TO VERTICAL DIRECTION AS DIRECTLY AS POSSIBLE.

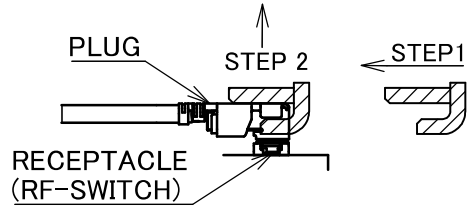

- 4-2-2
UNMATING DIRECTLY BY HAND.
HOLD THE CATCHING AREA ON PLUG AND PULL THE PLUG VERTICALLY.

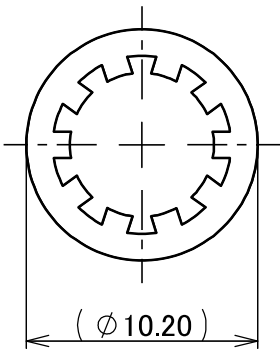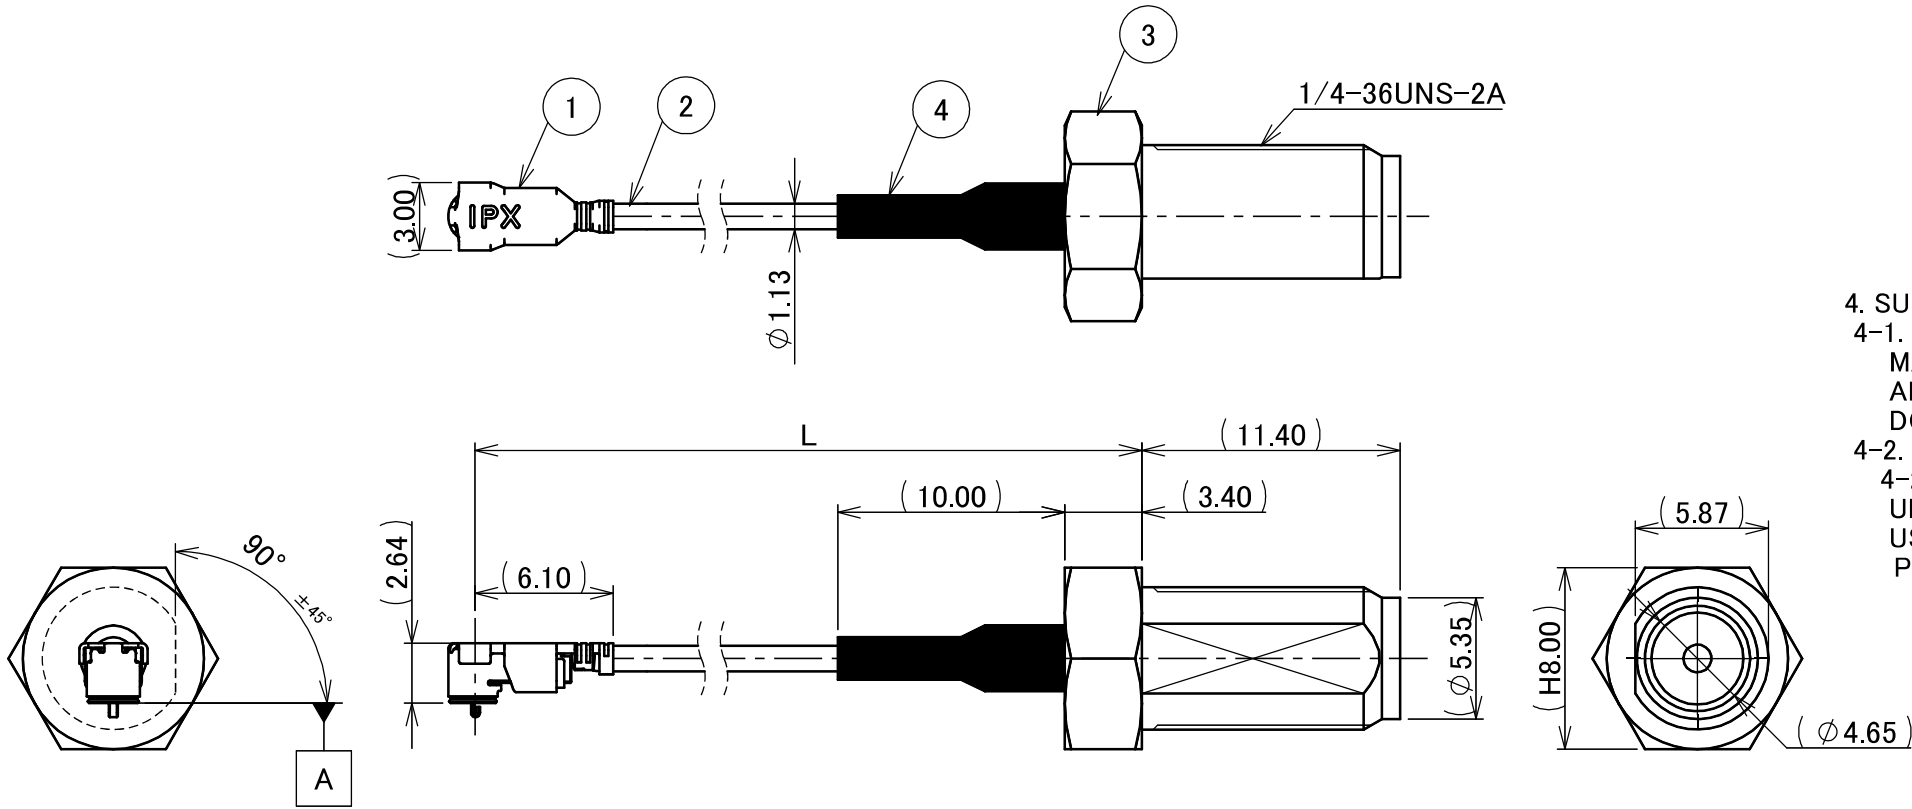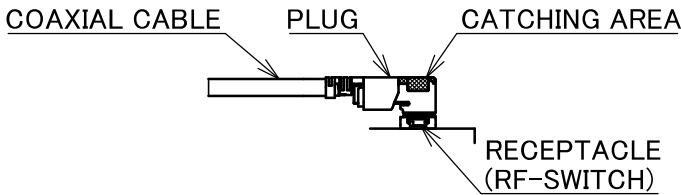

ACCESSORY-1
WASHER

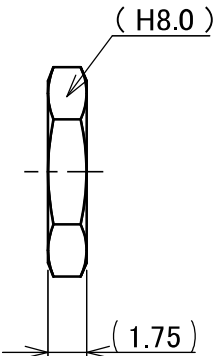

ACCESSORY-2
NUT

4	HEAT SHRINK TUBE	1	COLOR : BLACK			
3	SMA JACK	1	-			
2	CABLE	1	AWG#32 Φ 1.13, BRAIDED SHIELD + Cu-PET TAPE, BLACK			
1	CONNECTOR	1	MHF-SW23 PLUG Au			
NO.	DESCRIPTION	QTY	REMARK			
			ANGLE	±2°	6 OVER 30 MAX.	±0.3
			6 MAX.	±0.2	30 OVER 120 MAX.	±0.5
			GENERAL TOLERANCE.			PROJECTION
			DWG.	DATE	TITLE	
			M.Toida	2025/07/02	MHF® SW23-0 CABLE113-7 +SMA(J)	
			CHK.	T.Takuno	SERIES No. H-250034B	
0	Z251073	TOI	2025/07/02	-	CUSTOMER COPY	
REV.	ECN	BY	DATE	APP.	DWG. No.	SCALE
					8-25-0541	3:1
REVISION RECORD						UNIT
						mm
						SIZE
						A3
						SHEET
						1/1
						REV.
						0



RoHS Compliant

Confidential C

I-PEX Inc.

QKE-DFFDE06-02 REV.12