

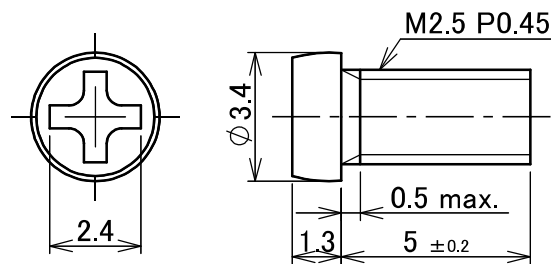
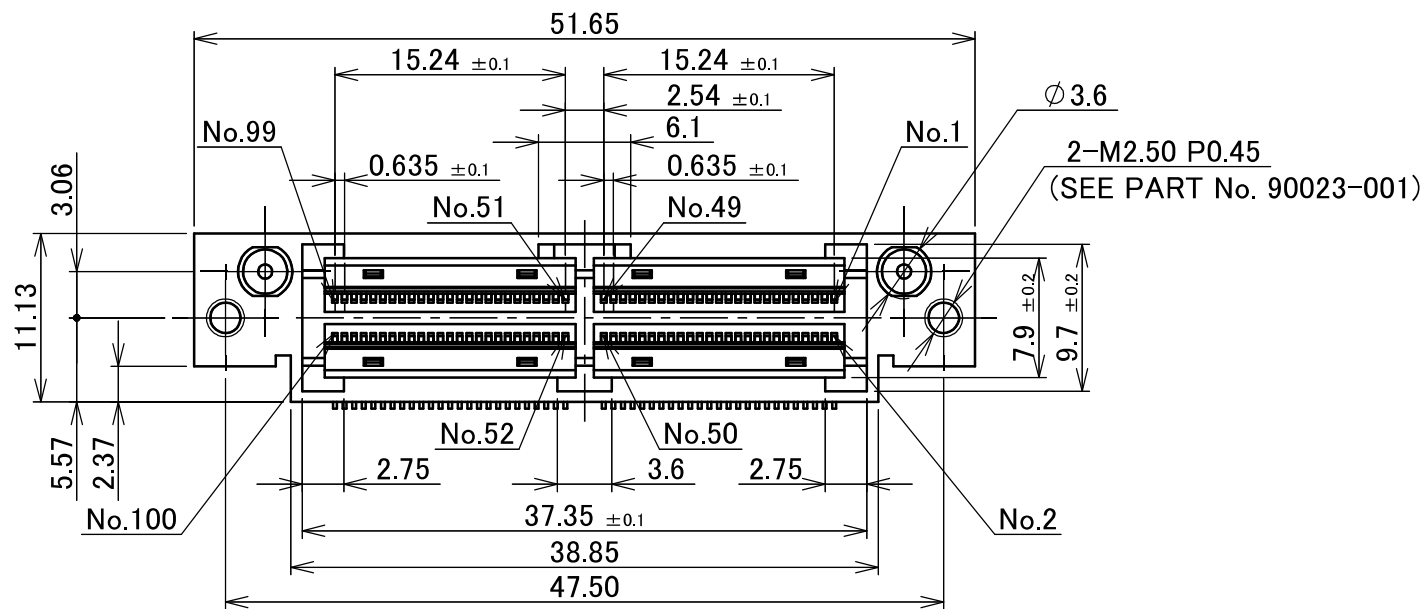


Recommended P/N		30002-100T-F	30002-100T-01F
PART No.	POS.	SCREW	
30002-100T-F	100P	WITHOUT SCREW	
30002-100T-01F	100P	WITH SCREW	

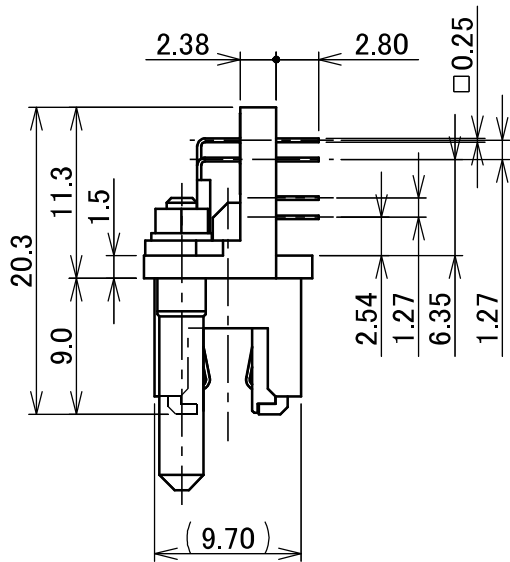

RoHS Compliant

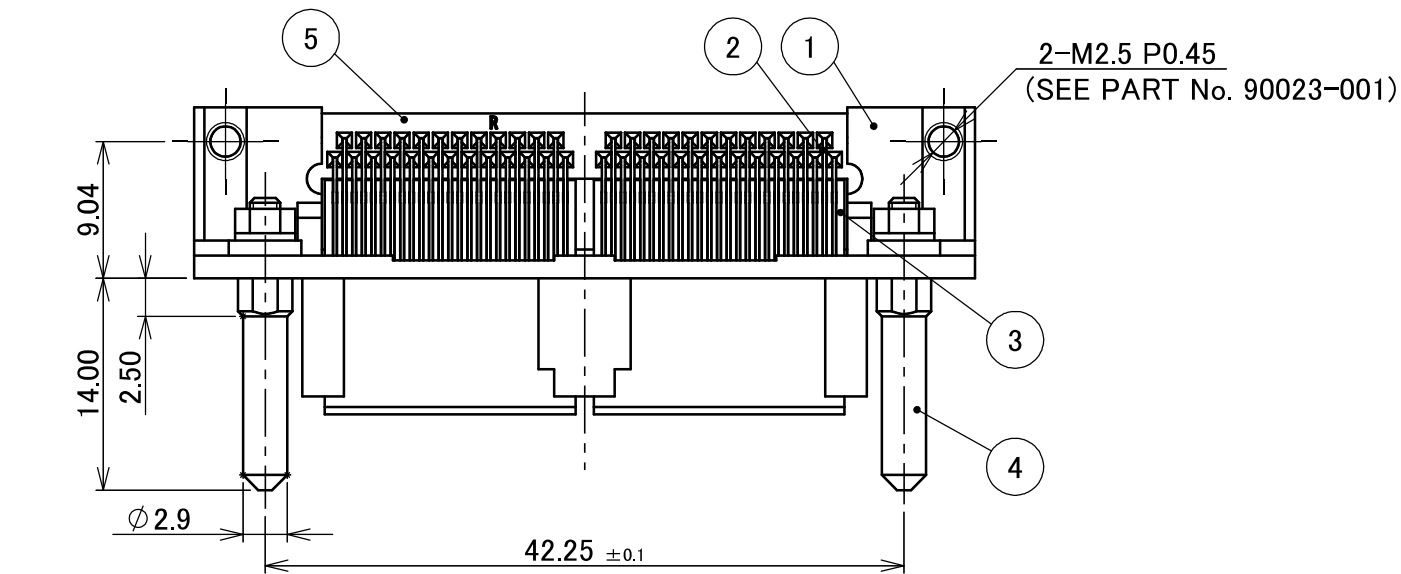

SCREW 90023-001 (S= 5/1)


30002-100T-**F
NONE: WITHOUT SCREW
01: WITH SCREW
POS.

NOTE
1. CONNECTOR TO BE MATED: 30001, 30005

ITEMS	SPECIFICATION
RATING VOLTAGE	250V AC (PER CONTACT PIN)
RATING AMPERAGE (FOR CONTACT)	0.5A AC/DC (PER CONTACT PIN)
OPERATING TEMPERATURE	208~358K(−65°C~+85°C)
OPERATING HUMIDITY	85% MAX.
CONTACT RESISTANCE (FOR CONTACT)	INITIAL : 70mohm MAX. / AFTER TEST : $\triangle$ 25mohm MAX.
INSULATION RESISTANCE	INITIAL : 10,000Mohm MIN. / AFTER TEST : 1,000Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC500V 1min
DURABILITY	5,000 CYCLES
MATING FORCE (INITIAL)	0.9N/pos. MAX.
UNMATING FORCE (AFTER TEST)	0.059N/pos. MIN.
COPLANARITY	—
PRODUCT SPECIFICATION	PRS-1011
TEST REPORT	TR-9020
PACKING STANDARD	300-015
INSTRUCTION MANUAL	—
APPEARANCE CRITERIA No.	QLS-A***

ANGLE	±2°	6 OVER 30 MAX.	±0.3		SERIES No. R15	CUSTOMER COPY		
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5					
GENERAL TOLERANCE.				TITLE MINIDOCK™ Standard CONNECTOR RIGHT ANGLE RECEPTACLE		SCALE		
DWG.	DATE					2:1		
CHK.						UNIT		
APP.						mm		
				DWG. No.	30002	SIZE	SHEET	REV.
						A3	2/4	34

PART NO.	Pos.	QTY./ TRAY	QTY./ SHIPPING CARTON	QTY./ PACKING CARTON
30002-100T-F	100P	20	20 × 5 = 100	100 × 4 = 400
30002-100T-01F				

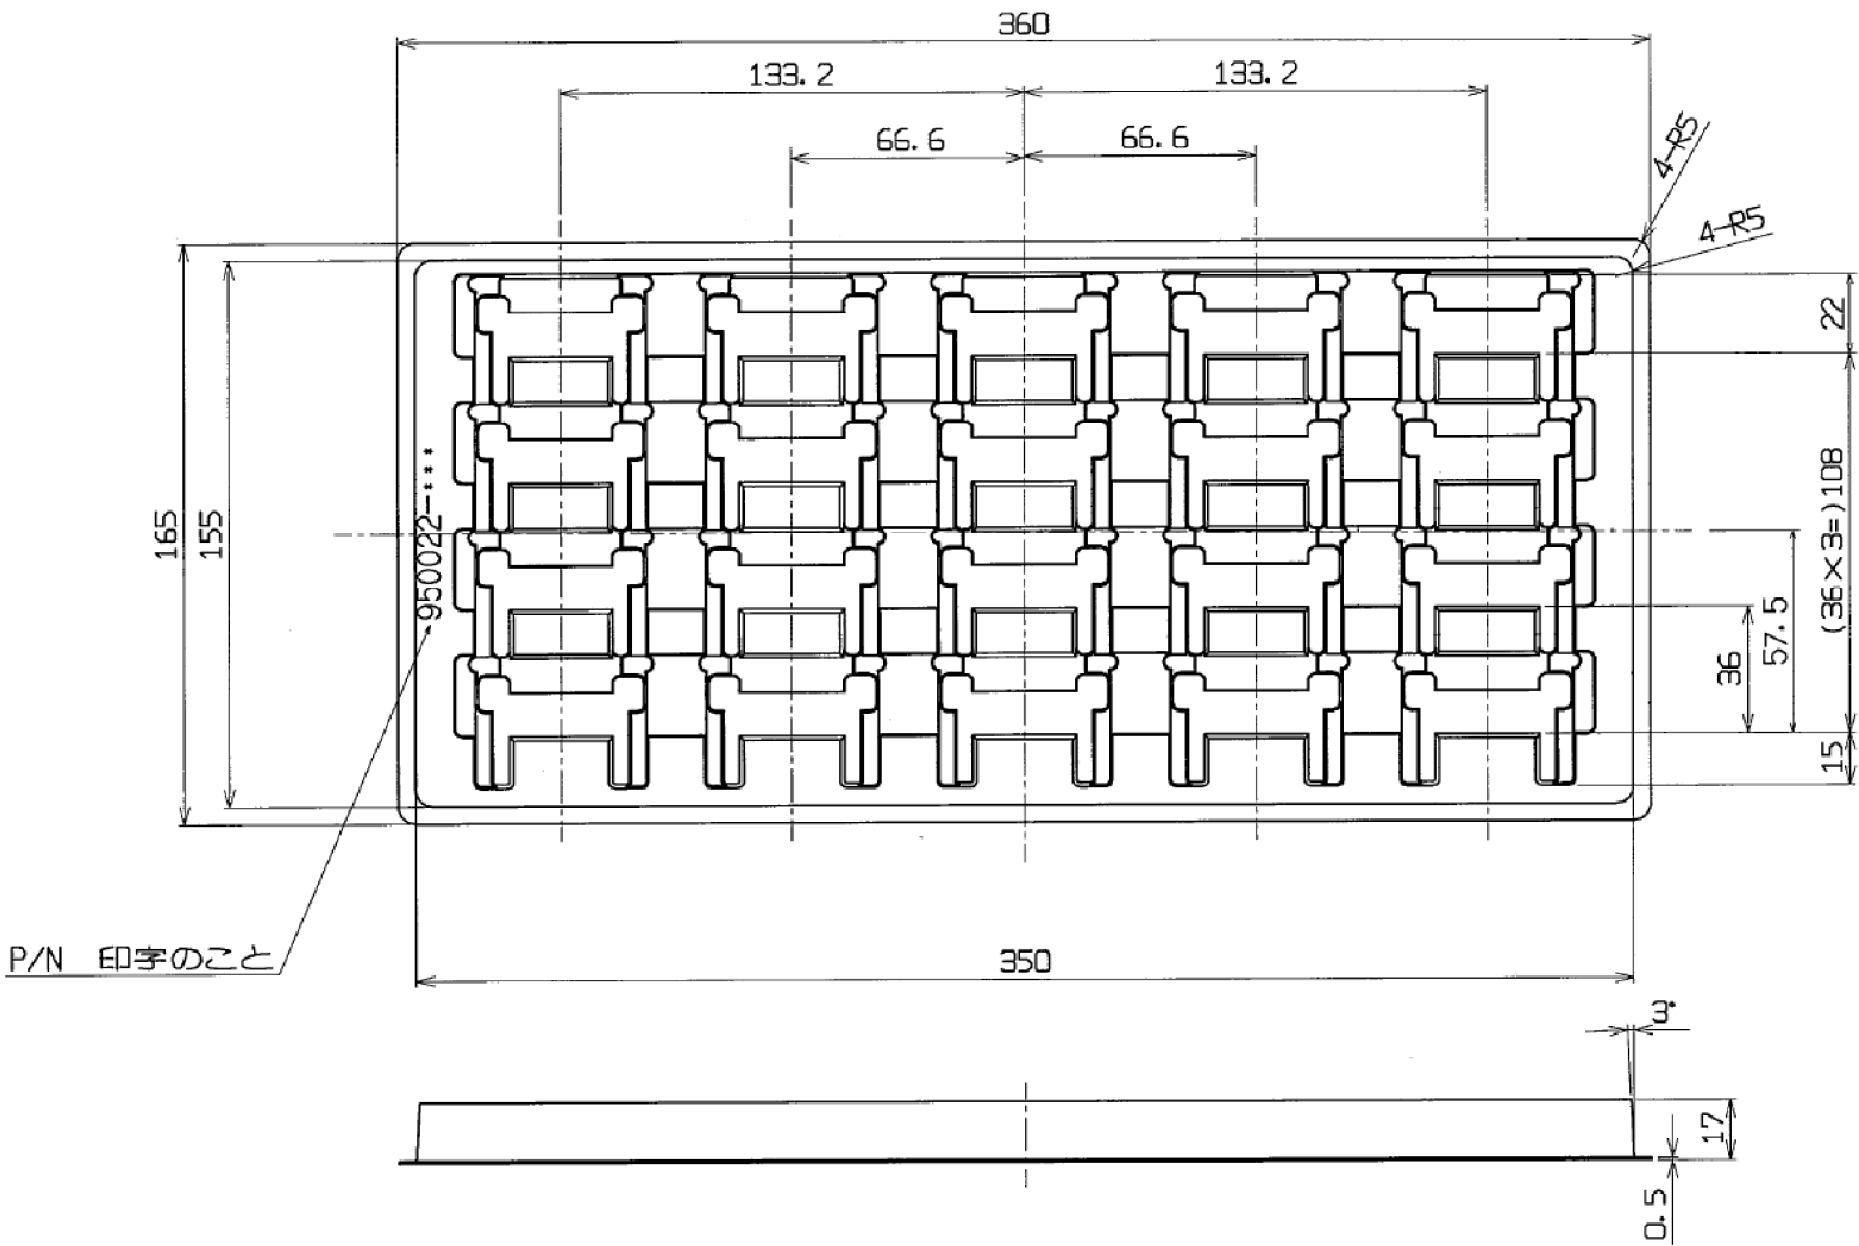

8	TRAY			PVC		—	
NO.	DISCRIPTION			MATERIAL		FINISH , REMARKS	
ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION		SERIES No.	
6 MAX.	±0.2	30 OVER 120 MAX.	±0.5			R15	
GENERAL TOLERANCE.				TITLE MINIDOCK™ Standard CONNECTOR RIGHT ANGLE RECEPTACLE		SCALE	
DWG.		DATE				5:1	
CHK.						UNIT	
APP.						mm	
				DWG. No.		SIZE	SHEET
				30002		A3	4/4
						REV.	
						34	