
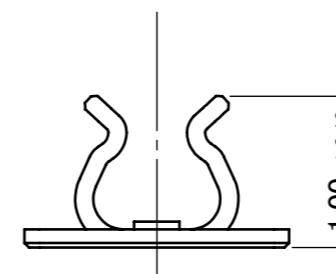
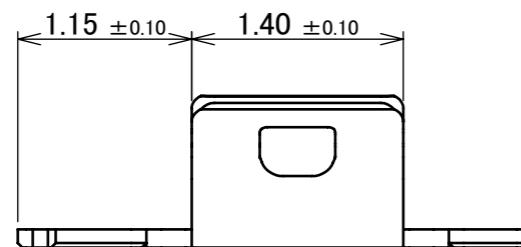
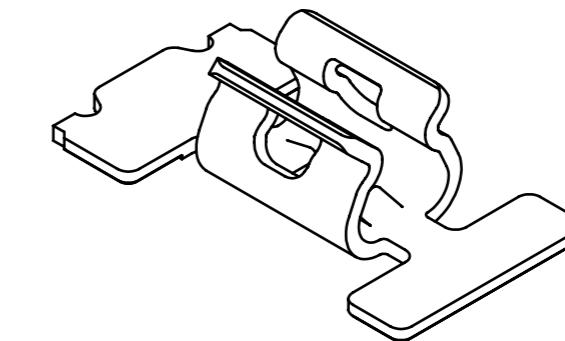


### Recommended P/N

3186-0001

**PART NO.**



3186-0001

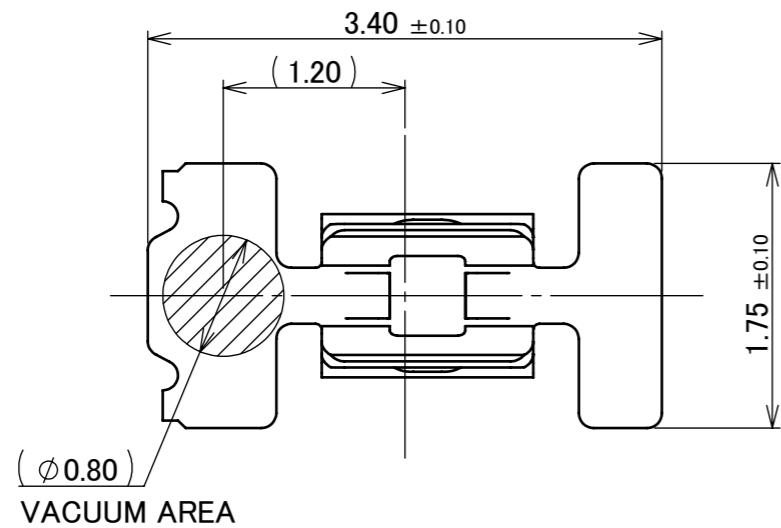



ITEMS	SPECIFICATION
APPLICABLE CONNECTOR PART No.	•CABLE CLAMP (3mm) FOR $\Phi$ 0.64 COAXIAL CABLE (P/N: 2918-030*) •CABLE CLAMP (6mm) FOR $\Phi$ 0.64 COAXIAL CABLE (P/N: 2918-060*)
OPERATING TEMPERATURE	233~358K(-40°C~+85°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
CONTACT RESISTANCE	INITIAL : 70mohm MAX. / AFTER TEST : 70mohm MAX.
DURABILITY	5 CYCLES
MATING FORCE (INITIAL / AFTER TEST)	INITIAL : 25N MAX. / AFTER TEST : 25N MAX.
UNMATING FORCE (INITIAL / AFTER TEST)	INITIAL : 3N MIN. / AFTER TEST : 2N MIN.
PRODUCT SPECIFICATION	PRS-2130
TEST REPORT	TR-15085
PACKING STANDARD	PST-15081
INSTRUCTION MANUAL	HIM-15029
APPEARANCE CRITERIA No.	QLS-A***

ANGLE $\pm 2^\circ$	6 OVER 30 MAX. $\pm 0.3$	PROJECTION	SERIES No.	CUSTOMER COPY
6 MAX. $\pm 0.2$	30 OVER 120 MAX. $\pm 0.5$		R0	
GENERAL TOLERANCE.		TITLE MP-A 03	SCALE	
DWG.	DATE		5:1	
CHK.			UNIT	I-PEX
APP.	DWG. No.	mm		
	3186	SHEET	2/5	2

①  $\Phi 0.64$  COAXIAL CABLE WITH 3mm CABLE CLAMP (P/N : 2918-0302)

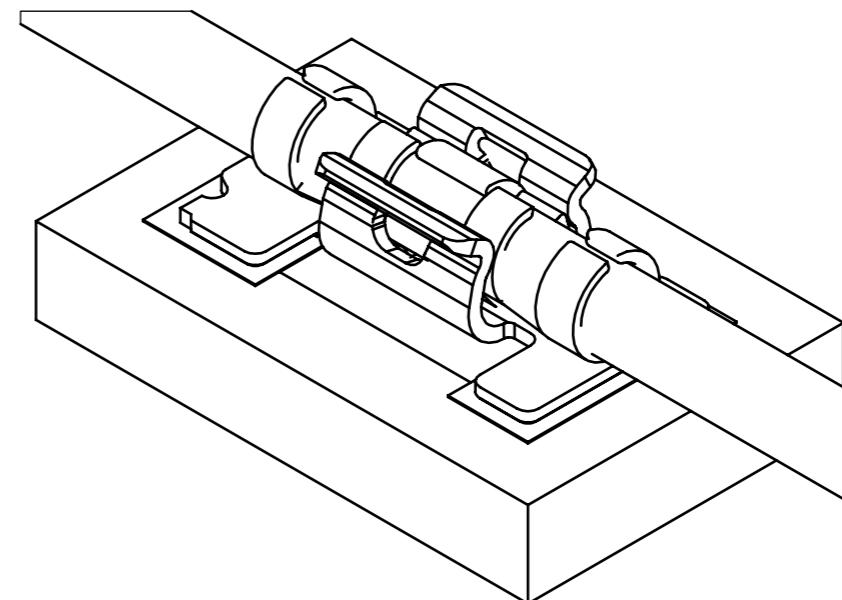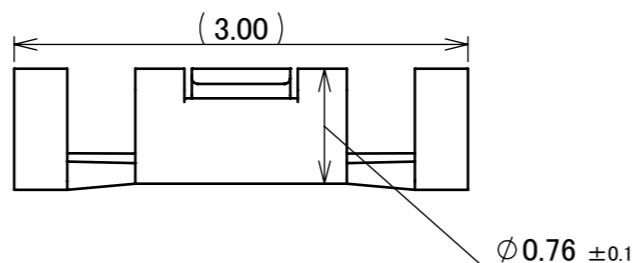

②  $\Phi 0.64$  COAXIAL CABLE WITH 6mm CABLE CLAMP (P/N : 2918-0602)

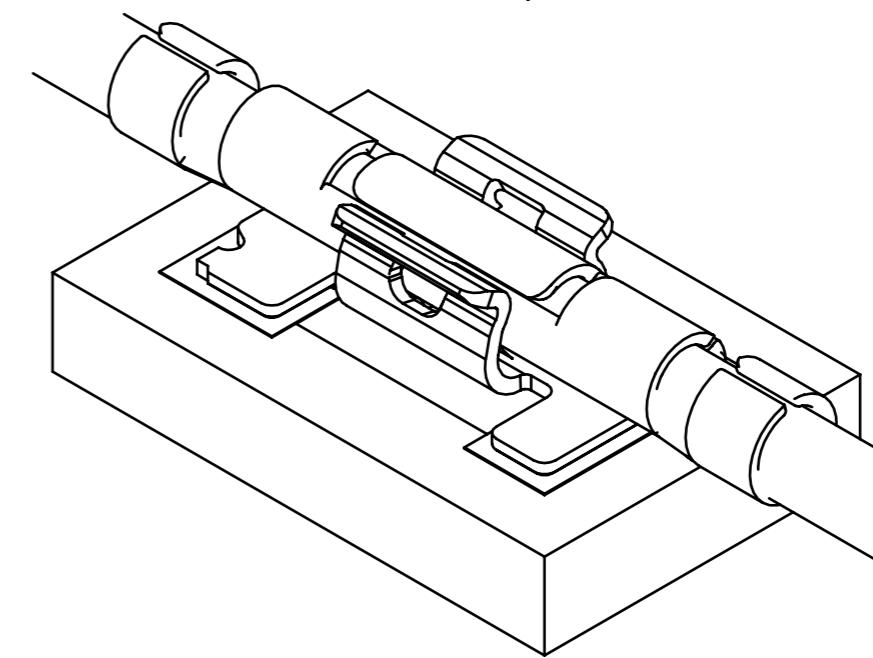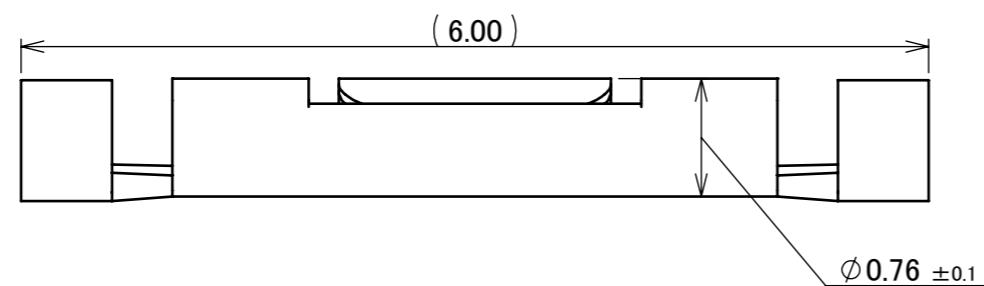


APPLICABLE CABLE

MATING CONDITION


NOTE.

1. ONLY A SIMILAR CABLE IS REPLACEABLE.


ANGLE	$\pm 2^\circ$	6 OVER 30 MAX.	$\pm 0.3$	PROJECTION	SERIES No.	CUSTOMER COPY
6 MAX.	$\pm 0.2$	30 OVER 120 MAX.	$\pm 0.5$	TITLE	R0	
GENERAL TOLERANCE.						
DWG.		DATE			SCALE	20:1
CHK.				MP-A 03	UNIT	mm
APP.			DWG. No.	3186	SIZE	3/5
					REV.	2

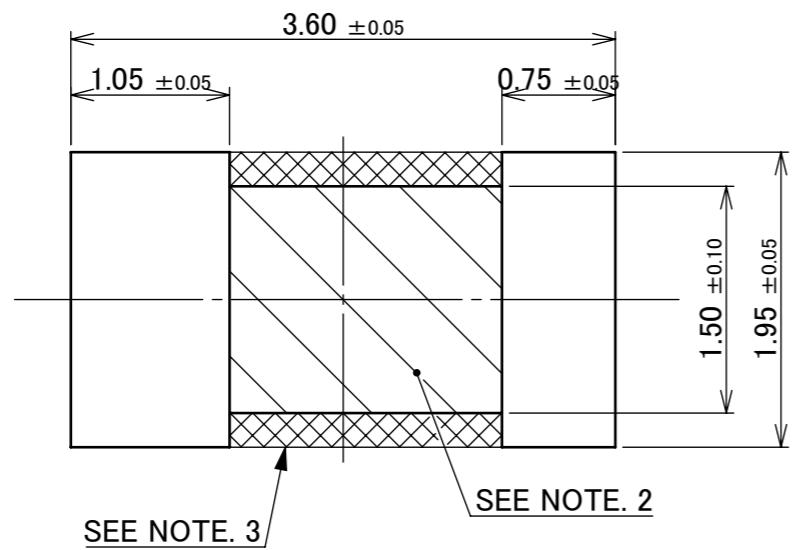


RECOMMENDED FOOTPRINT PATTERN

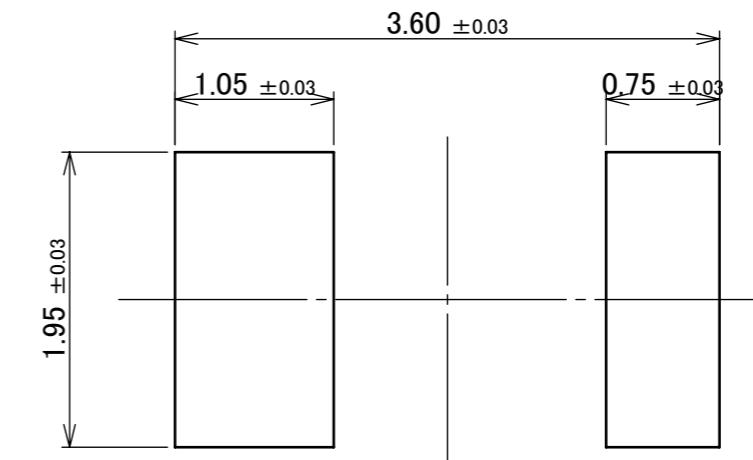

METAL MASK

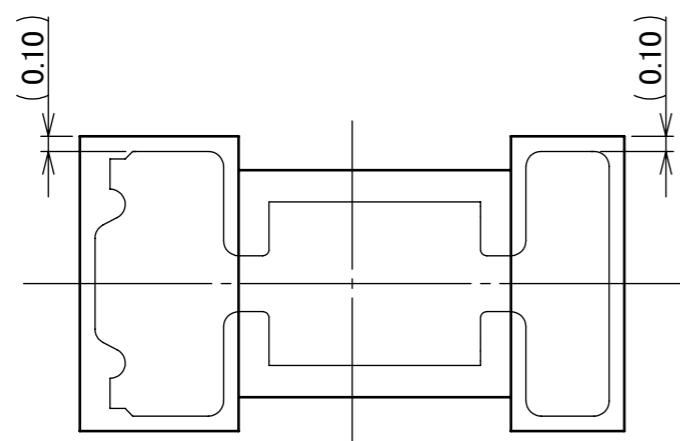

CONNECTOR ON RECOMMENDED FOOTPRINT PATTERN

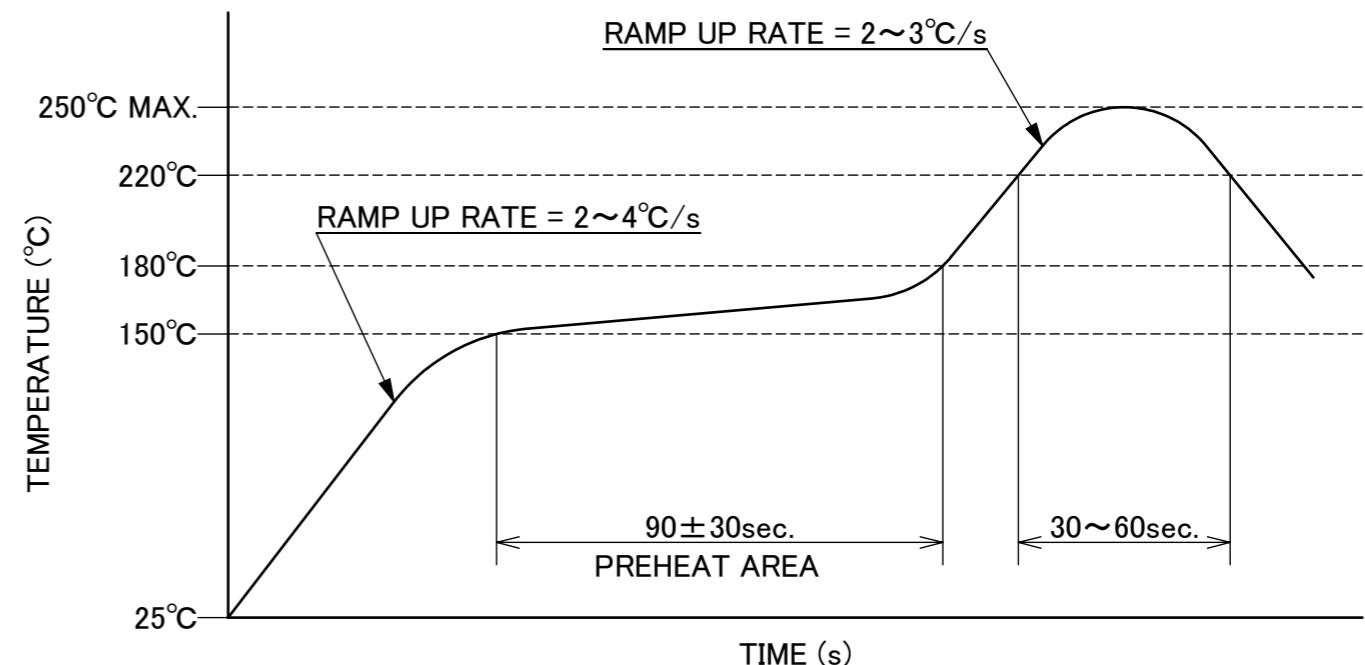

REFLOW TEMPERATURE PROFILE  
SENJU METAL INDUSTRY CO., LTD. : M705-SHF(Sn96.5 Ag3.0 Cu0.5)

NOTES.  
2. PATTERN AND RESIST PROHIBITION AREA.  
3. THIS AREA CANNOT MOUNT ANOTHER COMPONENTS.

ANGLE $\pm 2^\circ$	6 OVER 30 MAX. $\pm 0.3$	PROJECTION	SERIES No.	CUSTOMER COPY
6 MAX. $\pm 0.2$	30 OVER 120 MAX. $\pm 0.5$		R0	
GENERAL TOLERANCE.				
DWG.	DATE	TITLE	SCALE	
CHK.		MP-A 03	20:1	
APP.	DWG. No.	3186	UNIT	I-PEX
			mm	
			SIZE	
			A3	
			4/5	REV.
				2

PART NO.	QTY. PER EMBOSSED REEL (PIECES / REEL)	QTY. PER PACKING CARTON (REELS / CARTON)
3186-0001	10,000 / REEL	10 REELS / CARTON = 100,000

