

AP-TSS10, AP-LT10

High current (32 A), high temperature (125 °C) Spacer/Power Terminal, PCB SMT Terminal, easily operate with SMT and M3 (8.00 mm) screws

Product Specifications:

Product name		AP-TSS10 / AP-LT10
Parts number and name		3782-0002 (AP-TSS10) 3571-0081-04T (AP-LT10)
Size (mm)	Height (mm)	8.00 mm (AP-TSS10)
		1.00 mm (AP-LT10)
	Width (mm)	φ7.00 ± 0.10 mm (AP-TSS10) φ8.20 ± 0.10 mm (APLT-10)
Mating Type		Vertical (M3 thread screw)
Plating Type		Sn / Ni plating
Packing standard		EMBOSS


* Please inquire for height range, size and current amperage.

Product Specifications:

Amperage	32A DC
Operating Temperature	-40 - 125°C
Contact resistance	1.0 mΩ Max.




High current (32 A), high temperature (125 °C) Spacer/Power Terminal, and PCB SMT Terminal

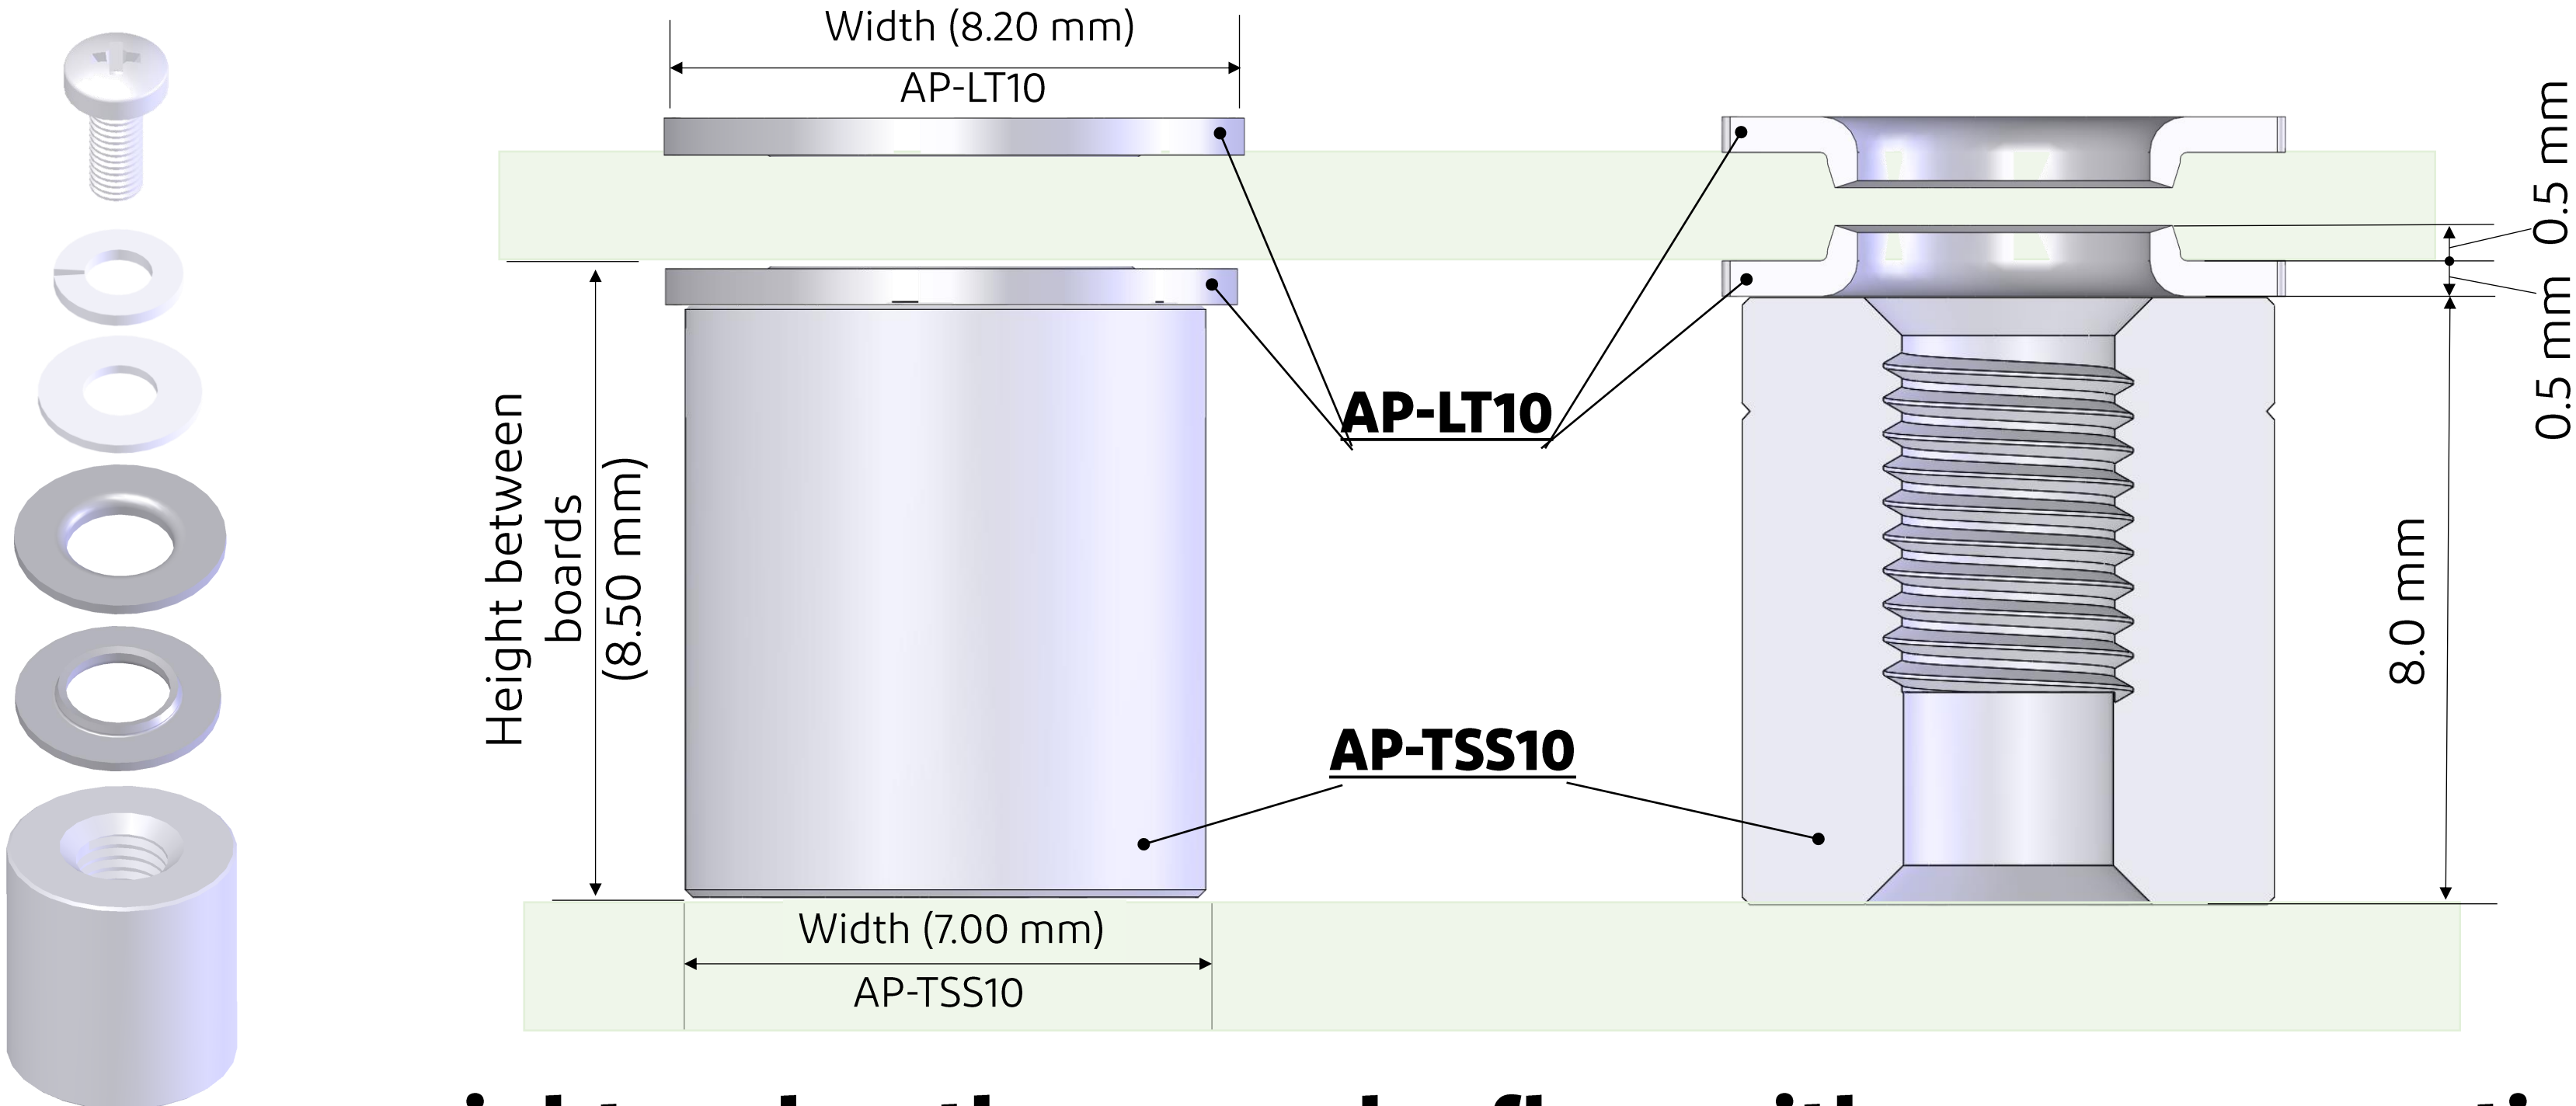

Reduced connector weight makes the second reflow with reverse mounting possible contributing to a flexible SMT design

	Connector structure	1 st mounted reflow	2 nd reverse mounted reflow
Brass	Material Brass : weight 8.5 Layer plating Nickel Over Plating Tin-Plating		
Aluminum	Material Aluminum : weight 2.8 Layer plating Nickel Over Plating Tin-Plating Weight ratio: 67% down		




Special size available upon request

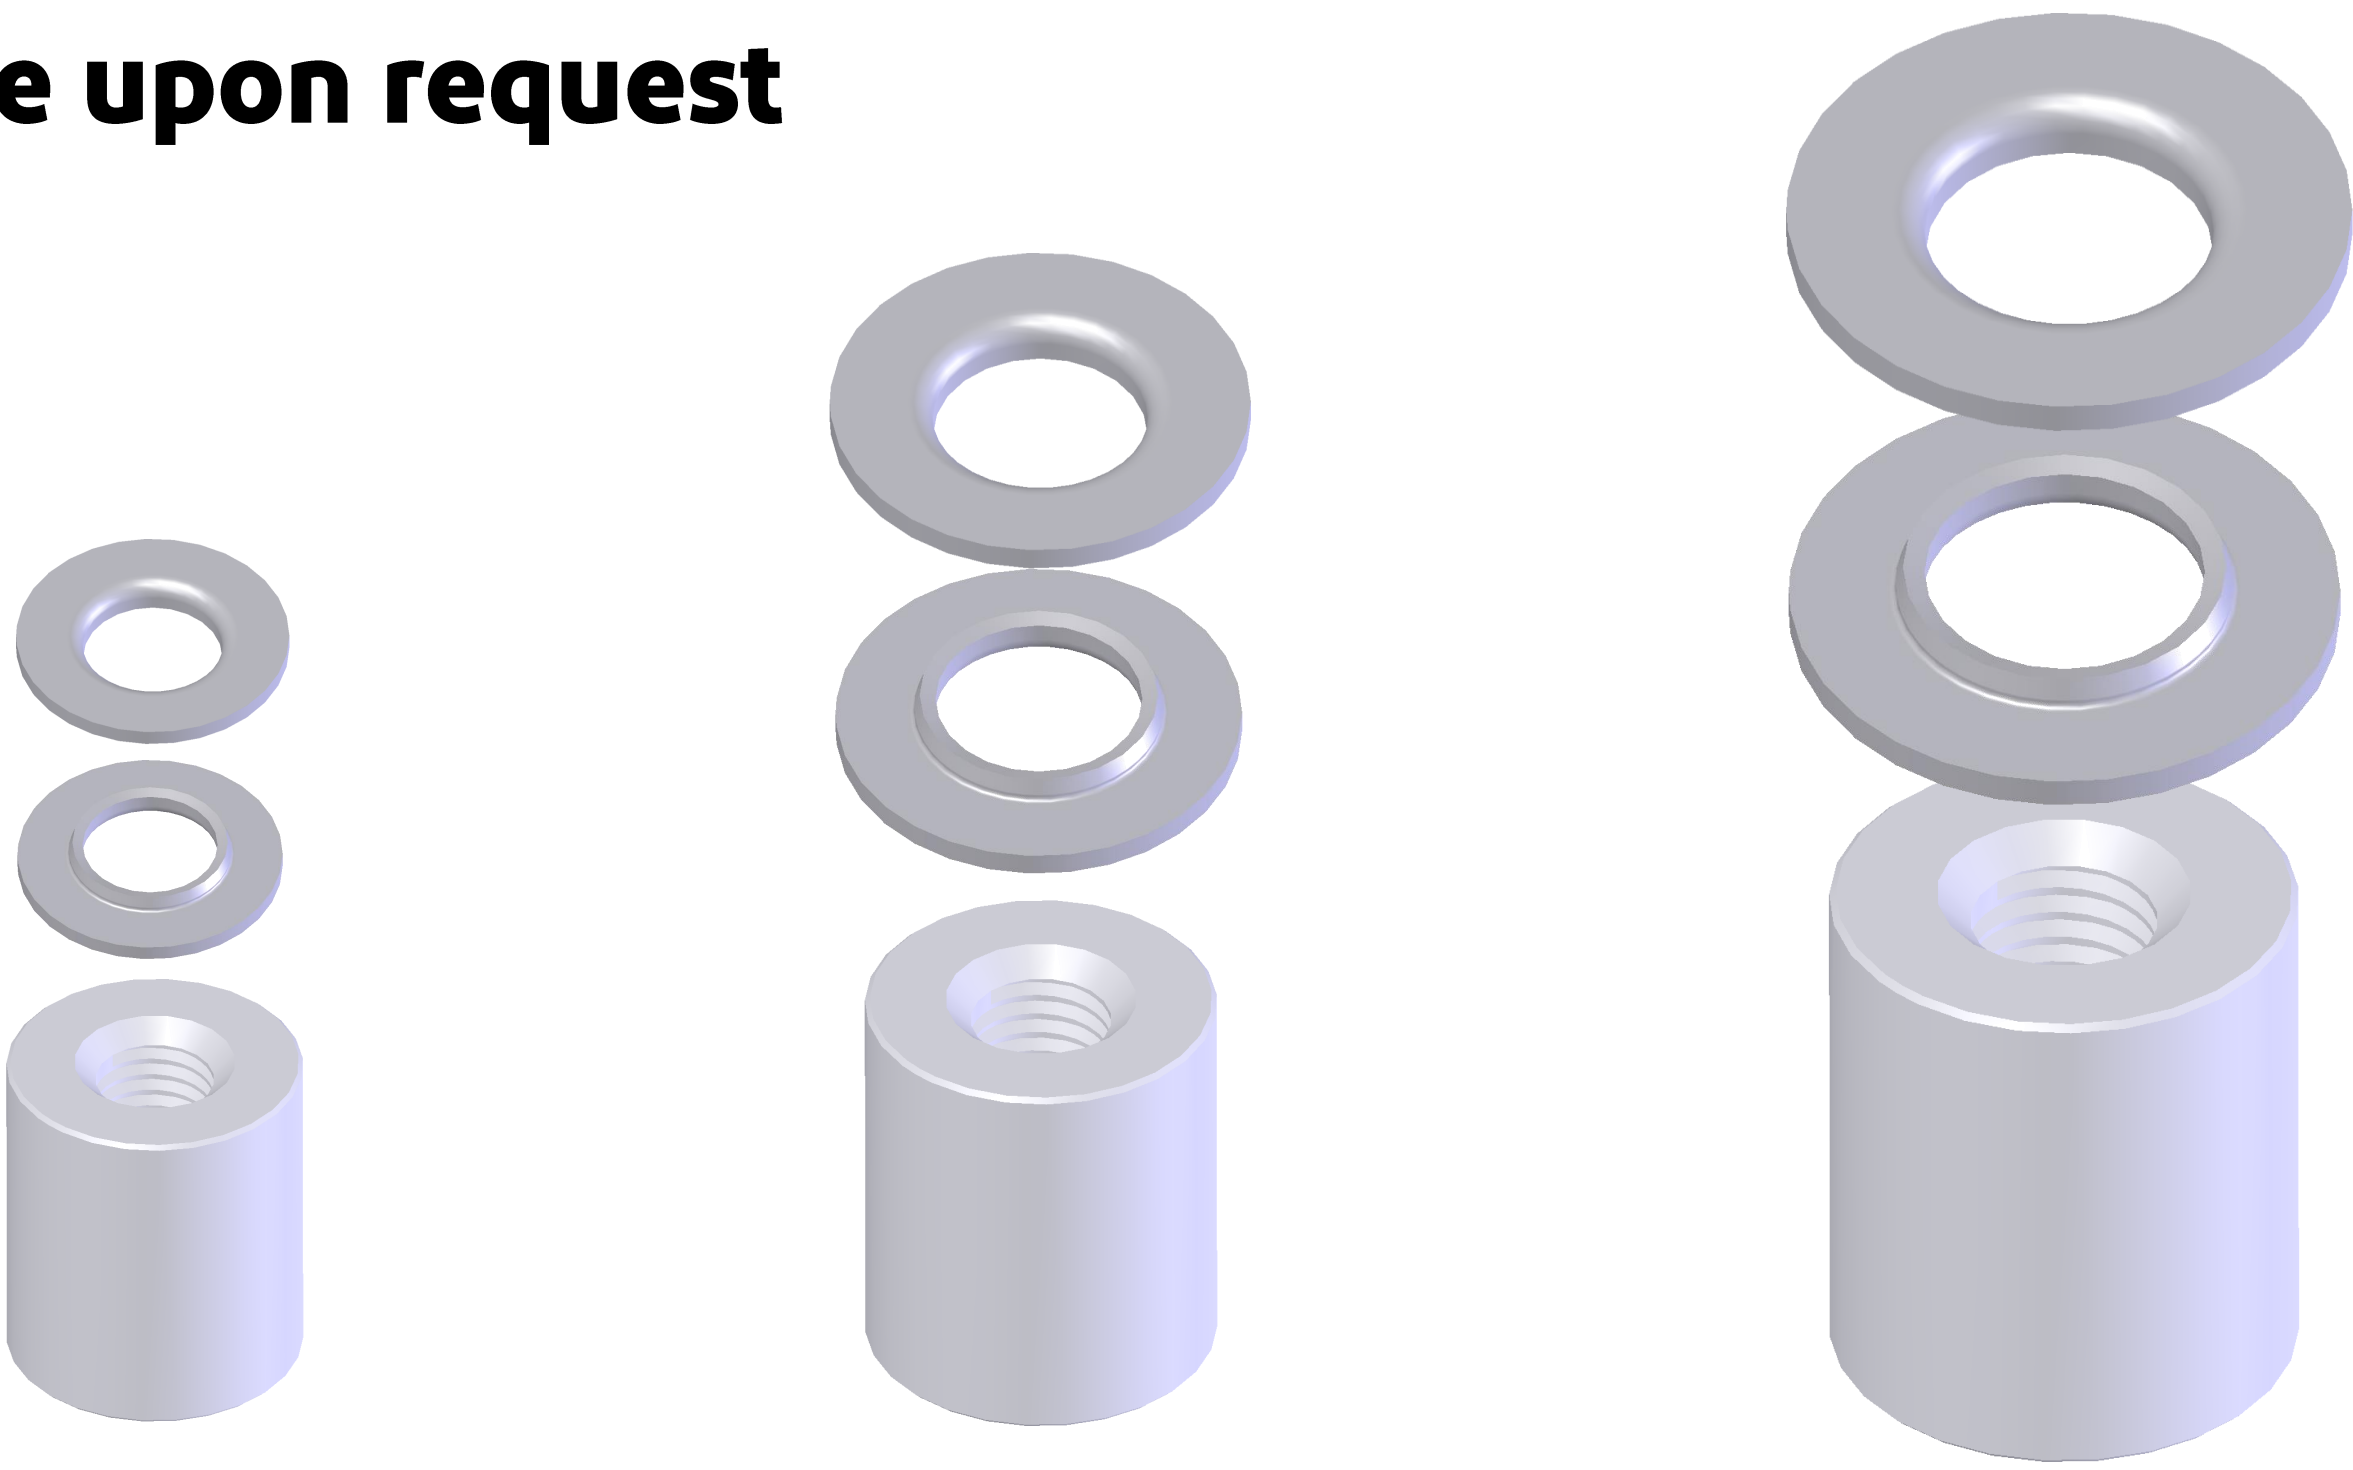


Component Parts Details

AP-TSS10

Recommended P/N	3782-0002
PART No.	3782-0002

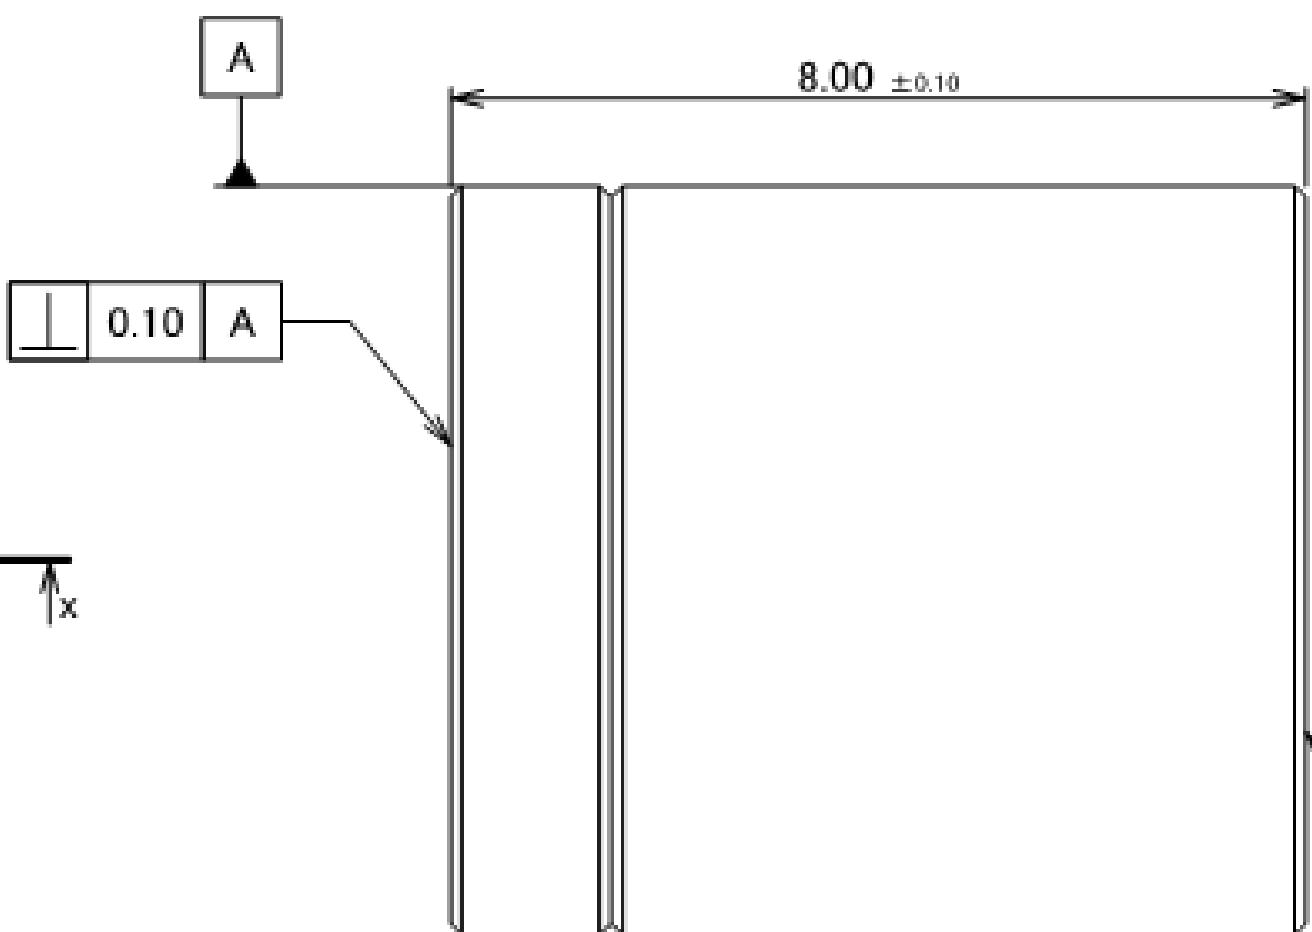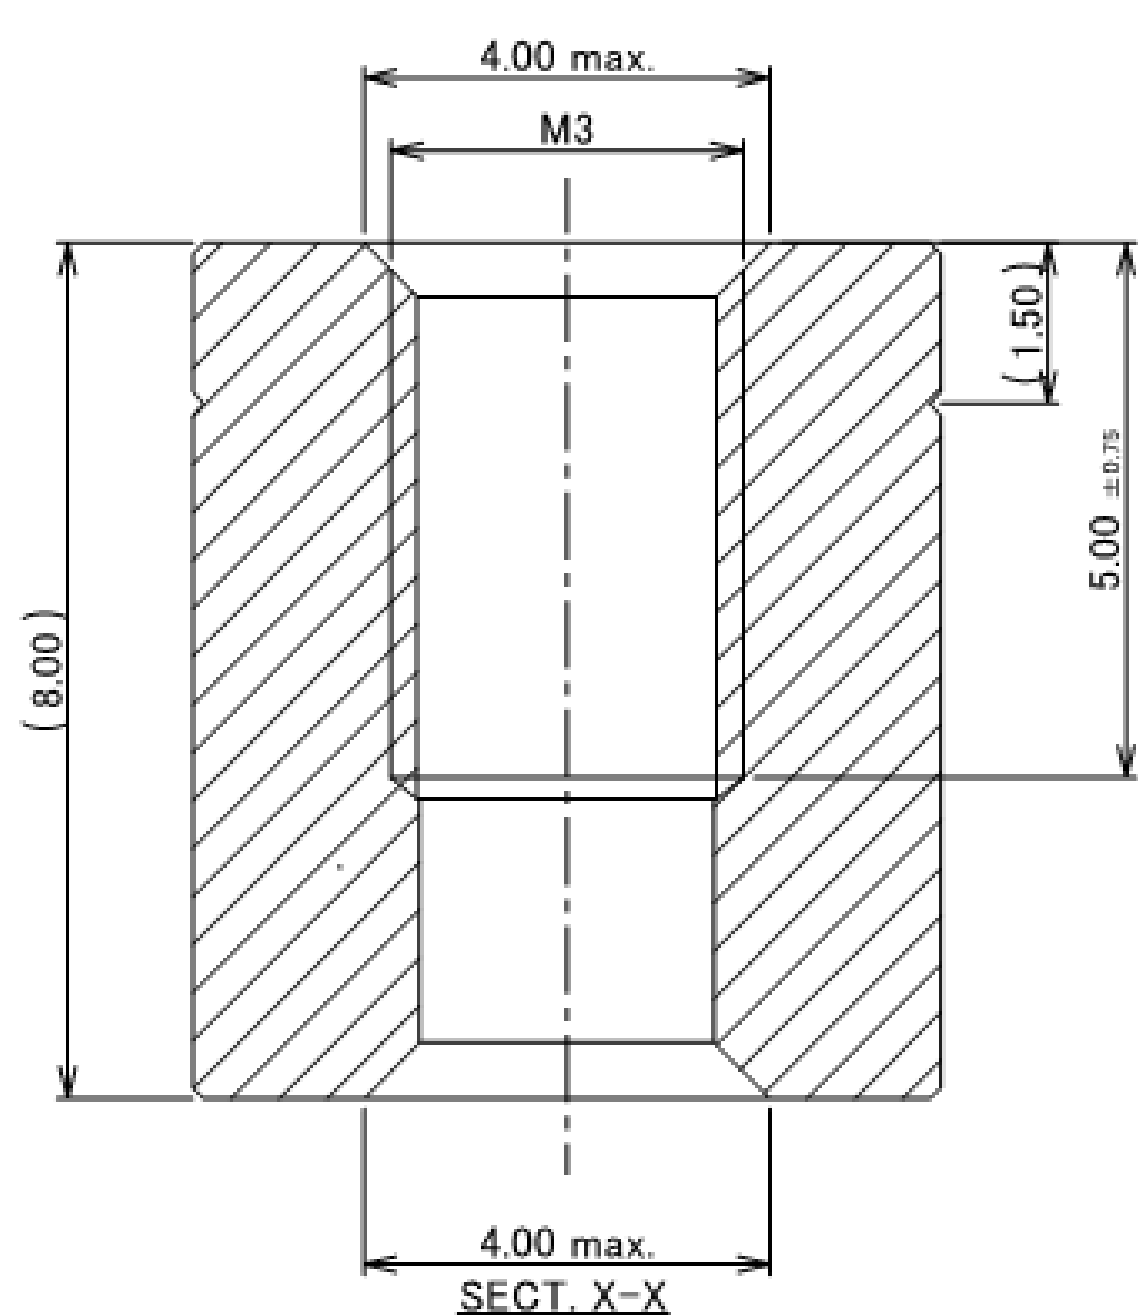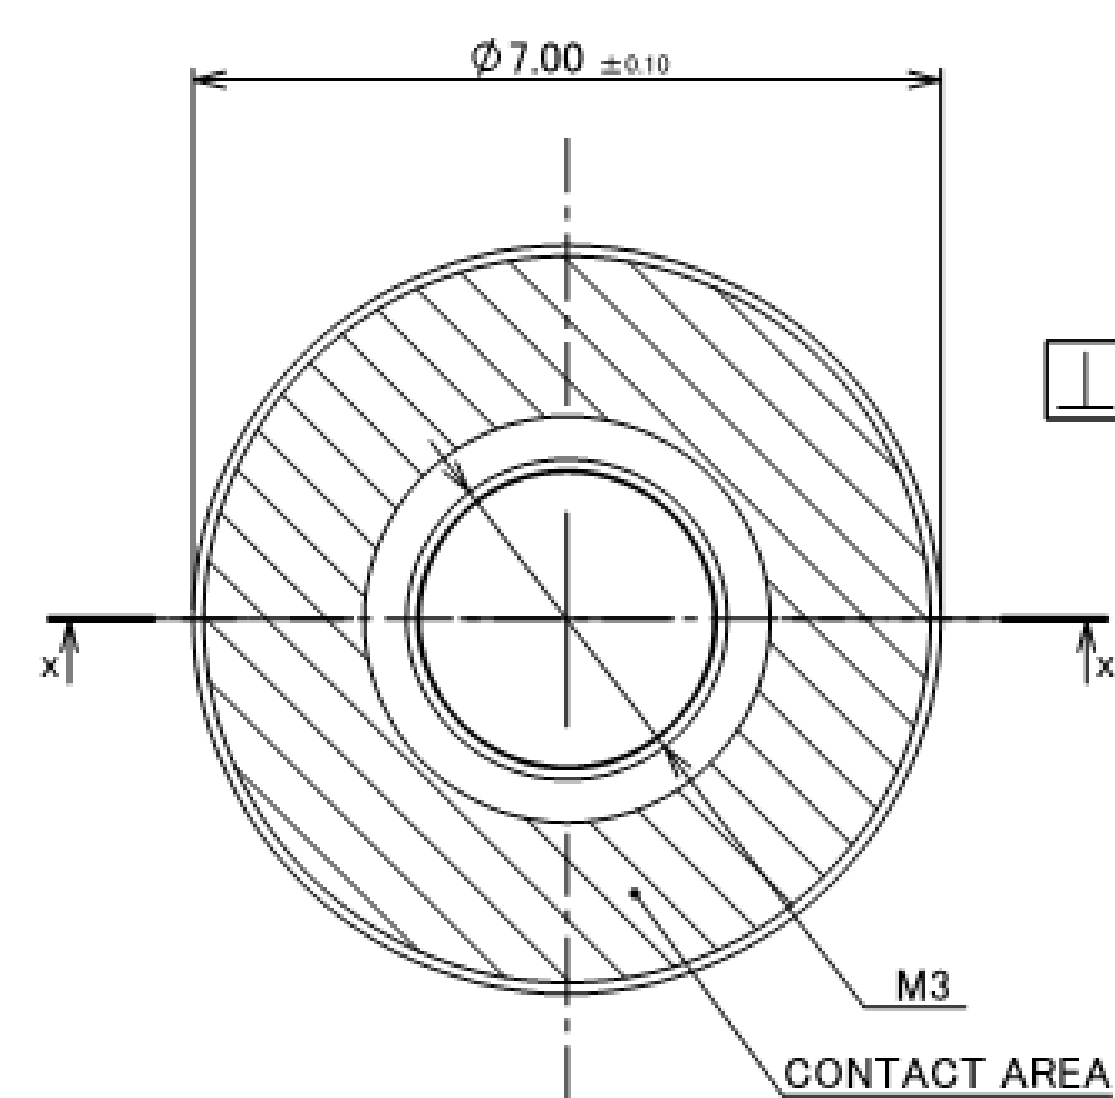


IATF 16949 Certified

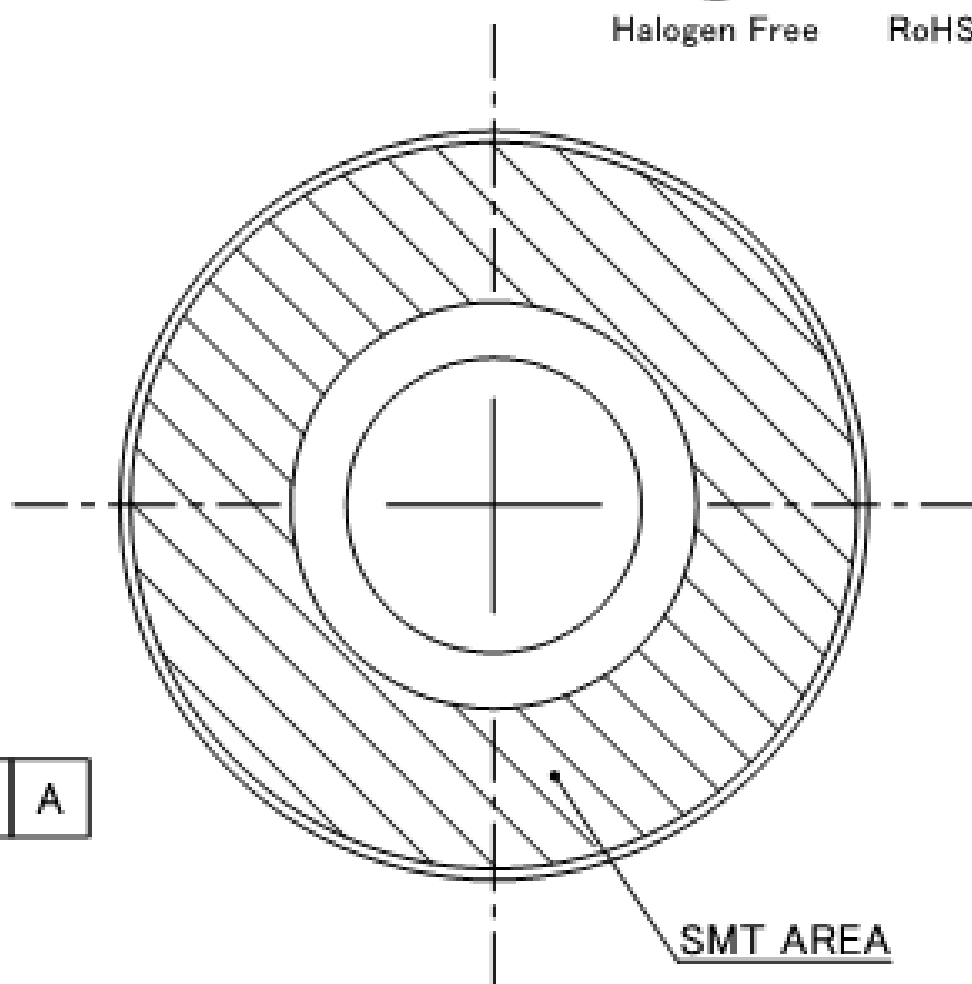


NOTES.
1. APPLICABLE CONNECTOR
AP-LT10 (P/N: 3571-0081-04T)

1	TERMINAL	ALUMINUM	[CONTACT AREA, SMT AREA]
NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS


AP-TSS10

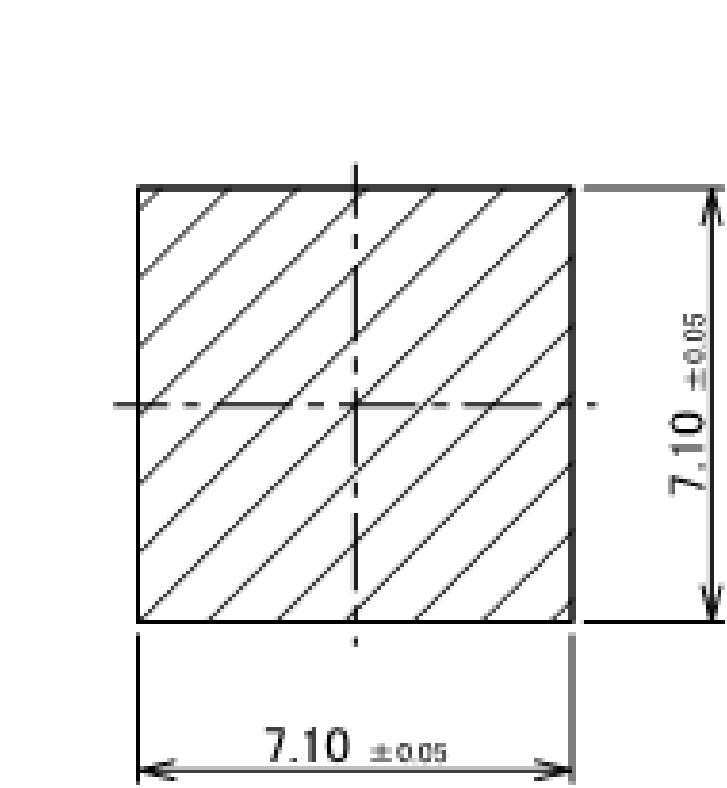

RECOMMENDED PCB LAYOUT

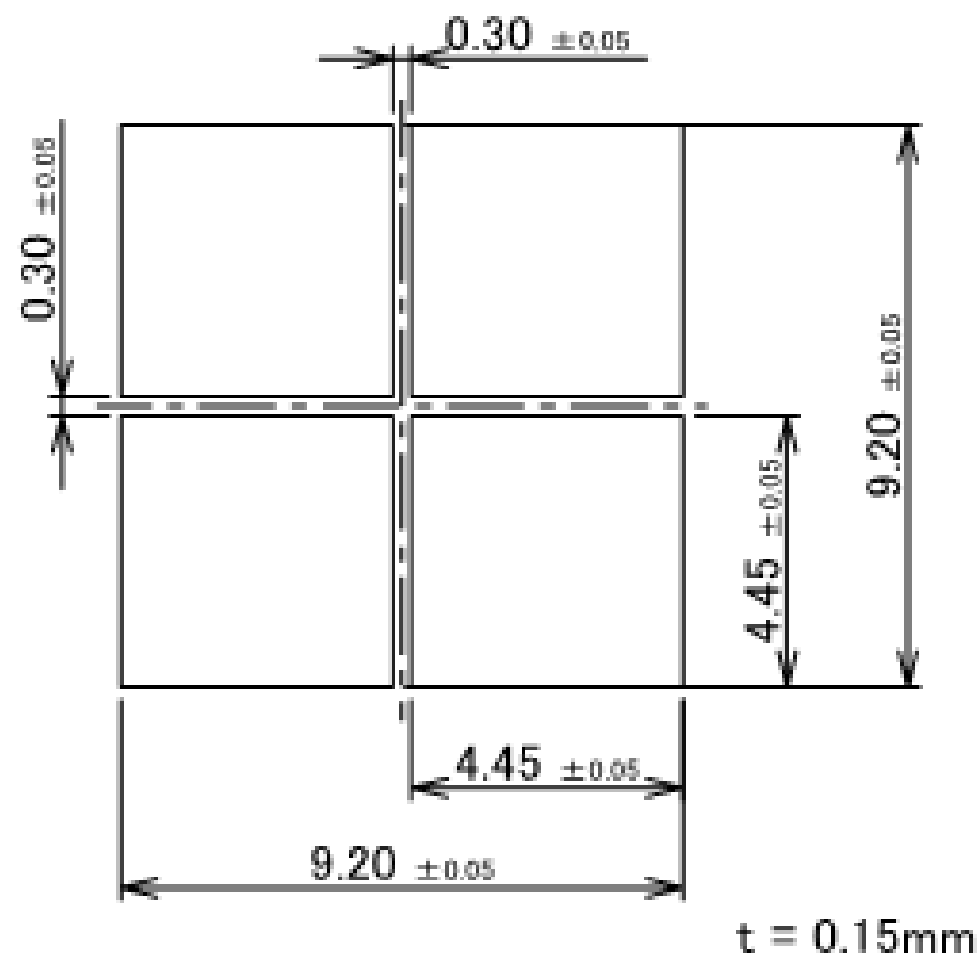

RECOMMENDED METAL MASK LAYOUT

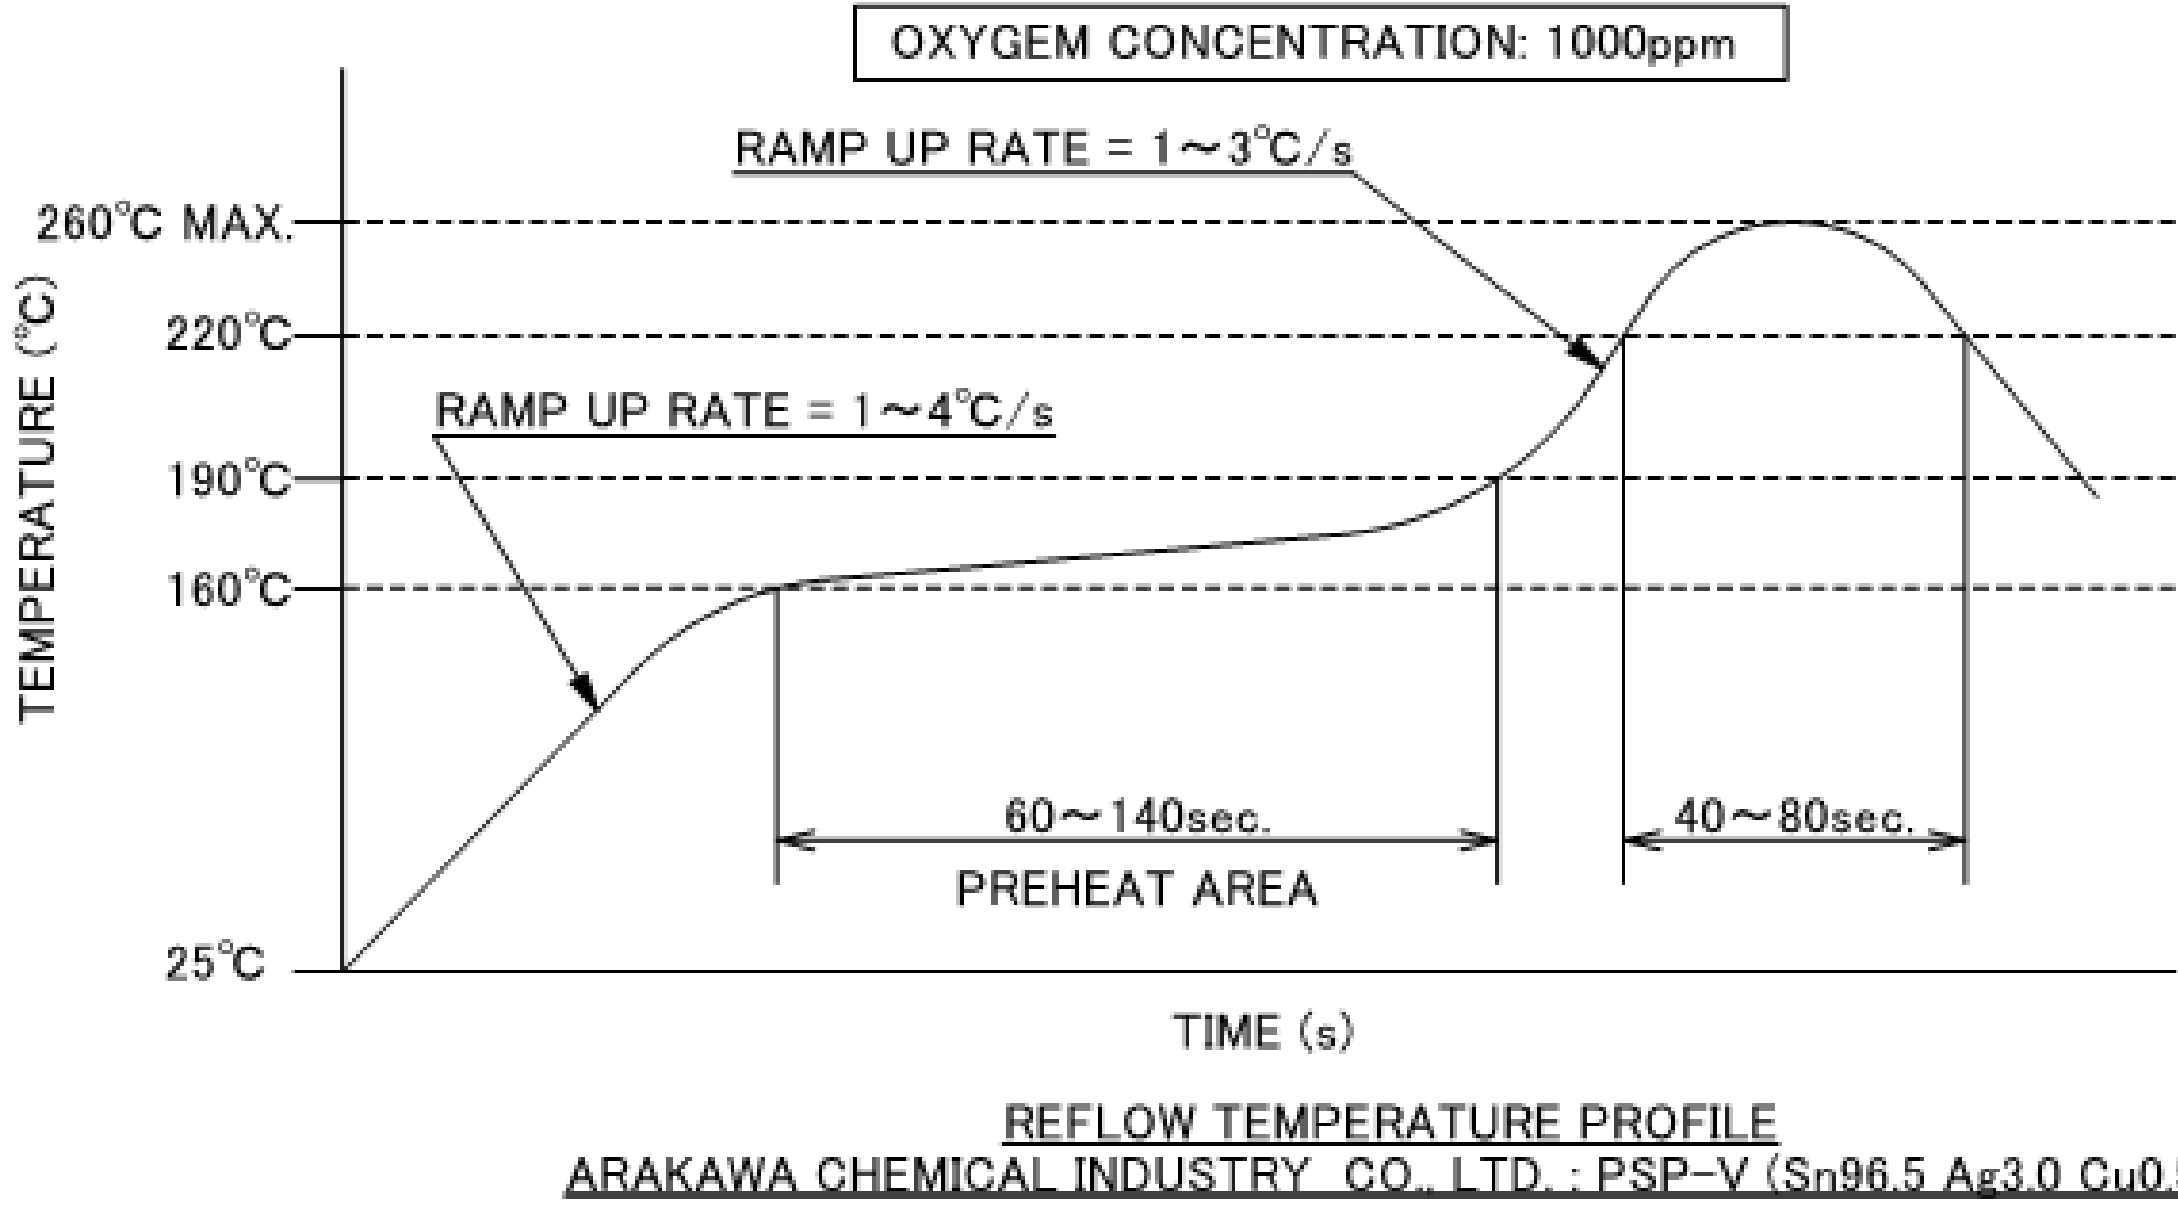


Rev.2

ITEMS	SPECIFICATION
RATING VOLTAGE	32A DC
OPERATING TEMPERATURE	233~398K(-40°C~+125°C)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
CONTACT RESISTANCE	INITIAL : 1.0mohm MAX. / AFTER TEST : 1.0mohm MAX.
SCREW TIGHTENING TORQUE	0.75~0.93 Nm(REFERENCE)
PRODUCT SPECIFICATION	PRS-2845
TEST REPORT	TR-23036
PACKING STANDARD	PST-23063
APPEARANCE CRITERIA No.	QLS-A***

Rev.2

AP-LT10

Recommended P/N	3571-0081-04T
PART No.	
3571-0081-04T	

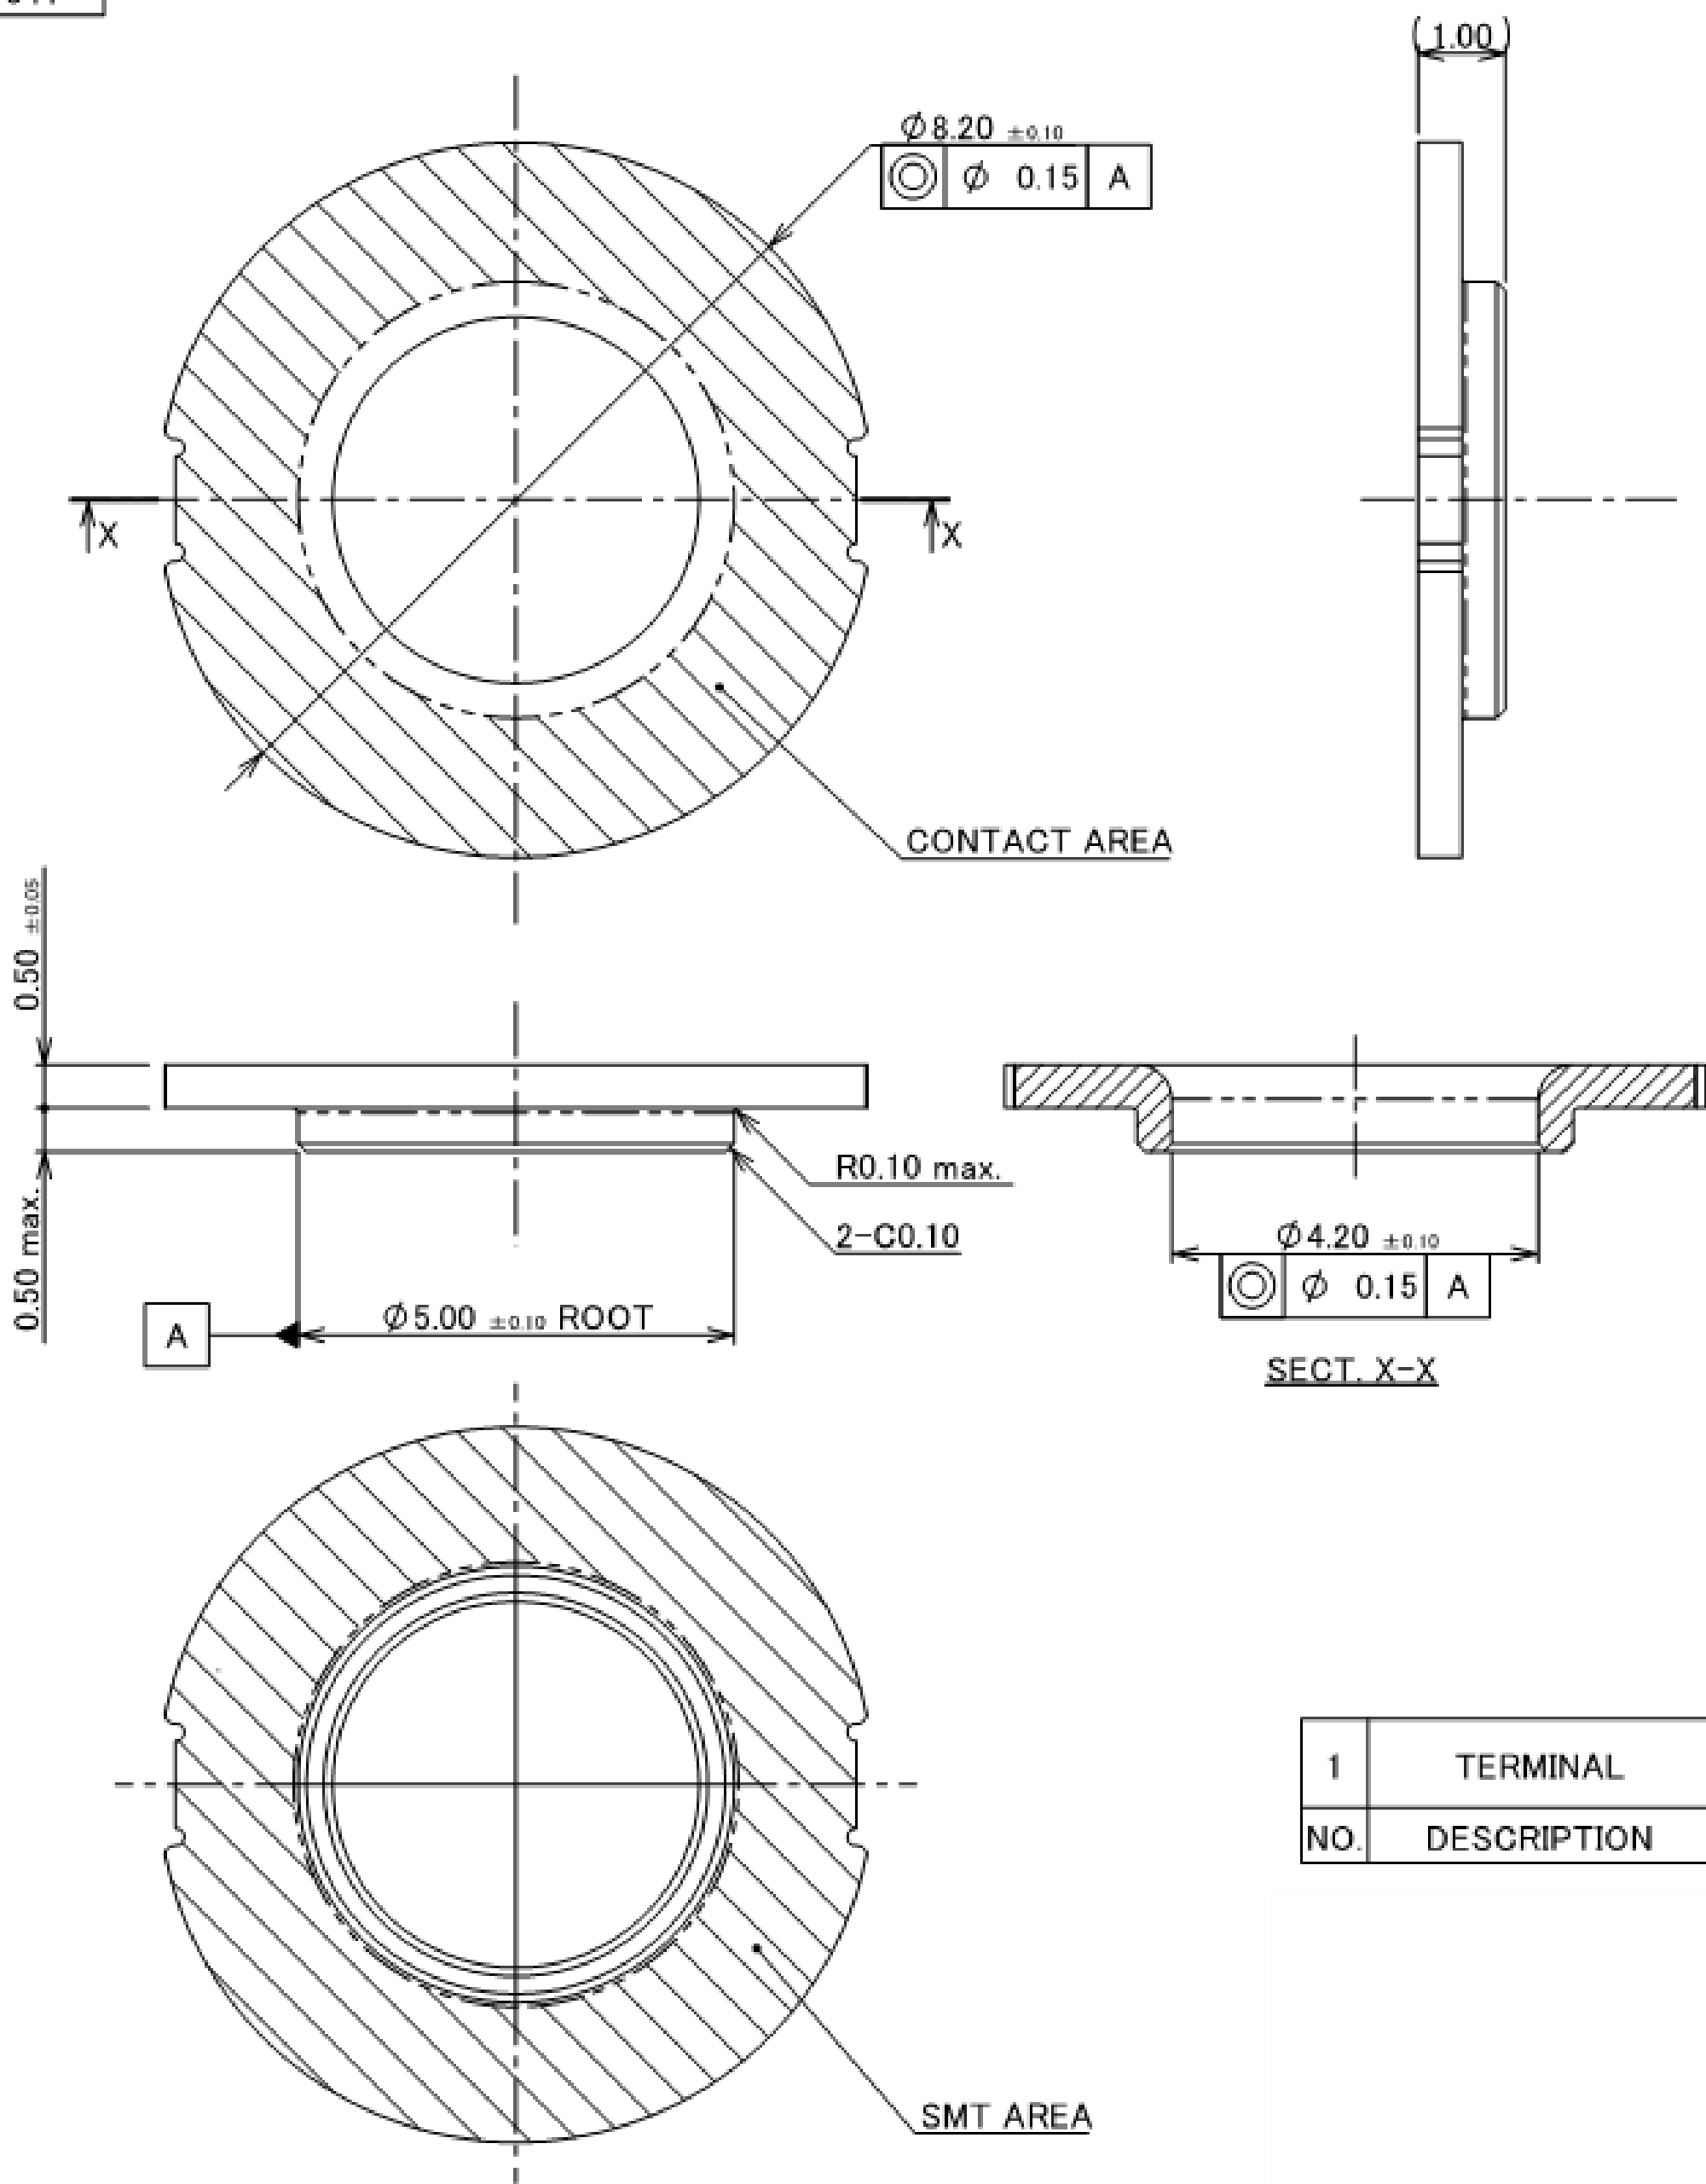



IATF 16949 Certified



NOTES.
1. APPLICABLE CONNECTOR
AP-TSS10 (P/N: 3782-0002)

1	TERMINAL	BRASS	【CONTACT AREA, SMT AREA】 PLATING: Sn 1.0~5.5 μ m OVER Ni 1.0~5.5 μ m
NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS

Rev.1

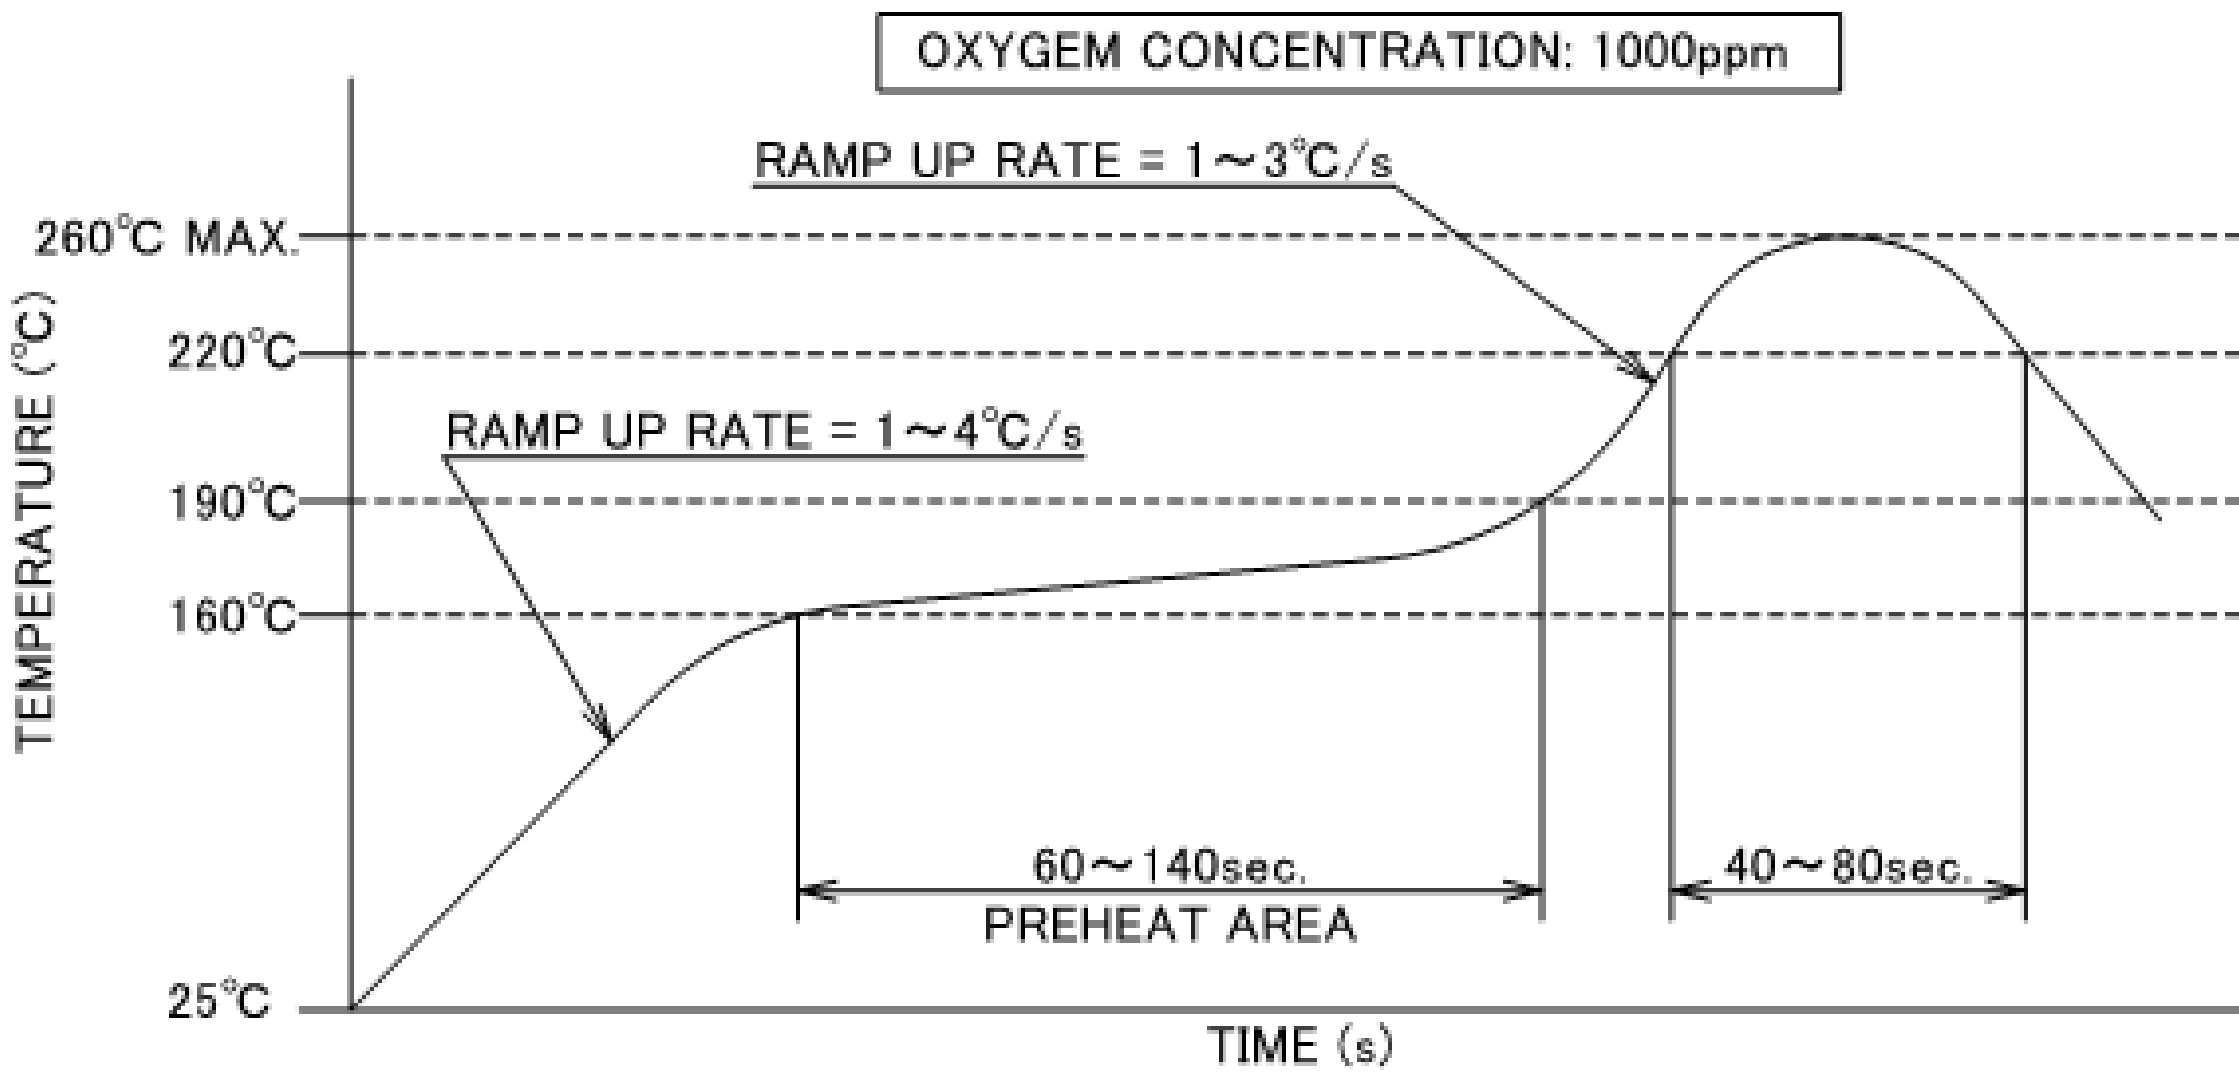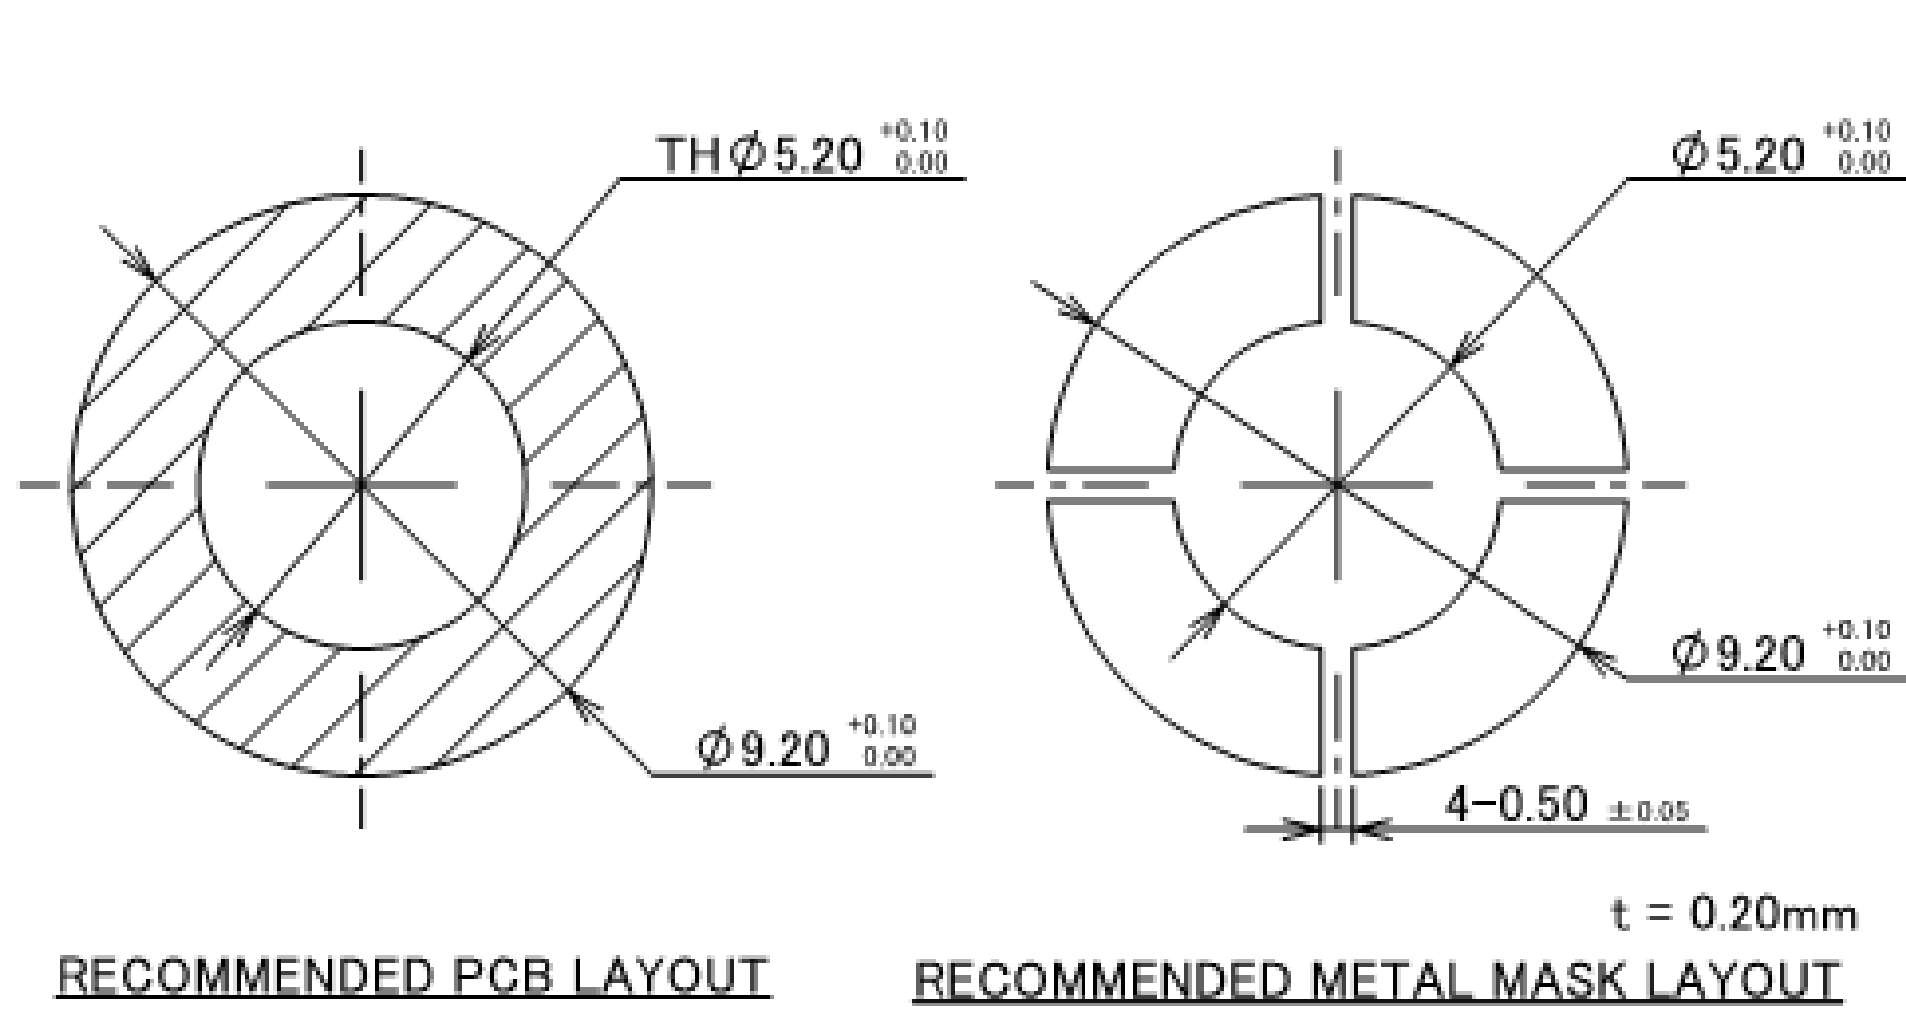

REFLOW TEMPERATURE PROFILE
ARAKAWA CHEMICAL INDUSTRY CO., LTD. : PSP-V (Sn96.5 Ag3.0 Cu0.5)

Rev.1

AP-LT10

ITEMS	SPECIFICATION
RATING VOLTAGE	32A DC
OPERATING TEMPERATURE	233~398K(−40℃~+125℃)
OPERATING HUMIDITY	85% MAX.(NON-CONDENSING)
CONTACT RESISTANCE	INITIAL : 1.0mohm MAX. / AFTER TEST : 1.0mohm MAX.
SCREW TIGHTENING TORQUE	0.75~0.93 Nm(REFERENCE)
PRODUCT SPECIFICATION	PRS-2845
TEST REPORT	TR-23036
PACKING STANDARD	PST-23064
APPEARANCE CRITERIA No.	QLS-A***

Rev.1

Custom Connectors Available



RF Connectors

MHF® series




Micro-Coaxial/Twinaxial Connectors

CABLINE® series



Wire-to-Board Connectors/ Terminals

AP series

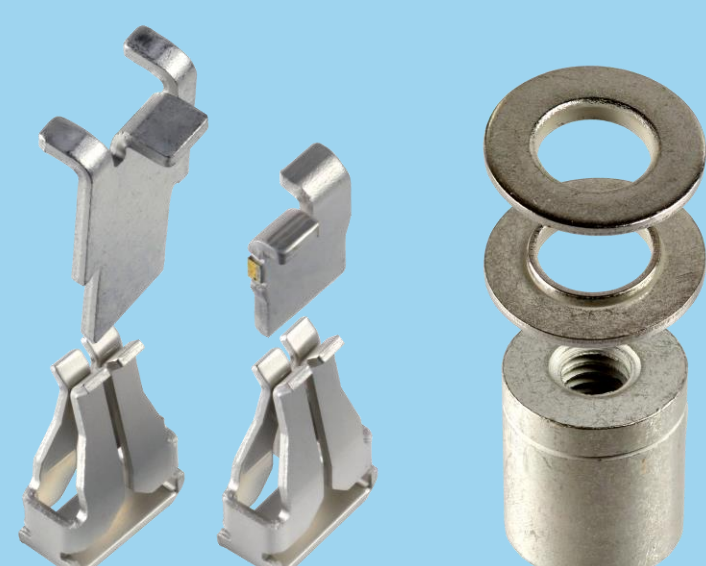


ISH® series



FPC/FFC Connectors


MINIFLEX® series EVAFLEX® series

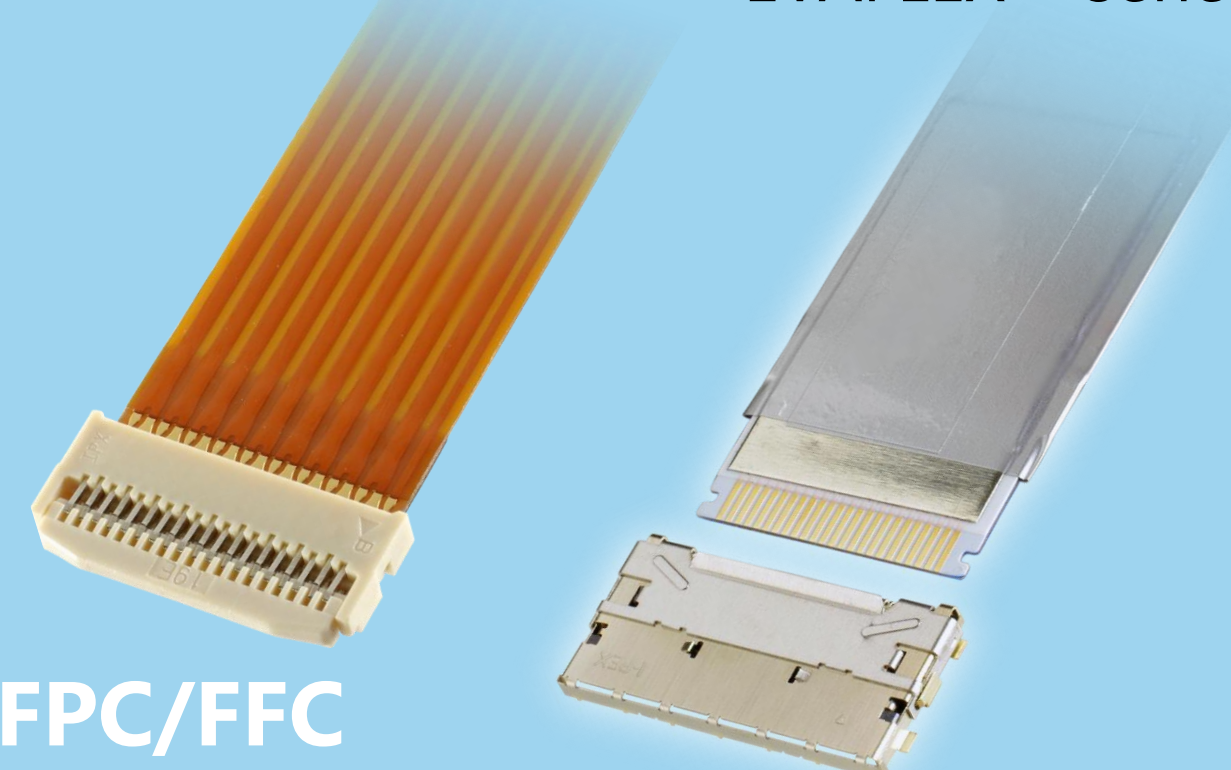

NOVASTACK® series



MINIDOCK™ series

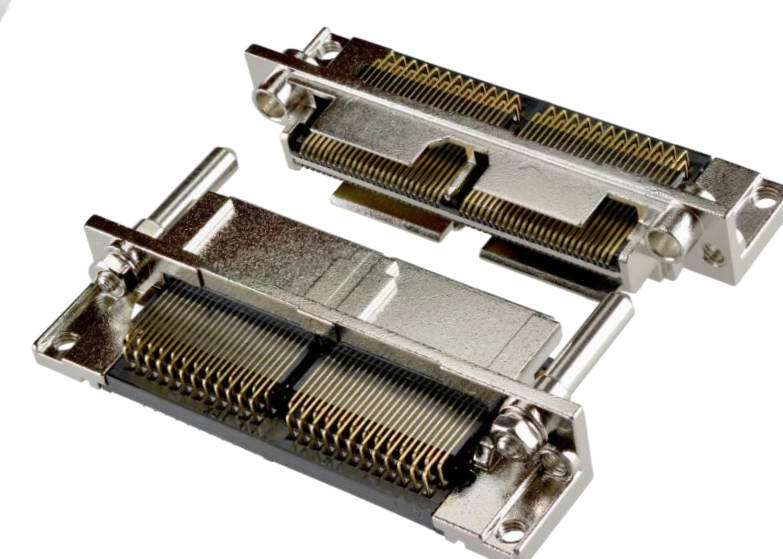

Board-to-Board Connectors



Inquiry



I-PEX, MHF, CABLINE, NOVASTACK, ISH, IARPB, MINIFLEX, EVAFLEX, MINIDOCK, i-Fit and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update Information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative
or more detailed information.

www.i-pex.com



I-PEX

© I-PEX Inc. 2026
All rights reserved