


# CABLINE® -UMF

全屏蔽設計和多點接地設計，機械鎖扣，高速數據傳輸(40 Gbps/lane PAM3), 0.4 mm間距, 90 度出線垂直插拔款的FPC連接器

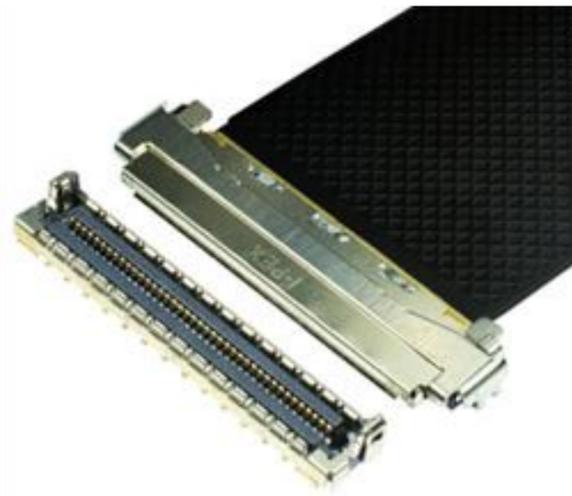

**Product Specifications:**

Mating Type	Vertical (Right Angle)	
Board Pitch	0.4 mm	
Wiping Length	0.65 mm min.	
Mated Size	Height	2.2 +/- 0.15 mm
	Width	5.0 + (0.4 x pin count) mm
	Depth	5.0 mm
Pin Counts	Range	Up to 70
	Available	40, 70

**Applicable FPC:**


FPC Type	Shielded FPC / Non-shielded FPC
FPC Thickness	Contact Area: 0.34 +/-0.04 mm
	Ground Area: 0.34 +/-0.04 mm

**Applicable Standards (Reference Only):**

USB4 Gen4 (40 Gbps/Lane PAM3), DP UHBR20 (20 Gbps/Lane)
------------------------------------------------------------


\*若有規格外 Pin 數需求,請與當地負責業務窗口聯繫。

## ▶ ZenShield® 的全屏蔽設計和多點接地結構, EMC 解決方案的理想選擇

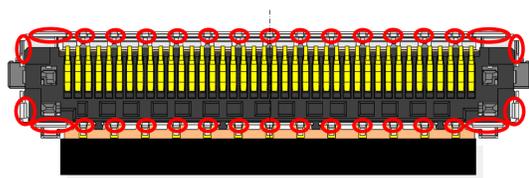

底部視圖

○ Ground SMT points

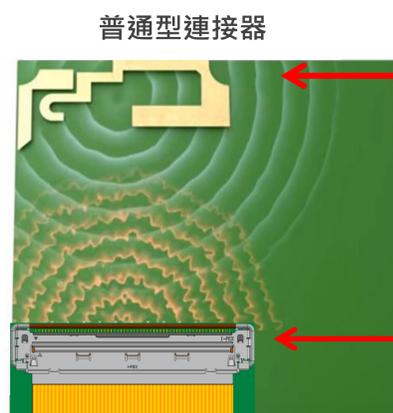

普通型連接器

Wi-Fi 天線

高速訊號傳送




ZenShield® 全屏蔽式連接器


連接器可以放置於更靠近天線的位置

## ▶ 擁有鎖蓋以及0.65 毫米以上的有效嵌合長度，提供超高接觸可靠性

搭配金屬鐵蓋---增強連接器挾持力

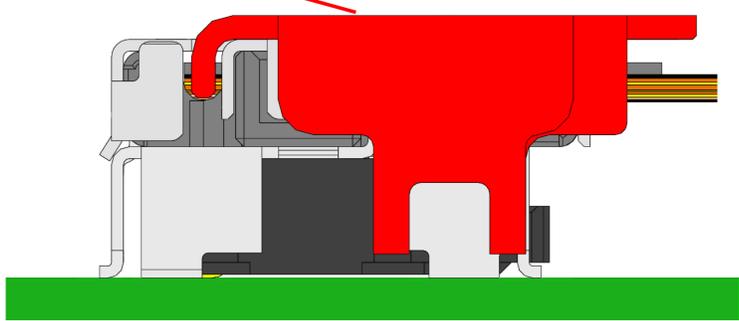


有效嵌合長度: 0.65mm min.

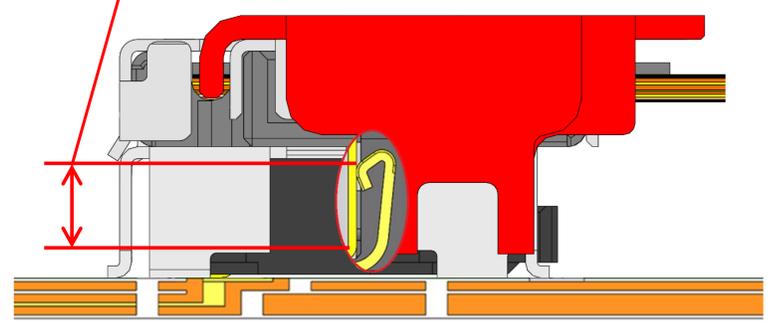

## ▶ 高速率傳輸, 40 Gbps/lane PAM3應用的理想選擇




**Simulation results**


Connector:  
PLUG: CABLINE-UMF  
RECEPTACLE: CABLINE-UM  
Pin Assignment: GSSGSSG

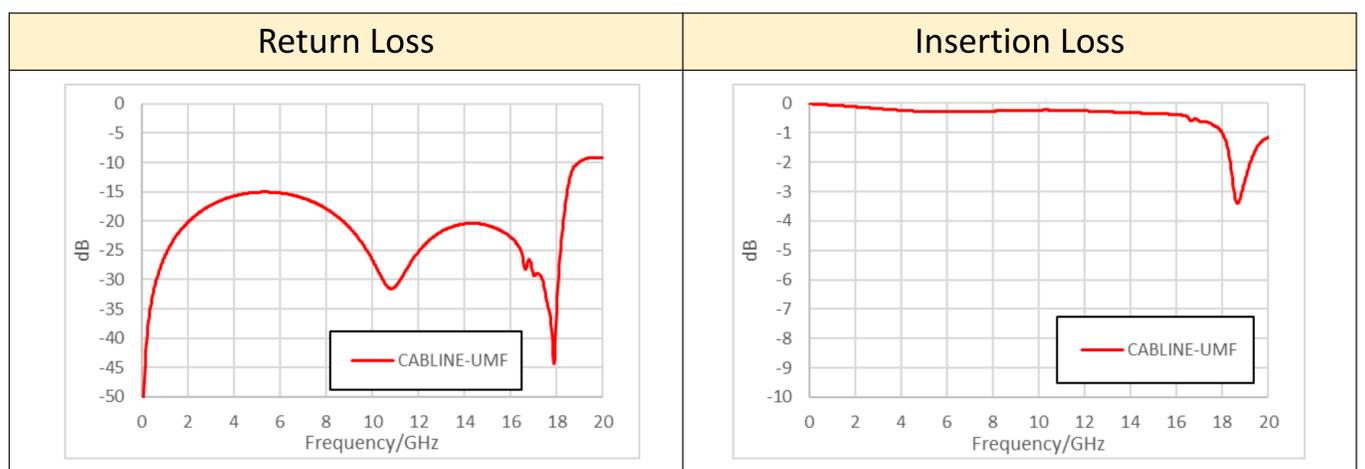

# Component Parts Details






## Component Parts

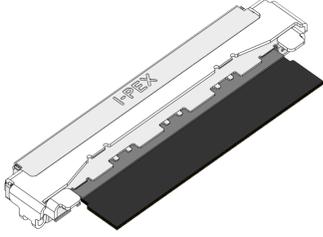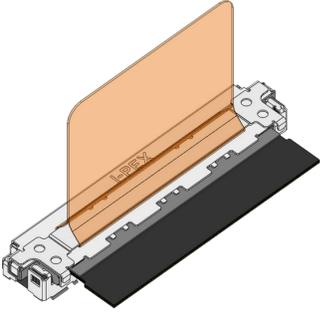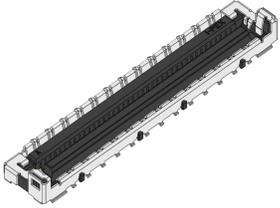Connector parts
 <p>PLUG(WITH LOCK COVER)</p>
 <p>PLUG(WITH PULL TAPE HOLDER)</p>
 <p>RECEPTACLE</p>

Plug parts
 <p>PLUG HOUSING ASSEMBLY</p>
 <p>PLUG SHELL-A</p>
 <p>PLUG LOCK COVER</p>
 <p>PLUG PULL TAPE HOLDER</p>

# Plug for Cable Assembly

Recommended P/N		21102-0**E-21				
PART NO.	Pos.	A	B	C	D	E
21102-040E-21	40	20.20	17.85	17.65	15.60	21.00
21102-070E-21	70	32.20	29.85	29.65	27.60	33.00

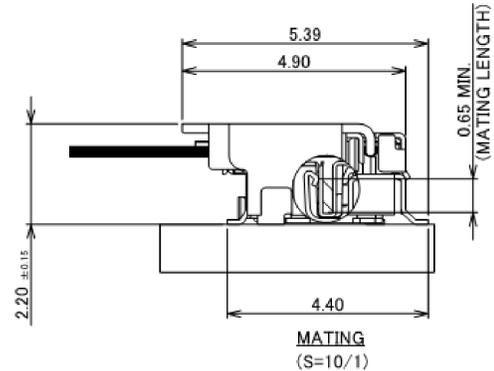

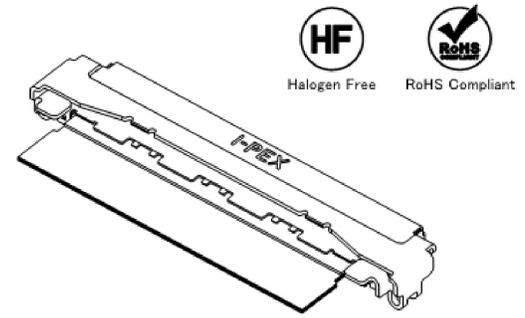
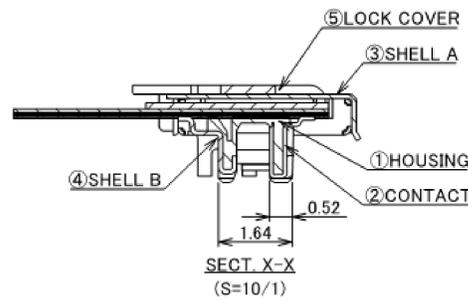
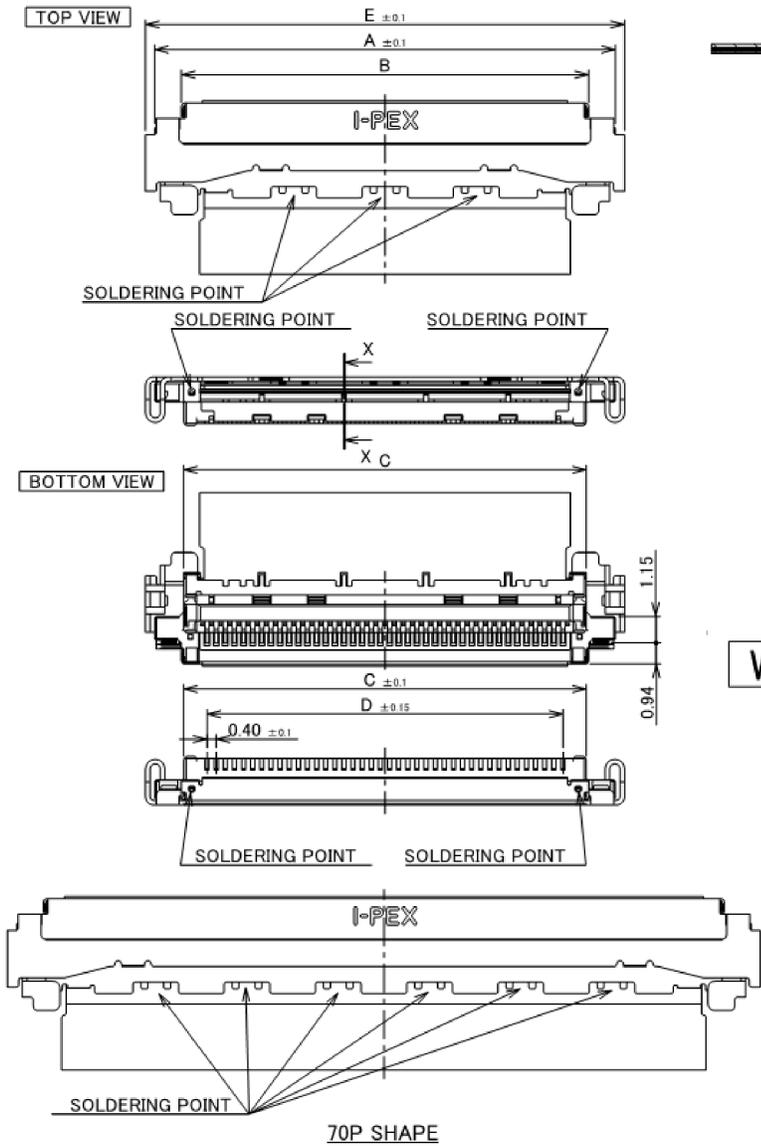


## With LOCK COVER

NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
5	LOCK COVER	PHOSPHOR BRONZE	ALL OVER Ni 1.0 μm MIN.
4	SHELL B	PHOSPHOR BRONZE	ALL Au 0.01 μm MIN. OVER Ni 1.00 μm MIN.
3	SHELL A	PHOSPHOR BRONZE	PARTIAL Au 0.003 μm MIN. OVER Ni 1.0 μm MIN.
2	CONTACT	CORSON ALLOY	ALL OVER Ni 1.00 μm MIN. CONTACT & SOLDERING AREA : Au 0.03 μm MIN.
1	HOUSING	LCP	UL94V-0 ,BLACK

Rev.0

Recommended P/N		21102-0**E-21			
PART NO.	Pos.	A	B	C	D
21102-040E-22	40	20.20	17.85	17.65	15.60
21102-070E-22	70	32.20	29.85	29.65	27.60

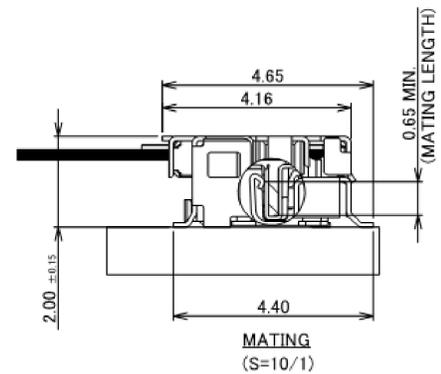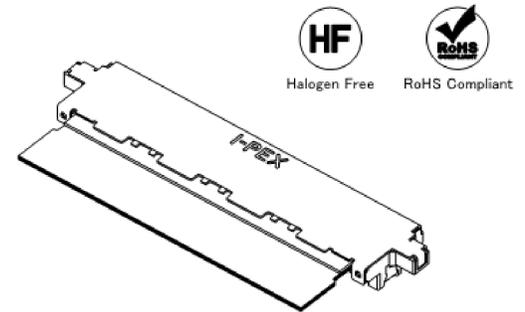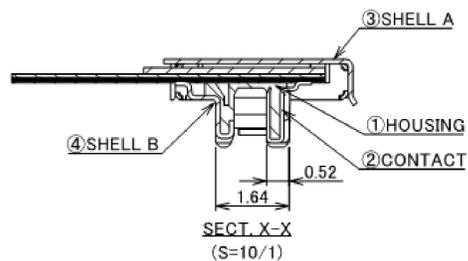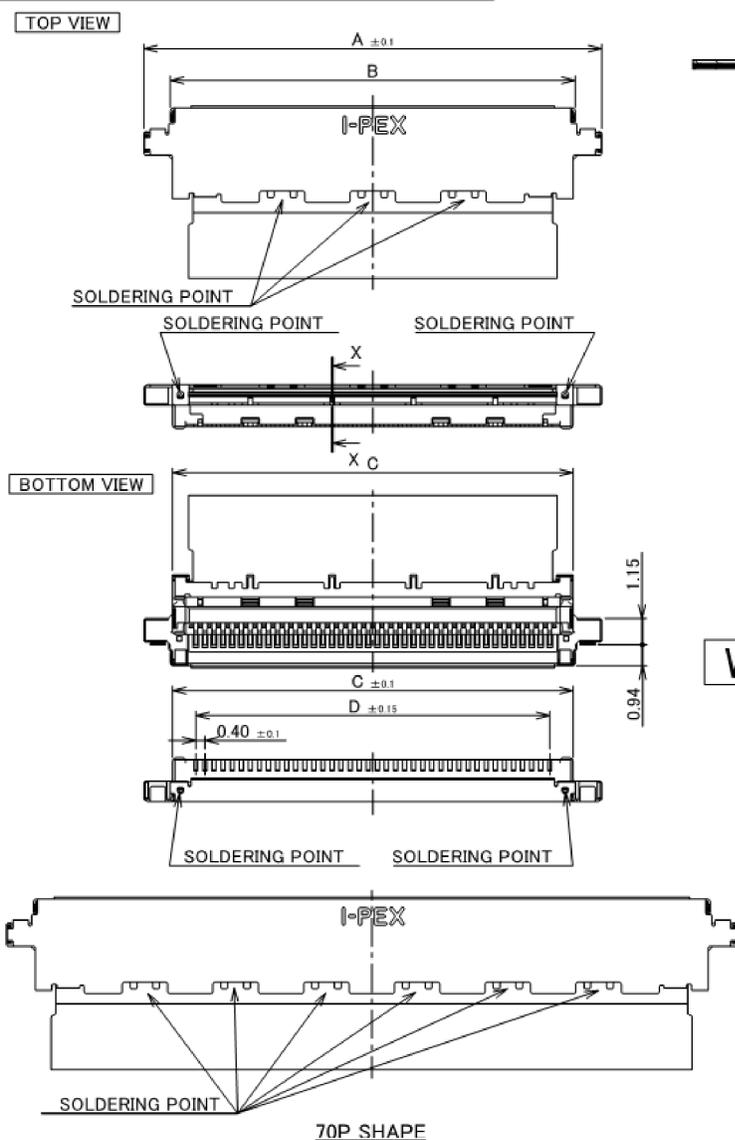


## Without LOCK COVER

NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
4	SHELL B	PHOSPHOR BRONZE	ALL Au 0.01 μm MIN. OVER Ni 1.00 μm MIN.
3	SHELL A	PHOSPHOR BRONZE	PARTIAL Au 0.003 μm MIN. OVER Ni 1.0 μm MIN.
2	CONTACT	CORSON ALLOY	ALL OVER Ni 1.00 μm MIN. CONTACT & SOLDERING AREA : Au 0.03 μm MIN.
1	HOUSING	LCP	UL94V-0 ,BLACK


Rev.0

# Plug for Cable Assembly

Recommended P/N		21102-0**E-21					
PART NO.	Pos.	A	B	C	D	L	M
21102-040E-23	40	20.20	17.85	17.65	15.60	13.00	14.00
21102-070E-23	70	32.20	29.85	29.65	27.60	25.00	26.00

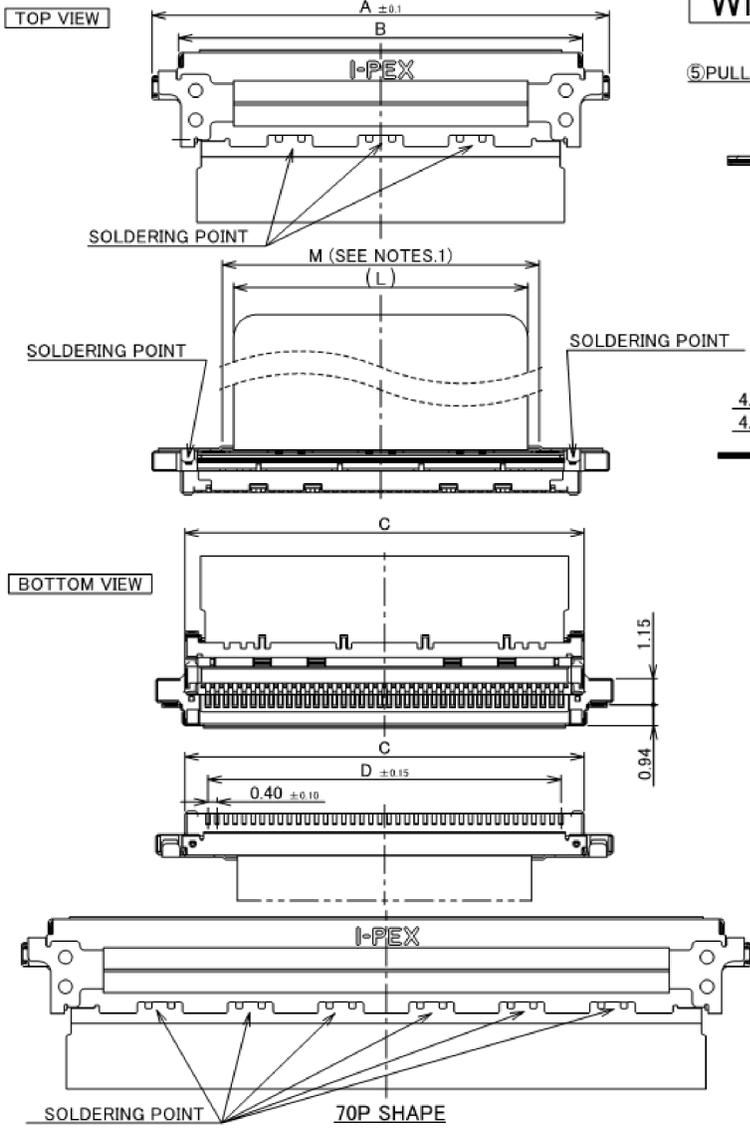

## With PULL TAPE HOLDER


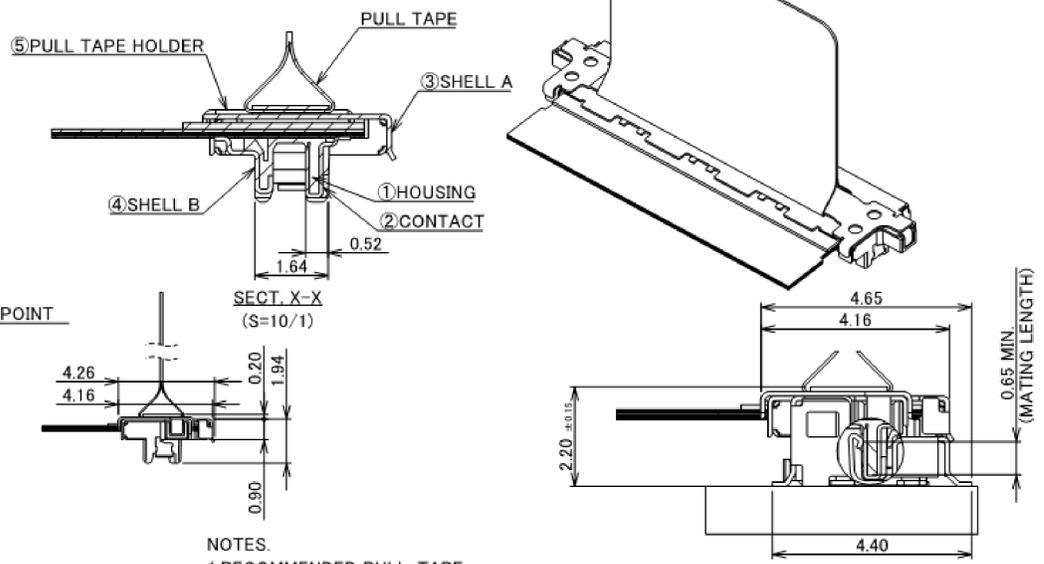


NOTES.  
 1. RECOMMENDED PULL-TAPE  
 PULL-TAPE : TERAOKA's INSULATION TAPE No.650S(#50) t=0.08  
 2. PULL-TAPE CAN BE PUT WITHIN THE RANGE OF "G" STRIAIGHT AREA.

No.	DISCRIPTION	MATERIAL	FINISH . REMARKS
5	PULL TAPE HOLDER	PHOSPHOR BRONZE	PARTIAL Au 0.003 μ m MIN. OVER Ni 1.0 μ m MIN.
4	SHELL B	PHOSPHOR BRONZE	ALL Au 0.01 μ m MIN. OVER Ni 1.00 μ m MIN.
3	SHELL A	PHOSPHOR BRONZE	PARTIAL Au 0.003 μ m MIN. OVER Ni 1.0 μ m MIN.
2	CONTACT	CORSON ALLOY	ALL OVER Ni 1.00 μ m MIN. CONTACT & SOLDERING AREA : Au 0.03 μ m MIN.
1	HOUSING	LCP	UL94V-0 ,BLACK

PART NO.	Pos.	H	J	K
21103-040E-02	40	16.25	15.60	10.80
21103-070E-02	70	28.25	27.60	25.20

## RECOMMENDED FPC FOOT PATTERN

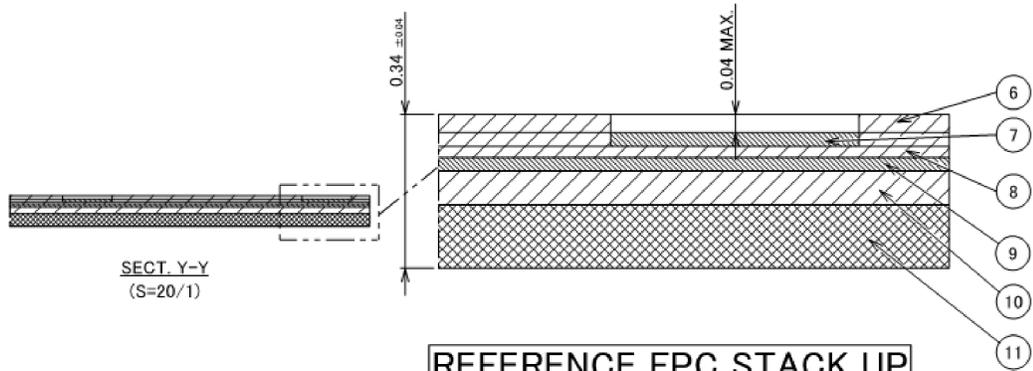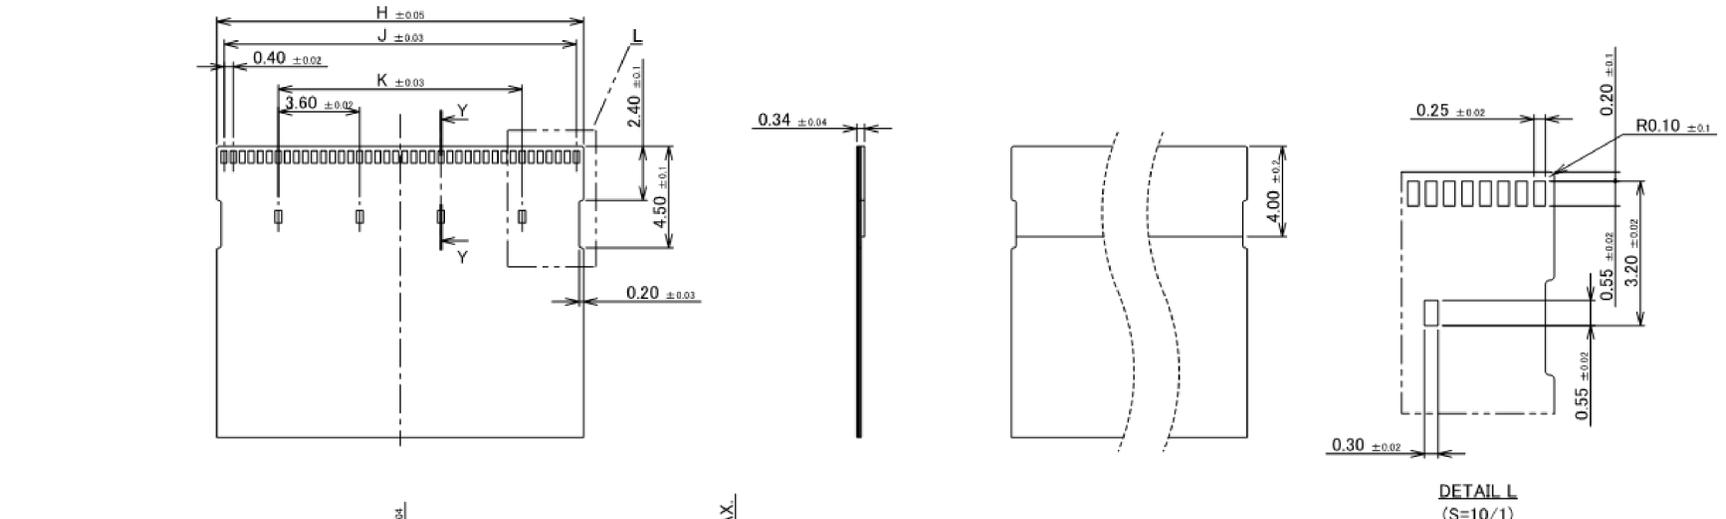

No.	DESCRIPTION	MATERIAL	PLATING
11	STIFFENER	SUS	Ni, Au
10	INSULATOR	-	-
9	CONDUCTOR (GROUND)	Cu	Ni, Au
8	INSULATOR	-	-
7	CONDUCTOR (SIGNAL,GROUND)	Cu	Ni, Au
6	INSULATOR	-	-

## REFERENCE FPC STACK UP


NOTE.  
 1. NO.7 CONDUCTOR(GROUND) AND NO.9 CONDUCTOR (GROUND) ARE CARRYING OUT THE ELECTRICAL CONNECTION.  
 2. IT IS RECOMMENDED TO ELECTRICALLY CONNECT NO.9 CONDUCTOR (GROUND) AND NO.11 STIFFENER.

Rev.0


Rev.0



# Plug for Cable Assembly

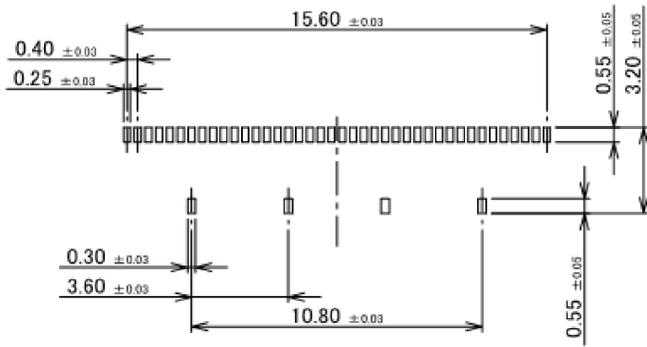


40P RECOMMENDED METAL MASK LAYOUT (S=5/1)  
 ※ METAL MASK THICKNESS : t = 0.12

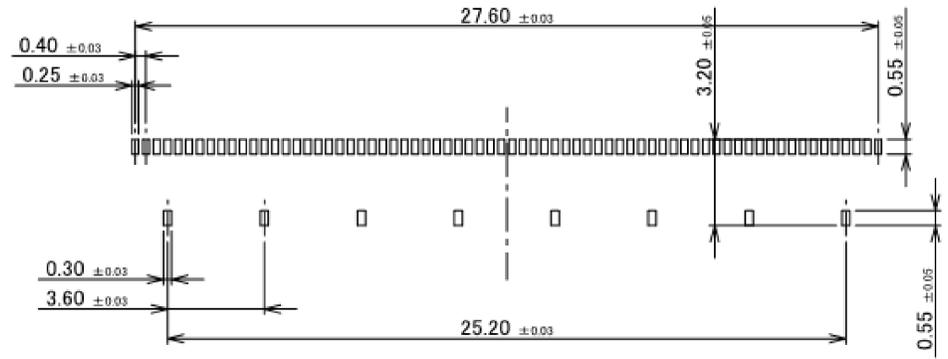


70P RECOMMENDED METAL MASK LAYOUT (S=5/1)  
 ※ METAL MASK THICKNESS : t = 0.12

Rev.0

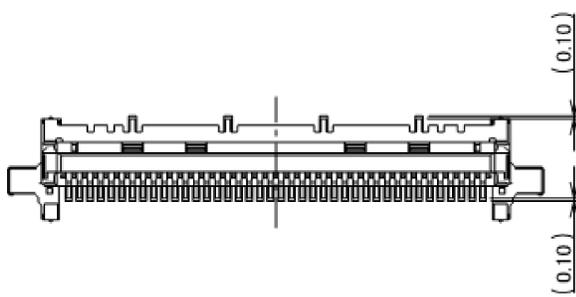

CONNECTOR ON RECOMMENDED FOOTPRINT PATTERN

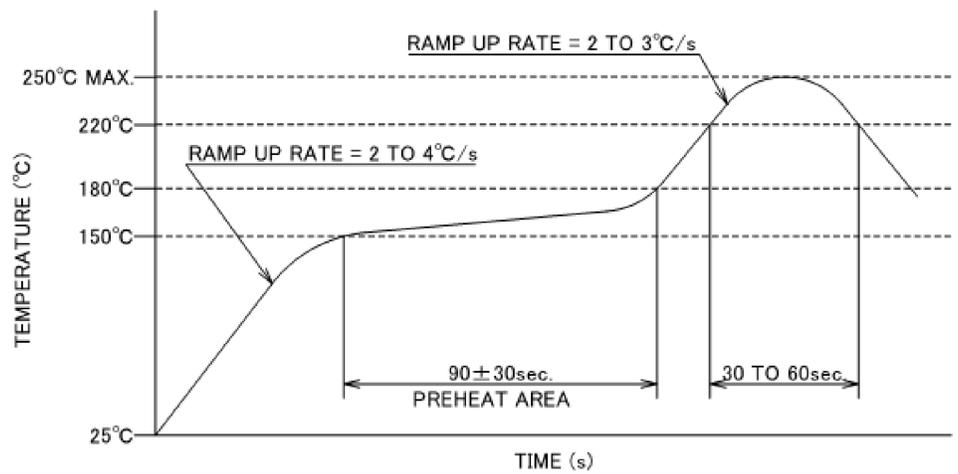

REFLOW TEMPERATURE PROFILE  
 SENJU METAL INDUSTRY CO., LTD. : M705-SHF(Sn96.5 Ag3.0 Cu0.5)

Rev.0

# Plug for Cable Assembly






ITEMS	SPECIFICATION
RATING VOLTAGE	100V AC (PER CONTACT PIN) ※THIS IS THE RATED VOLTAGE OF THE CONNECTOR.
RATING AMPERAGE (FOR SIGNAL CONTACT)	0.5A AC/DC (PER CONTACT PIN) ※AVAILABLE UP TO 31PIN 0.3A AC/DC (PER CONTACT PIN) ※AVAILABLE UP TO ALL PIN ※TO BE DETERMINED BY PROTOTYPE EVALUATION ※TESTING BY A REAL MACHINE IS RECOMMENDED BECAUSE TEMPERATURE RISE MAY AFFECTED BY ACTUAL SITUATION
OPERATING TEMPERATURE	233 TO 378K (-40°C TO +105°C)
OPERATING HUMIDITY	85% MAX.
CONTACT RESISTANCE (FOR SIGNAL CONTACT)	INITIAL : 60mohm MAX. / AFTER TEST : <math>\triangleleft 140\text{mohm}</math> MAX.
GROUND SHELL RESISTANCE	INITIAL : 50mohm MAX. / AFTER TEST : <math>\triangleleft 140\text{mohm}</math> MAX.
INSULATION RESISTANCE	INITIAL : 1000Mohm MIN. / AFTER TEST : 500Mohm MIN.
DIELECTRIC WITHSTANDING VOLTAGE	AC250V 1min
DURABILITY	30 CYCLES
MATING FORCE (INITIAL / AFTER TEST)	40P : 40.0N MAX. / 70P : 58.0N MAX.
UNMATING FORCE (INITIAL / AFTER TEST)	40P : 4.0N MIN. / 70P : 7.0N MIN.
COPLANARITY	0.10 MAX.
PRODUCT SPECIFICATION	PRS-2997
TEST REPORT	TR-26009
INSTRUCTION MANUAL	HIM-25007
ASSEMBLY MANUAL	ASM-26001
APPEARANCE CRITERIA No.	QLS-A***

※Only the single-hook pull jig is permitted  
The dual-hook pull jig is not allowed


Rev.0

# Lock Cover

Recommended P/N		3914-0**1				
PART NO.	Pos.	A	B	C	D	E
3914-0401	40	21.00	18.05	16.70	16.40	19.30
3914-0701	70	33.00	30.05	28.70	28.40	31.30

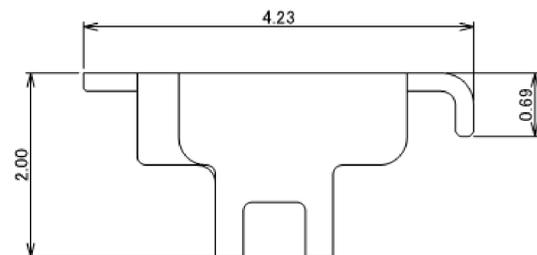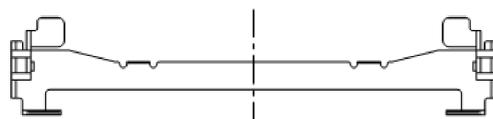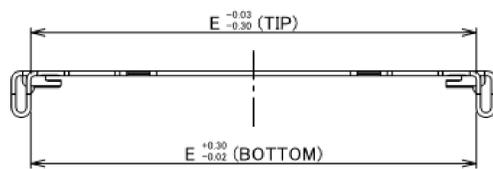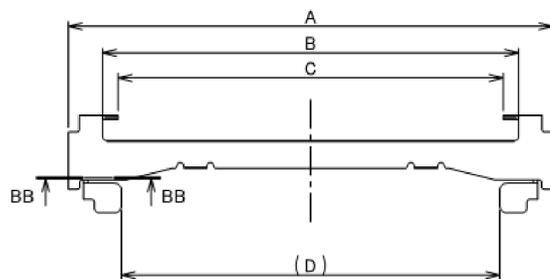

DETAIL AA  
(S=20/1)

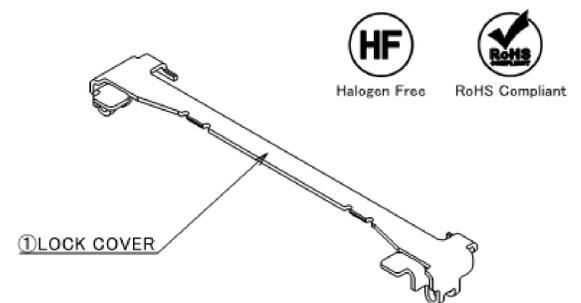

NO.	DESCRIPTION	MATERIAL	FINISH , REMARKS
1	LOCK COVER	PHOSPHOR BRONZE	ALL OVER Ni 1.00 μm MIN

Rev.0




# Receptacle Assembly

Recommended P/N		20879-0**E-01							
PART NO.	Pos.	A	B	C	D	E	F	G	H
20879-030E-#1	30	15.27	13.01	11.60	9.60	12.07	12.88	15.27	13.65
20879-040E-#1	40	19.27	17.01	15.60	14.40	16.07	16.88	19.27	17.65
20879-050E-#1	50	23.27	21.01	19.60	17.60	20.07	20.88	23.27	21.65
20879-060E-#1	60	27.27	25.01	23.60	21.60	24.07	24.88	27.27	25.65

P/N : 20879-0\*\*E-##  
Pos.

- 1 : NARROW GROUND PIN TYPE
  - 2 : WIDER GROUND PIN TYPE
- SEE TABLE.1

**#1 TYPE**

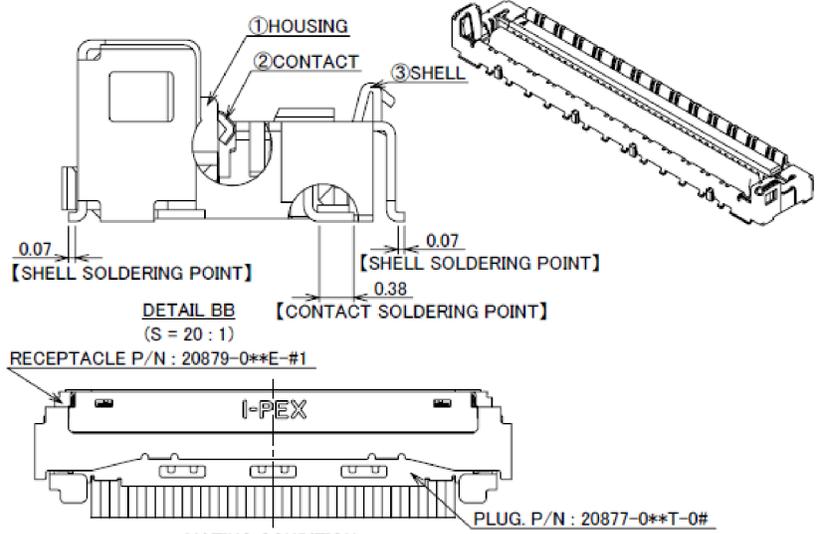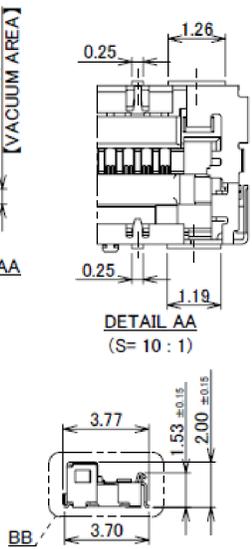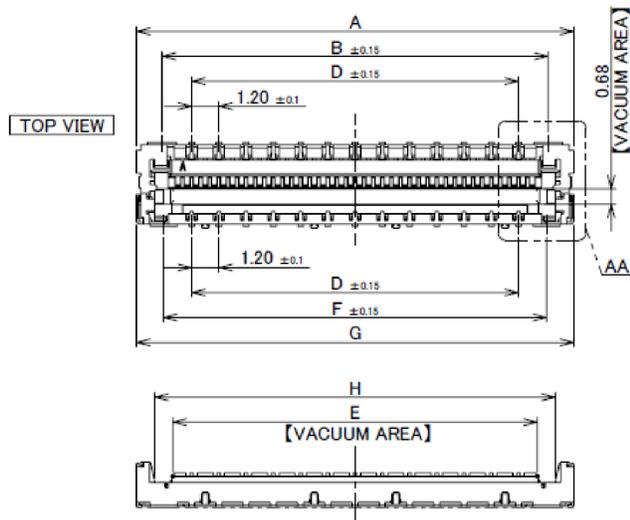

MATING CONDITION


TABLE.1

PART NO.	CONTACT FINISH
20879-0**E-01	ALL OVER Ni 1.00 μm MIN. CONTACT & SOLDERING AREA : Au 0.03 μm MIN.
20879-0**E-11	ALL OVER Ni 1.27 μm MIN. CONTACT AREA : Au 0.254 μm MIN. SOLDERING AREA : Au 0.03 μm MIN.


NO.	DISCRIPTION	MATERIAL	FINISH , REMARKS
3	SHELL	PHOSPHOR BRONZE	ALL OVER : Ni 1.00 μm MIN. SOLDERING AREA : Au 0.02 μm MIN.
2	CONTACT	CORSON ALLOY	SEE TABLE.1
1	HOUSING	LCP	UL94V-0, BLACK

Rev.18

Recommended P/N		20879-0**E-01		
PART NO.	Pos.	A	D	G
20879-030E-#1	30	15.27	9.60	15.27
20879-040E-#1	40	19.27	14.40	19.27
20879-050E-#1	50	23.27	17.60	23.27
20879-060E-#1	60	27.27	21.60	27.27

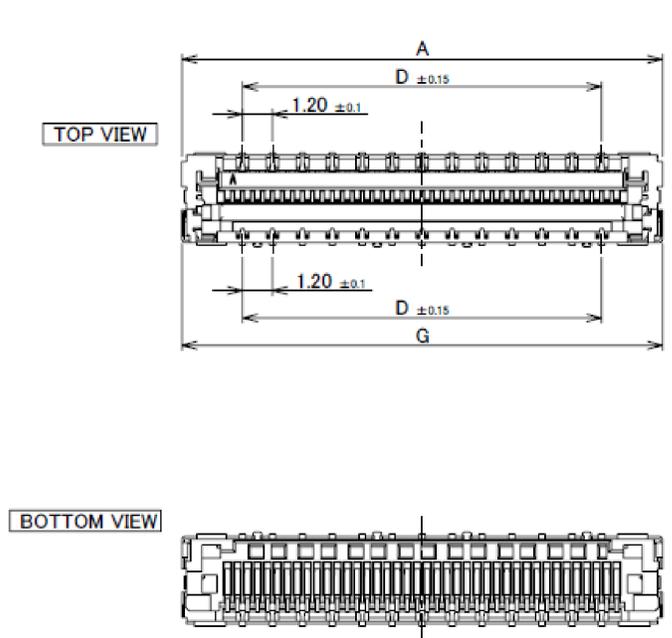

30P, 40P, 60P

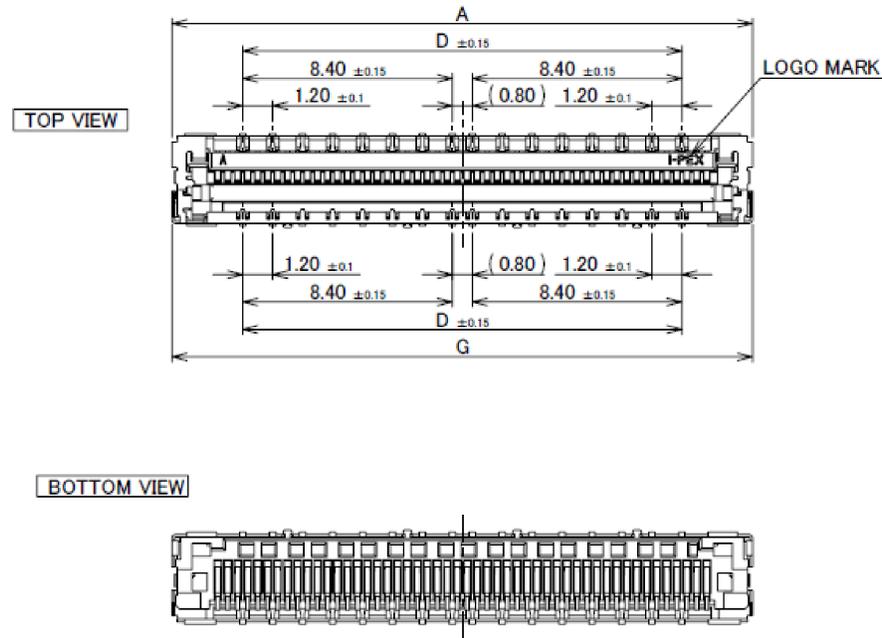

50P

Rev.18



# Receptacle Assembly


Recommended P/N		20879-0**E-01									
PART NO.	Pos.	A	C	E	G	H	J	K	L	M	N
20879-030E-02	30	15.27	11.60	12.07	15.27	13.65	14.87	4.00	-	7.09	14.69
20879-040E-02	40	19.27	15.60	16.07	19.27	17.65	18.87	8.00	4.00	6.70	18.69
20879-050E-02	50	23.27	19.60	20.07	23.27	21.65	22.87	14.40	3.60	8.70	22.69
20879-060E-02	60	27.27	23.60	24.07	27.27	25.65	26.87	17.60	-	10.70	26.69
20879-070E-02	70	31.27	27.60	28.07	31.27	29.65	30.87	20.00	-	11.50	30.69

02 TYPE



Halogen Free

RoHS Compliant

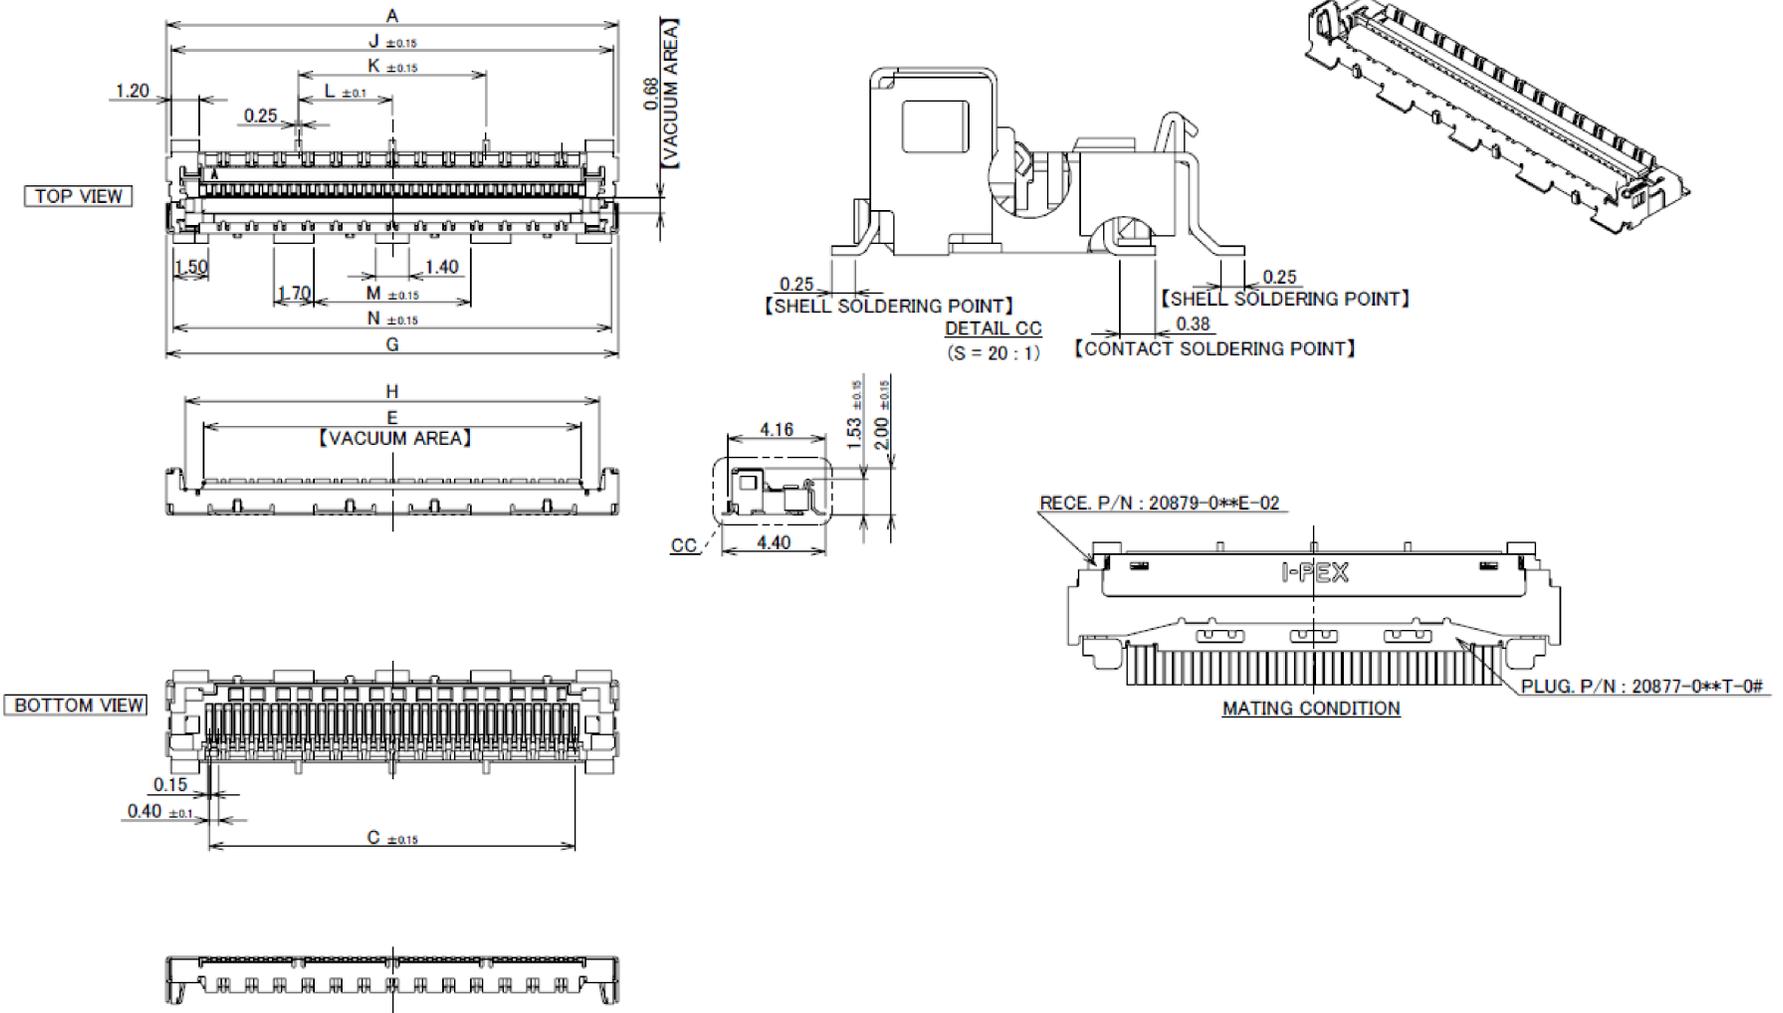

Rev.18


Recommended P/N		20879-0**E-01											
PART NO.	Pos.	A	C	E	G	H	J	K	L	M	N	P	AD
20879-030E-02	30	15.27	11.60	12.07	15.27	13.65	14.87	4.00	-	7.09	14.69	-	-
20879-040E-02	40	19.27	15.60	16.07	19.27	17.65	18.87	8.00	4.00	6.70	18.69	-	-
20879-050E-02	50	23.27	19.60	20.07	23.27	21.65	22.87	14.40	3.60	8.70	22.69	7.20	-
20879-060E-02	60	27.27	23.60	24.07	27.27	25.65	26.87	17.60	-	10.70	26.69	11.20	3.20
20879-070E-02	70	31.27	27.60	28.07	31.27	29.65	30.87	20.00	-	11.50	30.69	12.00	4.00

02 TYPE



Halogen Free

RoHS Compliant


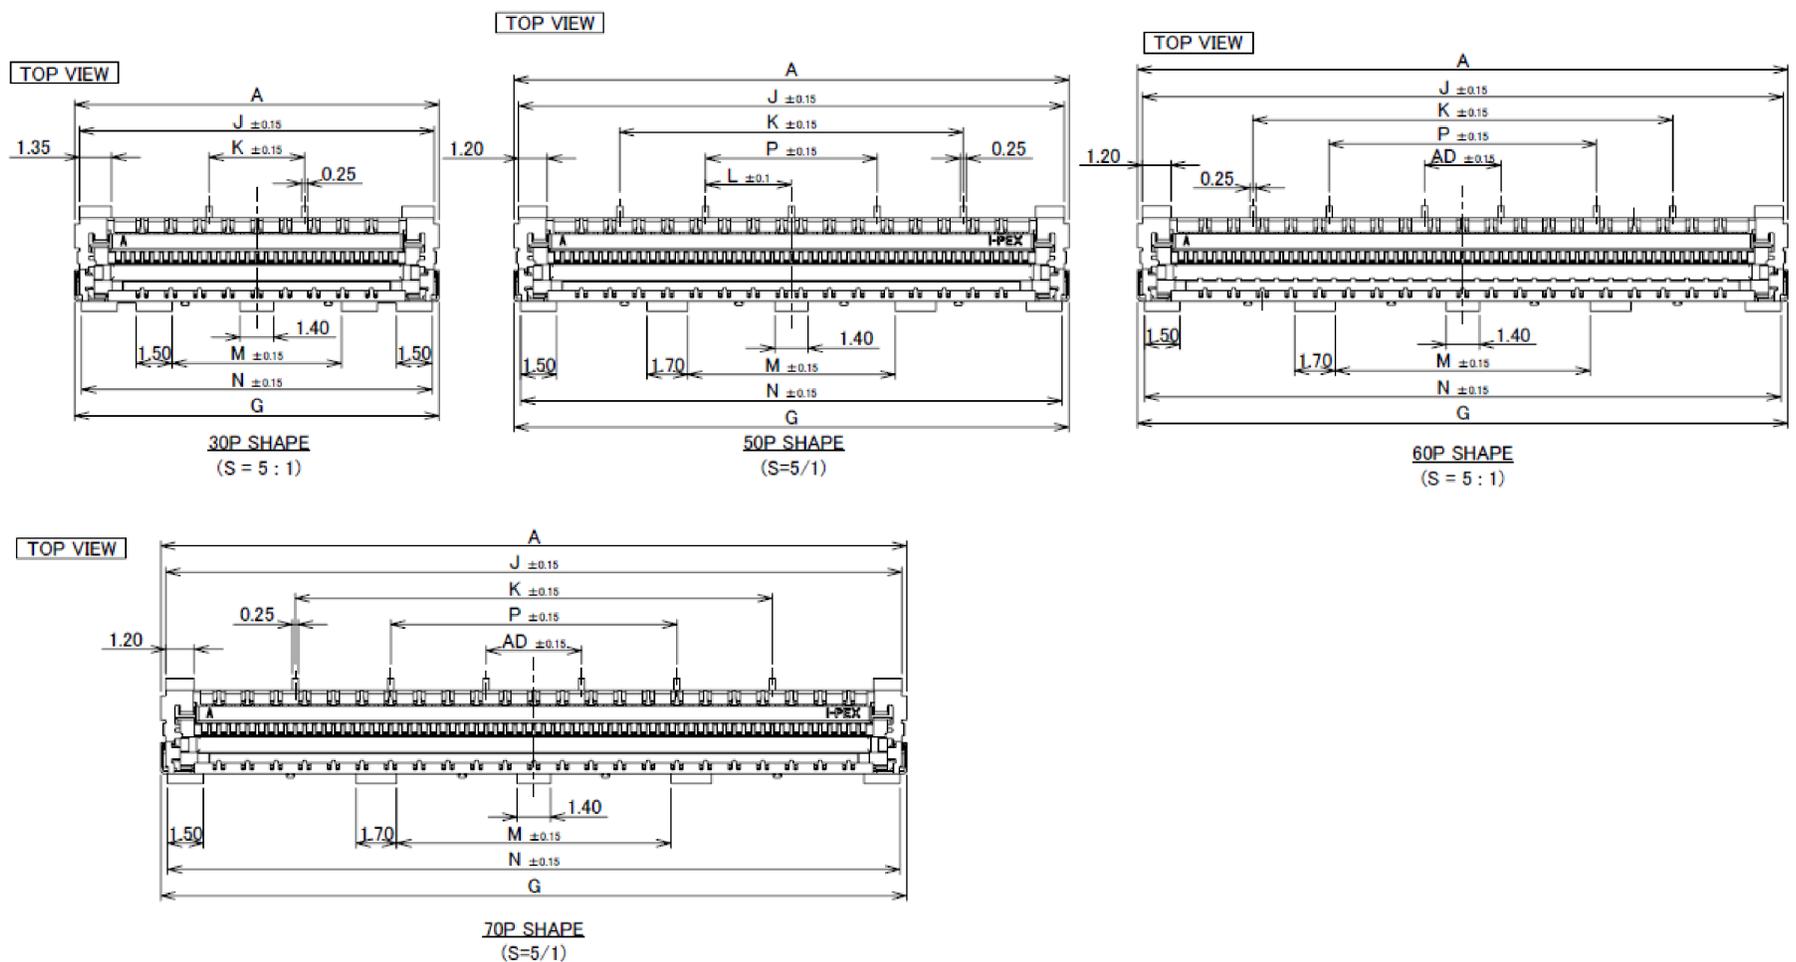


Rev.18

# Receptacle Assembly

PART No.	Pos.	B	C	D	F	P	Q	R	S	T	AE	AF
20879-030E-#1	30	13.01	11.60	9.60	12.88	15.17	12.00	15.07	19.00	12.50	18.00	17.00
20879-040E-#1	40	17.01	15.60	14.40	16.88	19.17	16.00	19.07	23.00	16.50	22.00	21.00
20879-060E-#1	60	25.01	23.60	21.60	24.88	27.17	24.00	27.07	31.00	24.50	30.00	29.00

PLUG PART No.	DUAL-HOOK PULL JIG	PCB LAYOUT
20877-0##T-01	USE	TYPE A
	UNUSED	TYPE B
20877-0##T-02	USE	TYPE A
	UNUSED	TYPE C
20877-0##T-03	-	TYPE C
	-	

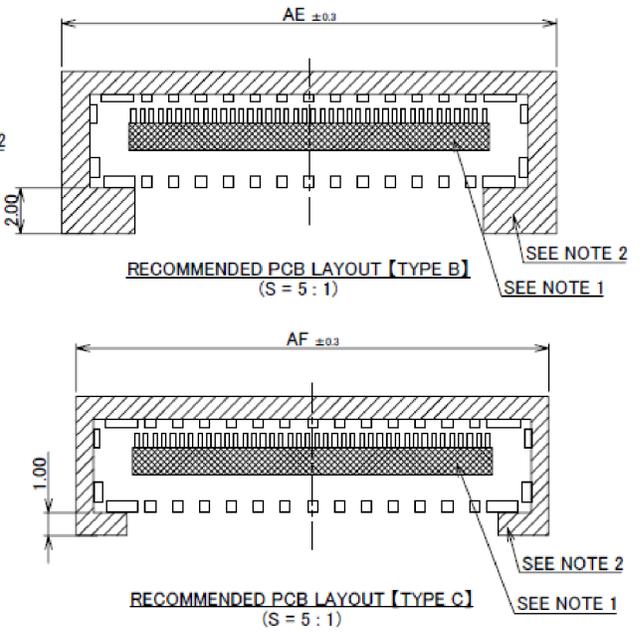
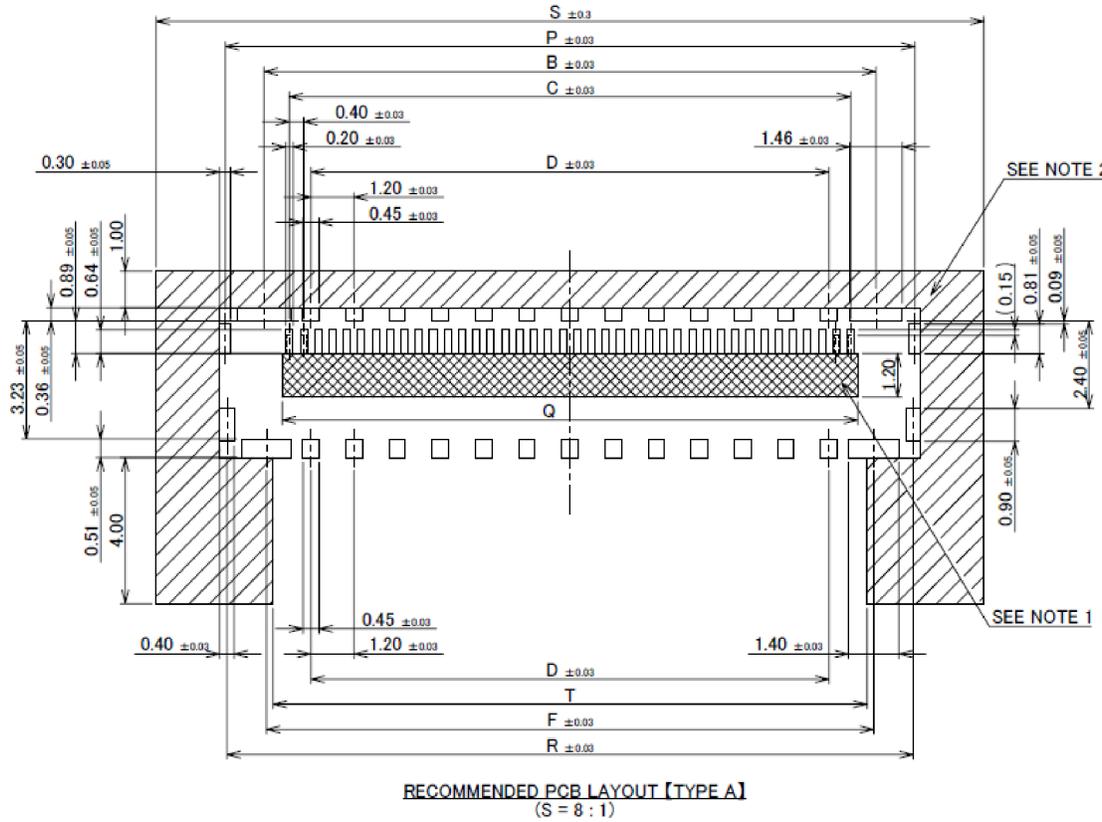


- NOTES.  
 1. SOLDER RESIST MUST BE APPLIED TO THIS AREA.  
 2. DO NOT MOUNT ANOTHER COMPONENT IN THIS AREA.  
 THIS AREA VARIES DEPENDING ON WHETHER THE PULL JIG IS USED,  
 AND THE PART NUMBER OF THE PLUG CABLE ASSEMBLY BEING USED.  
 FOR DETAILS ON THE PULL JIG, PLEASE REFER TO HIM-18033.

Rev.18

PART No.	Pos.	B	C	D	F	P	Q	R	S	T	AE	AF
20879-050E-#1	50	21.01	19.60	17.60	20.88	23.17	20.00	23.07	27.00	20.50	26.00	25.00

PLUG PART No.	DUAL-HOOK PULL JIG	PCB LAYOUT
20877-0##T-01	USE	TYPE A
	UNUSED	TYPE B
20877-0##T-02	USE	TYPE A
	UNUSED	TYPE C
20877-0##T-03	-	TYPE C
	-	

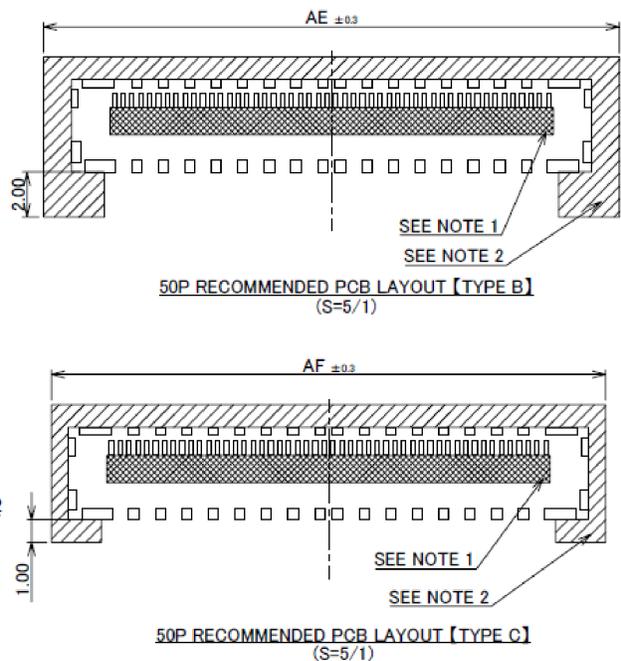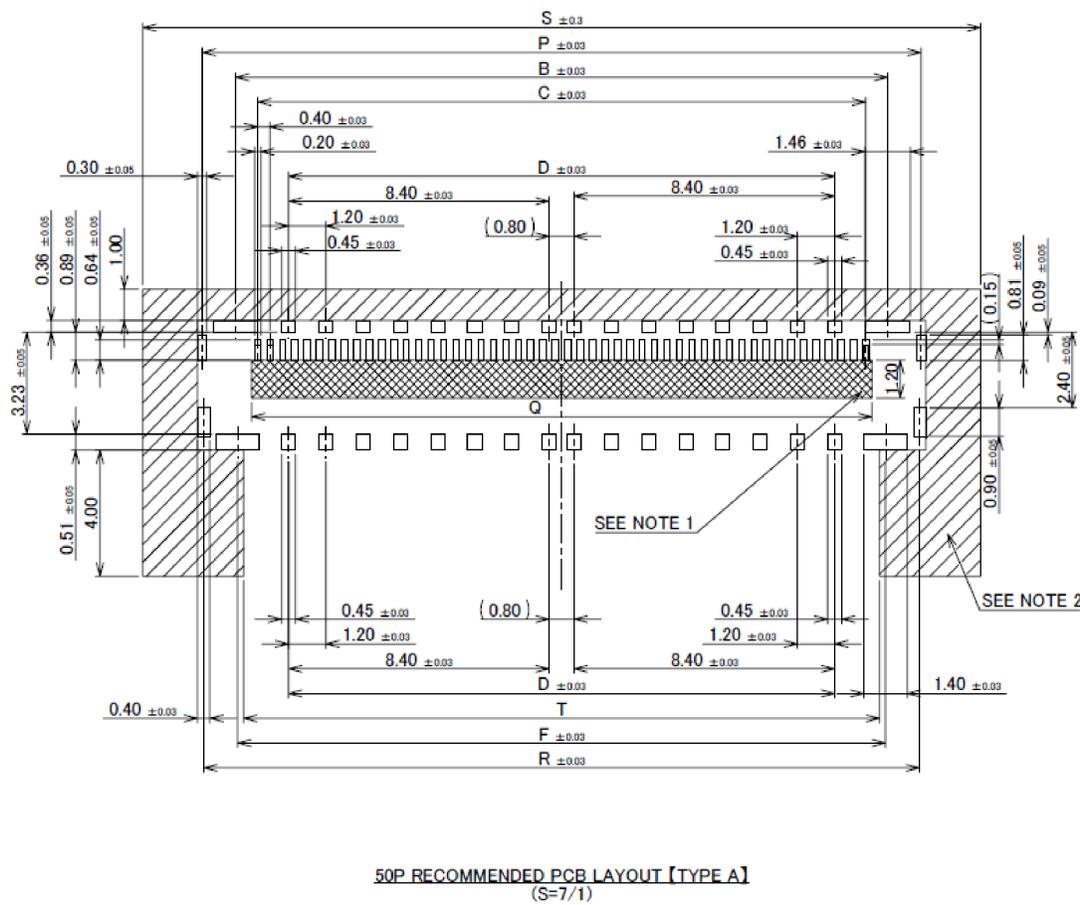

- NOTES.  
 1. SOLDER RESIST MUST BE APPLIED TO THIS AREA.  
 2. DO NOT MOUNT ANOTHER COMPONENT IN THIS AREA.  
 THIS AREA VARIES DEPENDING ON WHETHER THE PULL JIG IS USED,  
 AND THE PART NUMBER OF THE PLUG CABLE ASSEMBLY BEING USED.  
 FOR DETAILS ON THE PULL JIG, PLEASE REFER TO HIM-18033.


Rev.18

# Receptacle Assembly


PART No.	Pos.
20879-030E-#1	30
20879-040E-#1	40
20879-050E-#1	50
20879-060E-#1	60

#1 TYPE


With LOCK COVER

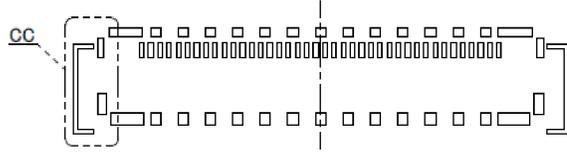


RECOMMENDED SILK PRINT For With LOCK COVER  
(S = 5 : 1)

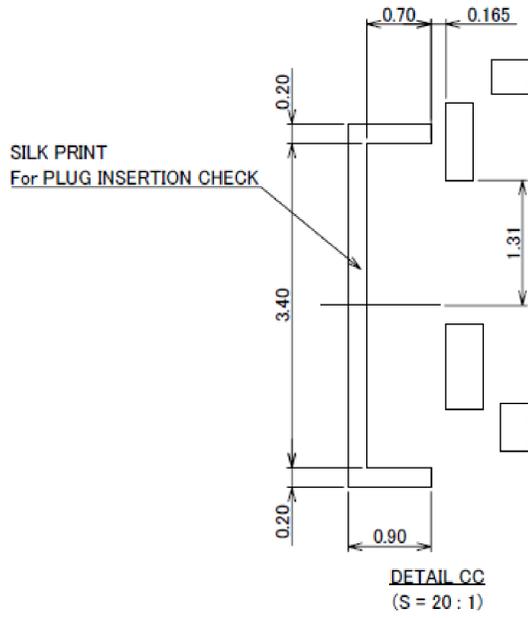

Without LOCK COVER & With PULL TAPE HOLDER

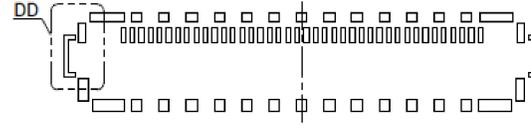

RECOMMENDED SILK PRINT For Without LOCK COVER  
(S = 5 : 1)



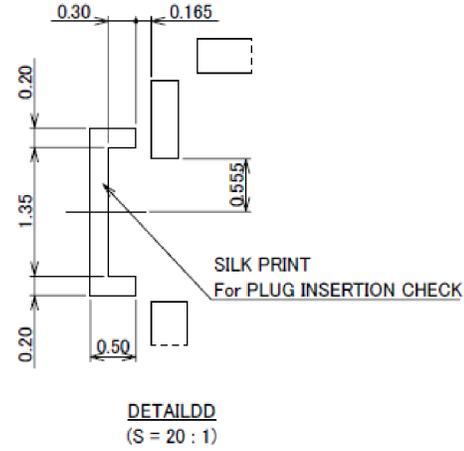


Rev.18

PART No.	Pos.	C	K	L	Q	S	T	U	V	W	X	AE	AF
20879-030E-02	30	11.60	4.00	-	12.00	19.00	12.50	6.89	15.07	14.89	15.47	18.00	17.00

PLUG PART No.	DUAL-HOOK PULL JIG	PCB LAYOUT
20877-0##T-01	USE	TYPE A
	UNUSED	TYPE B
20877-0##T-02	USE	TYPE A
	UNUSED	TYPE C
20877-0##T-03	-	TYPE C
	-	

02 TYPE

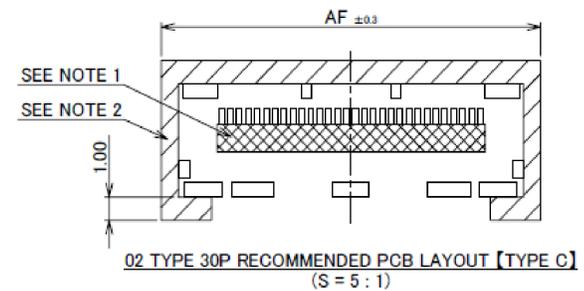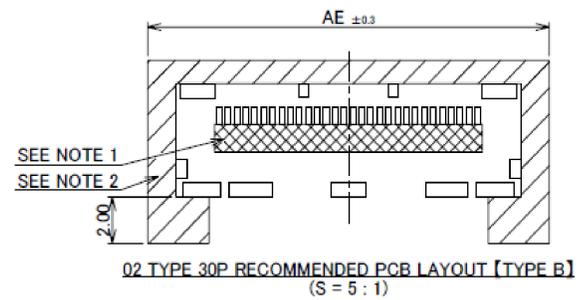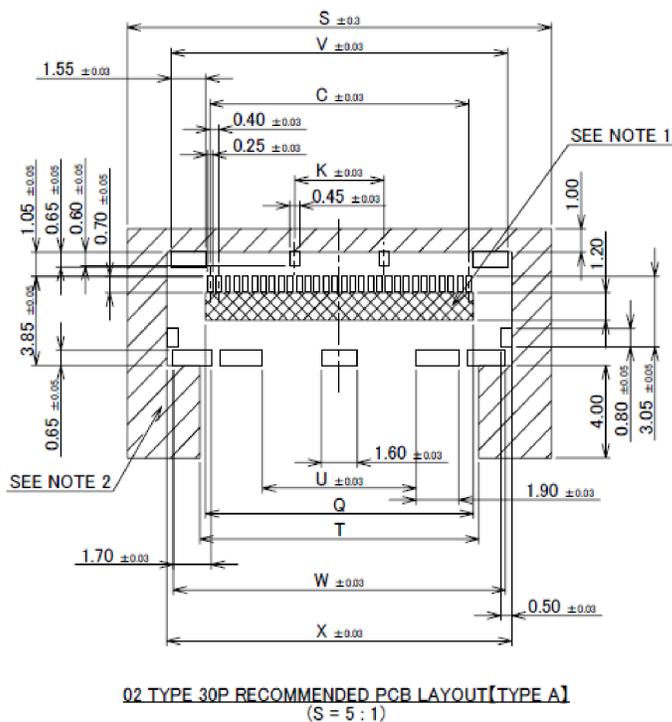

NOTES.




- SOLDER RESIST MUST BE APPLIED TO THIS AREA.
  - DO NOT MOUNT ANOTHER COMPONENT IN THIS AREA.
- THIS AREA VARIES DEPENDING ON WHETHER THE PULL JIG IS USED, AND THE PART NUMBER OF THE PLUG CABLE ASSEMBLY BEING USED. FOR DETAILS ON THE PULL JIG, PLEASE REFER TO HIM-18033.

Rev.18

# Receptacle Assembly

PART No.	Pos.	C	K	L	Q	S	T	U	V	W	X	AE	AF
20879-040E-02	40	15.60	8.00	4.00	16.00	23.00	16.50	6.50	19.07	18.89	19.47	22.00	21.00

## 02 TYPE

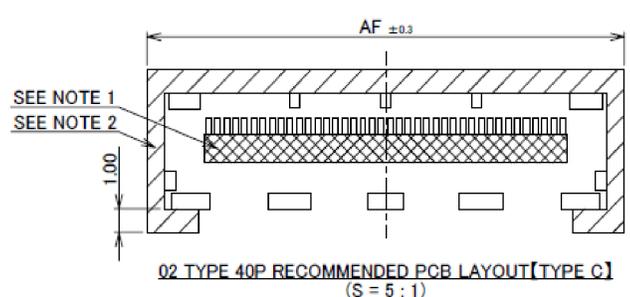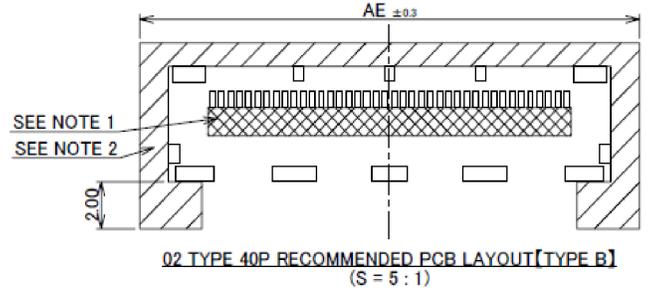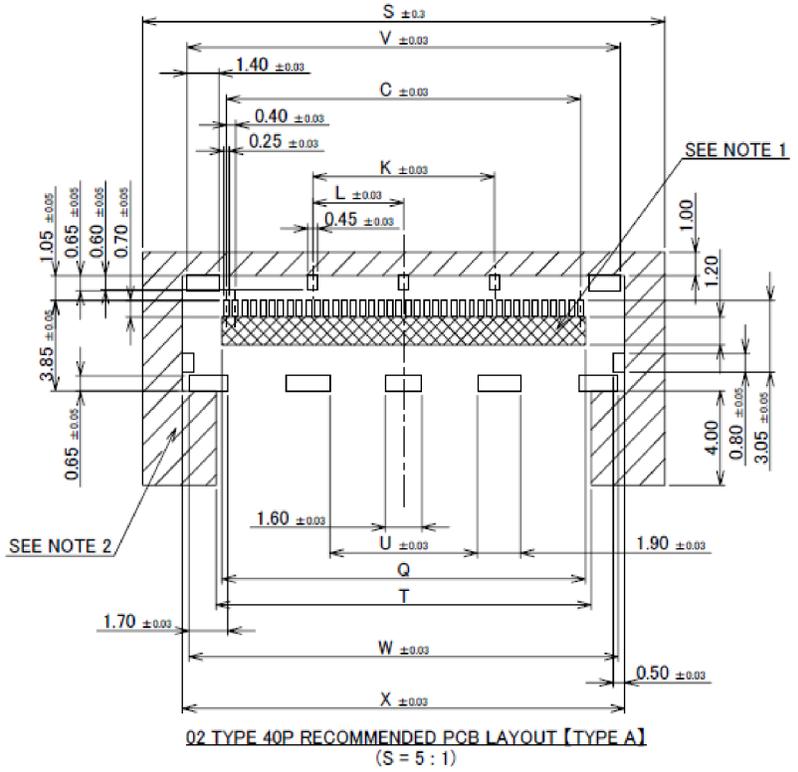




PLUG PART No.	DUAL-HOOK PULL JIG	PCB LAYOUT
20877-0##T-01	USE	TYPE A
	UNUSED	TYPE B
20877-0##T-02	USE	TYPE A
	UNUSED	TYPE C
20877-0##T-03	-	TYPE C
	-	

NOTES.  
 1. SOLDER RESIST MUST BE APPLIED TO THIS AREA.  
 2. DO NOT MOUNT ANOTHER COMPONENT IN THIS AREA.  
 THIS AREA VARIES DEPENDING ON WHETHER THE PULL JIG IS USED,  
 AND THE PART NUMBER OF THE PLUG CABLE ASSEMBLY BEING USED.  
 FOR DETAILS ON THE PULL JIG, PLEASE REFER TO HIM-18033.

Rev.18

PART No.	Pos.	C	K	L	P	Q	S	T	U	V	W	X	AE	AF
20879-050E-02	50	19.60	14.40	3.60	7.20	20.00	27.00	20.50	8.50	23.07	22.89	23.47	26.00	25.00

## 02 TYPE

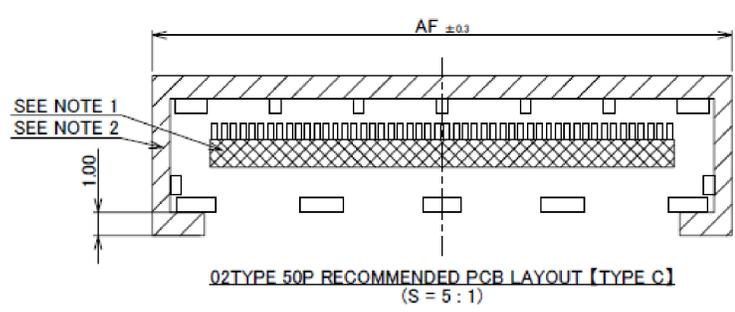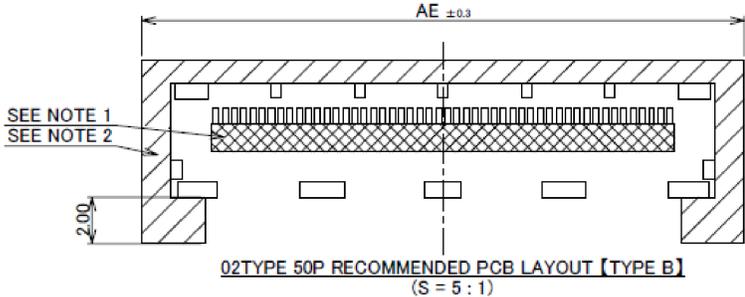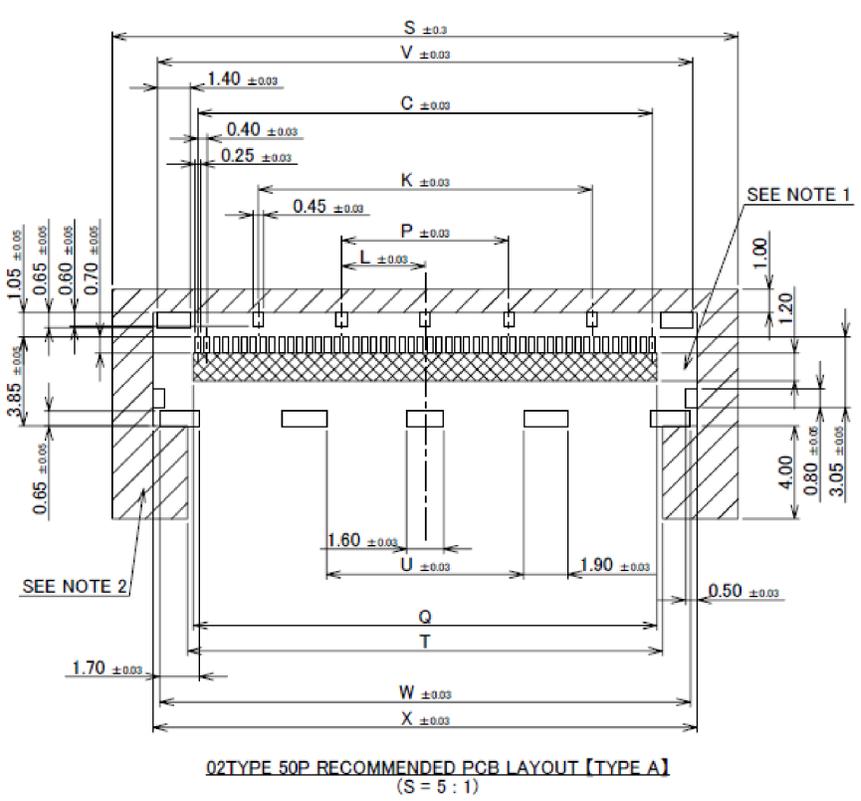

PLUG PART No.	DUAL-HOOK PULL JIG	PCB LAYOUT
20877-0##T-01	USE	TYPE A
	UNUSED	TYPE B
20877-0##T-02	USE	TYPE A
	UNUSED	TYPE C
20877-0##T-03	-	TYPE C
	-	

NOTES.  
 1. SOLDER RESIST MUST BE APPLIED TO THIS AREA.  
 2. DO NOT MOUNT ANOTHER COMPONENT IN THIS AREA.  
 THIS AREA VARIES DEPENDING ON WHETHER THE PULL JIG IS USED,  
 AND THE PART NUMBER OF THE PLUG CABLE ASSEMBLY BEING USED.  
 FOR DETAILS ON THE PULL JIG, PLEASE REFER TO HIM-18033.




Rev.18

# Receptacle Assembly

PART No.	Pos.	C	K	L	P	Q	S	T	U	V	W	X	AD	AE	AF
20879-060E-02	60	23.60	17.60	-	11.20	24.00	31.00	24.50	10.50	27.07	26.89	27.47	3.20	30.00	29.00

PLUG PART No.	DUAL-HOOK PULL JIG	PCB LAYOUT
20877-0#T-01	USE	TYPE A
	UNUSED	TYPE B
20877-0#T-02	USE	TYPE A
	UNUSED	TYPE C
20877-0#T-03	-	-
	-	TYPE C

## 02 TYPE

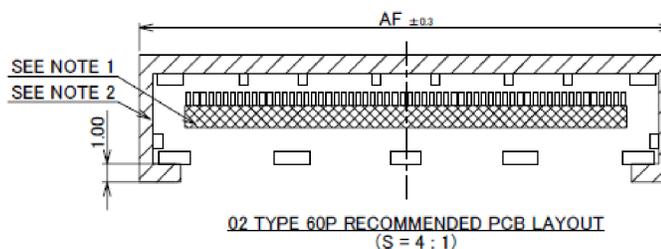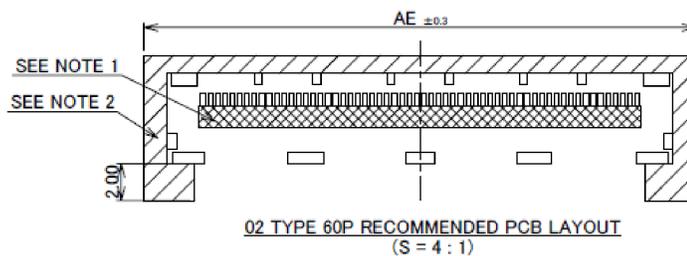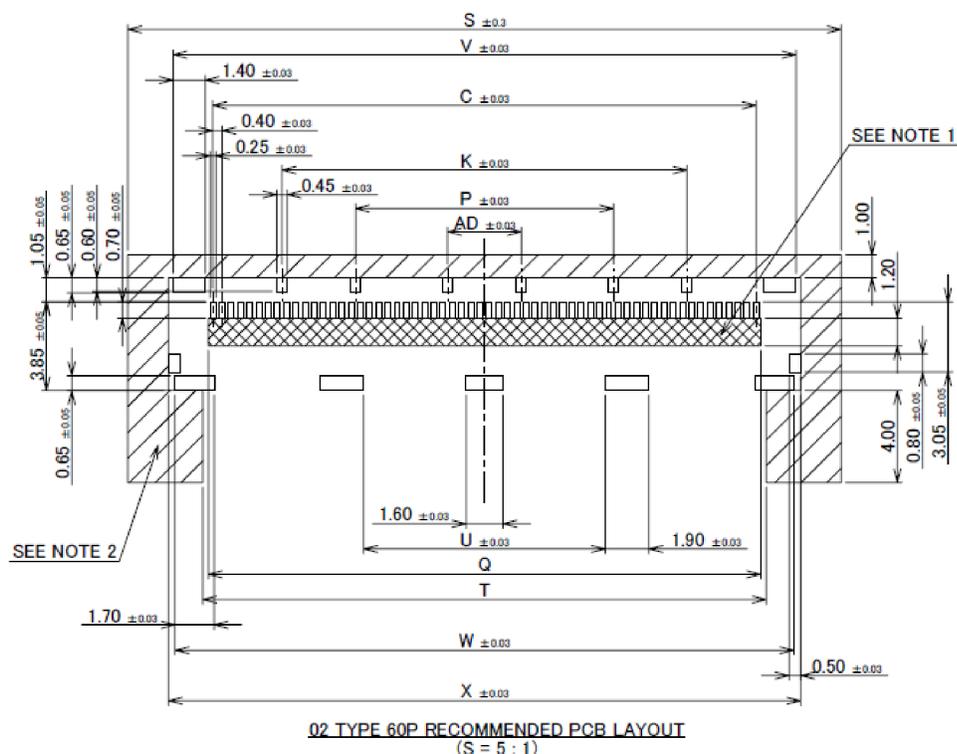

NOTES.


1. SOLDER RESIST MUST BE APPLIED TO THIS AREA.
  2. DO NOT MOUNT ANOTHER COMPONENT IN THIS AREA.
- THIS AREA VARIES DEPENDING ON WHETHER THE PULL JIG IS USED, AND THE PART NUMBER OF THE PLUG CABLE ASSEMBLY BEING USED. FOR DETAILS ON THE PULL JIG, PLEASE REFER TO HIM-18033.

Rev.18




PART No.	Pos.
20879-030E-02	30
20879-040E-02	40
20879-050E-02	50
20879-060E-02	60
20879-070E-02	70

## 02 TYPE

### With LOCK COVER

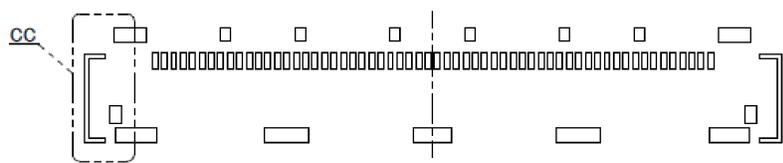

### Without LOCK COVER & With PULL TAPE HOLDER

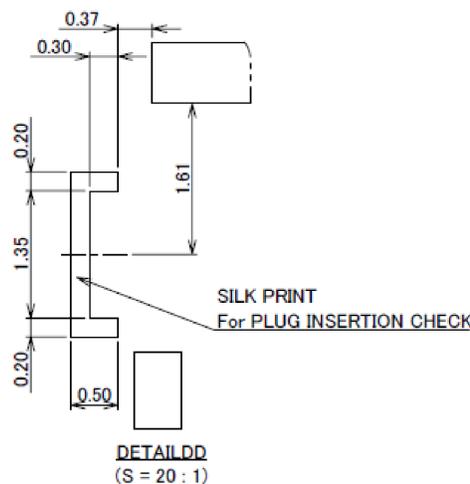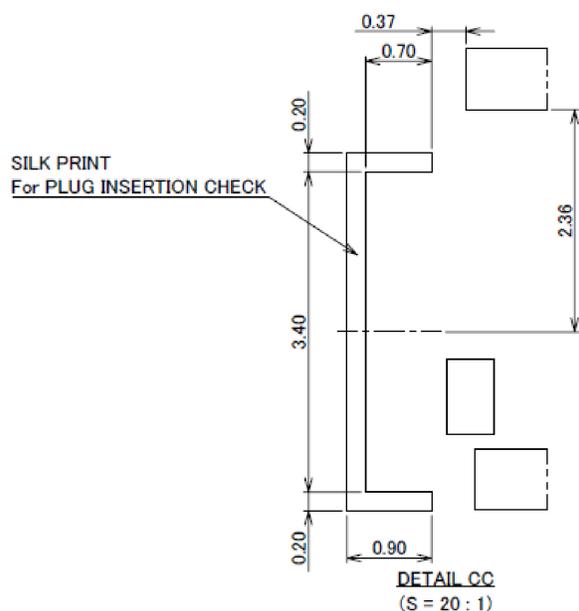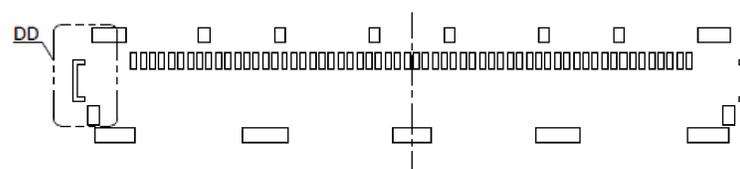


Rev.18

# Receptacle Assembly

PART No.	Pos.	B	C	D	F	P	R
20879-030E-#1	30	13.01	11.60	9.60	12.88	15.17	15.07
20879-040E-#1	40	17.01	15.60	14.40	16.88	19.17	19.07
20879-060E-#1	60	25.01	23.60	21.60	24.88	27.17	27.07

#1 TYPE

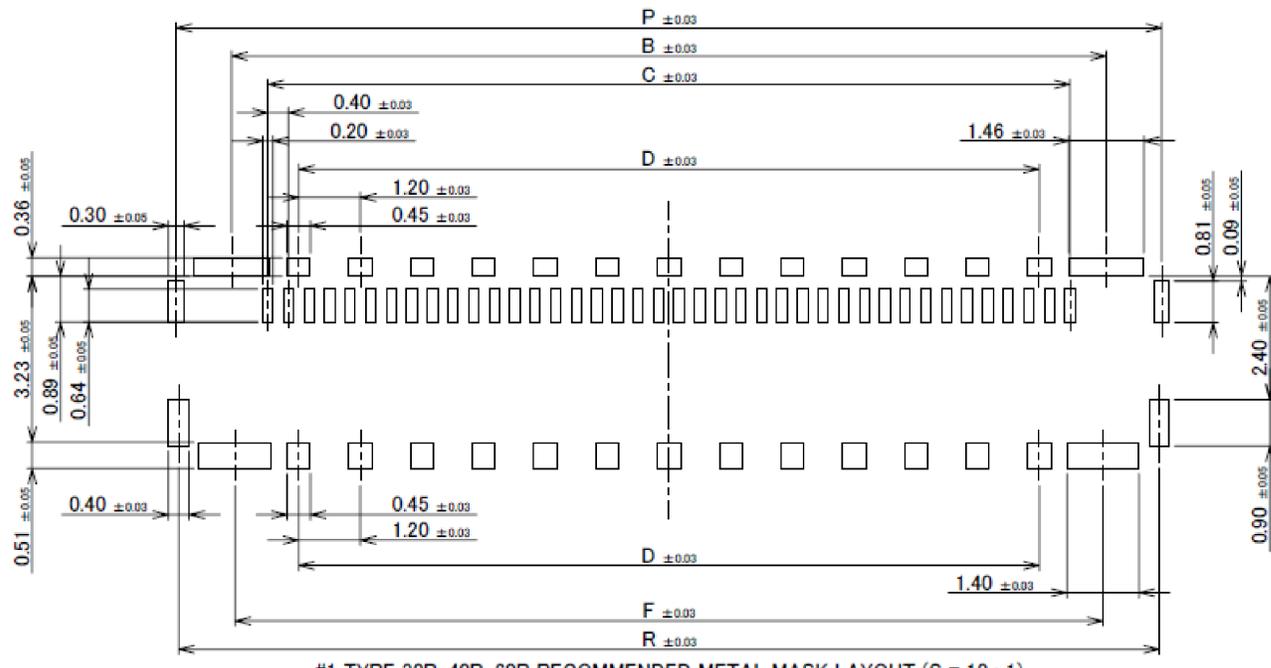


#1 TYPE 30P, 40P, 60P RECOMMENDED METAL MASK LAYOUT (S = 10 : 1)  
 ※ METAL MASK THICKNESS : t = 0.10

Rev.18

PART No.	Pos.	B	C	D	F	P	R
20879-050E-#1	50	21.01	19.60	17.60	20.88	23.17	23.07

#1 TYPE

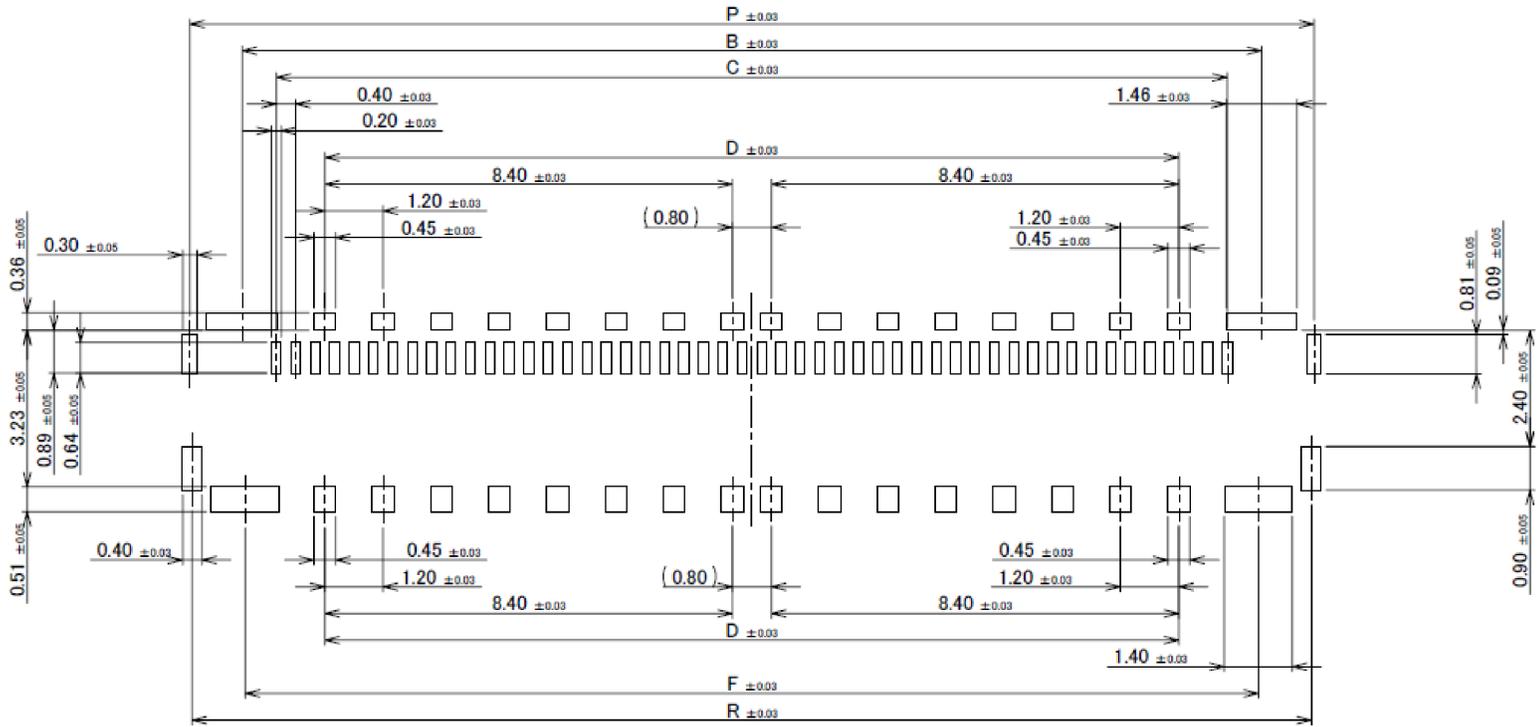


#1 TYPE 50P RECOMMENDED METAL MASK LAYOUT (S = 10 : 1)  
 ※ METAL MASK THICKNESS : t = 0.10

Rev.18


# Receptacle Assembly

PART No.	Pos.	C	K	L	U	V	W	X
20879-030E-02	30	11.60	4.00	-	6.89	15.07	14.89	15.47
20879-040E-02	40	15.60	8.00	4.00	6.50	19.07	18.89	19.47
20879-050E-02	50	19.60	14.40	3.60	8.50	23.07	22.89	23.47
20879-060E-02	60	23.60	17.60	-	10.50	27.07	26.89	27.47
20879-070E-02	70	27.60	20.00	-	11.30	31.07	30.89	31.47

02 TYPE

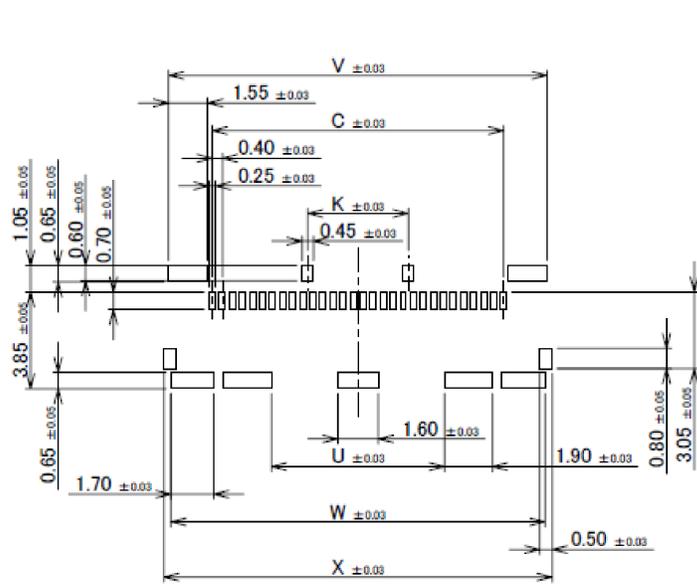

02 TYPE 30P RECOMMENDED METAL MASK LAYOUT (S = 5 : 1)  
※ METAL MASK THICKNESS : t = 0.12

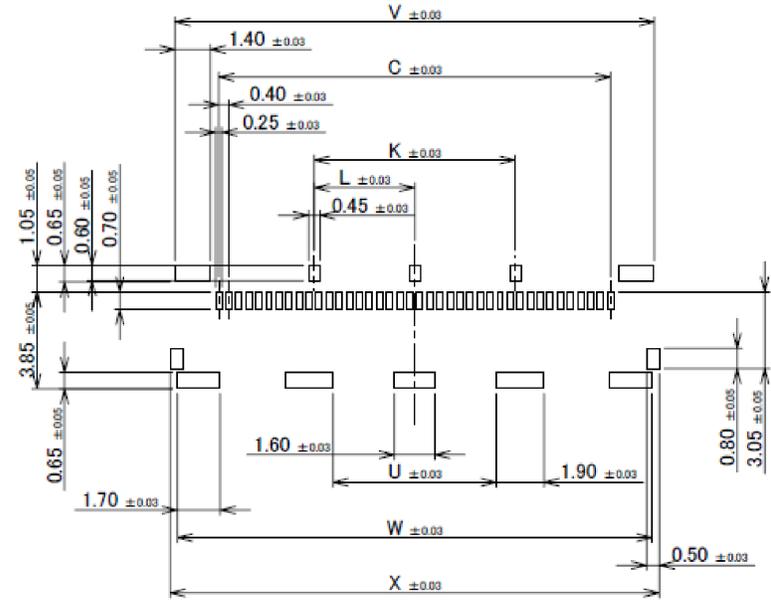


02 TYPE 40P RECOMMENDED METAL MASK LAYOUT (S = 5 : 1)  
※ METAL MASK THICKNESS : t = 0.12


Rev.18

PART No.	Pos.	C	K	L	P	U	V	W	X	AD
20879-030E-02	30	11.60	4.00	-	-	6.89	15.07	14.89	15.47	-
20879-040E-02	40	15.60	8.00	4.00	-	6.50	19.07	18.89	19.47	-
20879-050E-02	50	19.60	14.40	3.60	7.20	8.50	23.07	22.89	23.47	-
20879-060E-02	60	23.60	17.60	-	11.20	10.50	27.07	26.89	27.47	3.20
20879-070E-02	70	27.60	20.00	-	12.00	11.30	31.07	30.89	31.47	4.00

02 TYPE

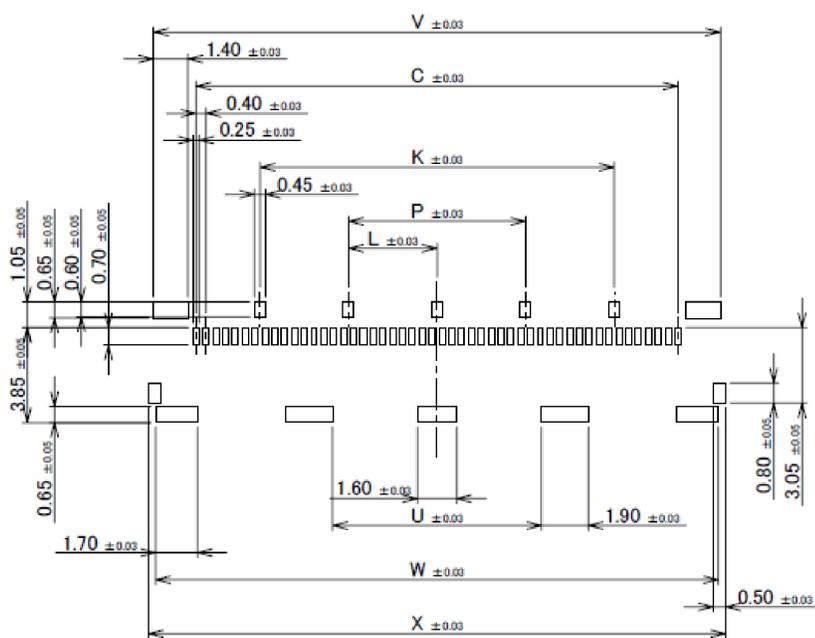

02 TYPE 50P RECOMMENDED METAL MASK LAYOUT (S = 5 : 1)  
※ METAL MASK THICKNESS : t = 0.12

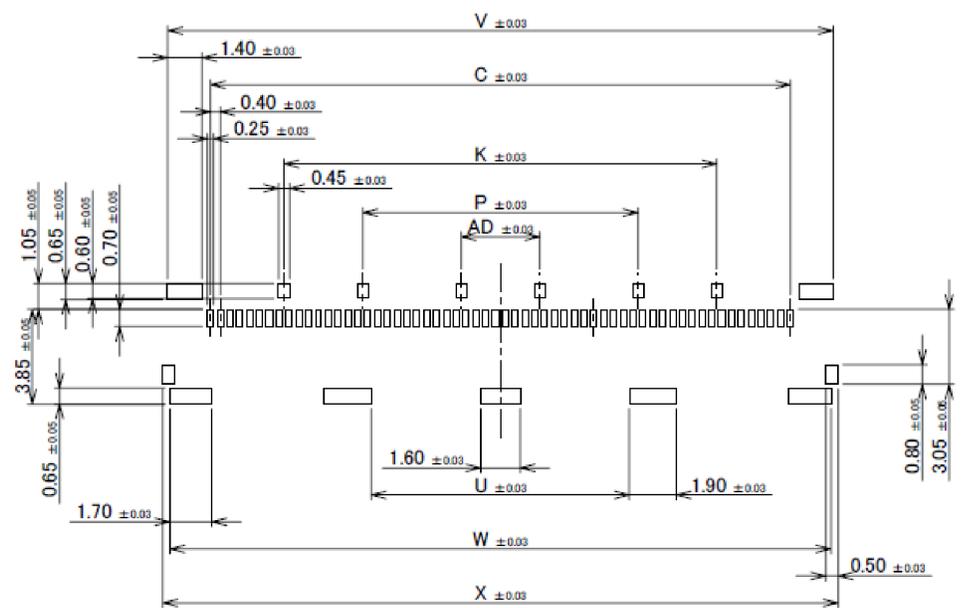


02 TYPE 60P RECOMMENDED METAL MASK LAYOUT (S = 5 : 1)  
※ METAL MASK THICKNESS : t = 0.12

Rev.18

# Receptacle Assembly


PART No.	Pos.	C	K	L	P	U	V	W	X	AD
20879-030E-02	30	11.60	4.00	-	-	6.89	15.07	14.89	15.47	-
20879-040E-02	40	15.60	8.00	4.00	-	6.50	19.07	18.89	19.47	-
20879-050E-02	50	19.60	14.40	3.60	7.20	8.50	23.07	22.89	23.47	-
20879-060E-02	60	23.60	17.60	-	11.20	10.50	27.07	26.89	27.47	3.20
20879-070E-02	70	27.60	20.00	-	12.00	11.30	31.07	30.89	31.47	4.00

02 TYPE

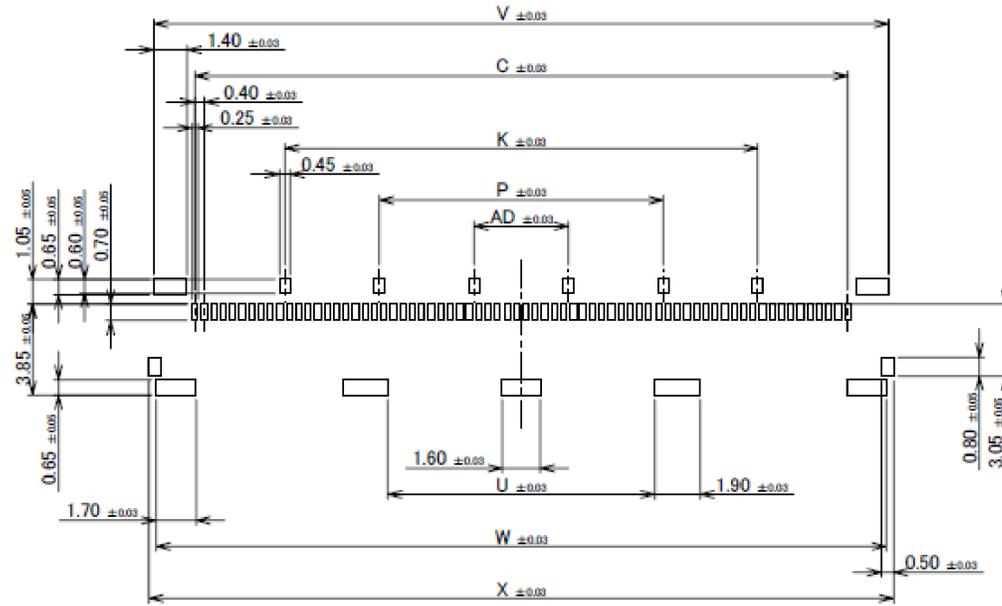


02 TYPE 70P RECOMMENDED METAL MASK LAYOUT (S = 5 : 1)  
※ METAL MASK THICKNESS : t = 0.12


Rev.18

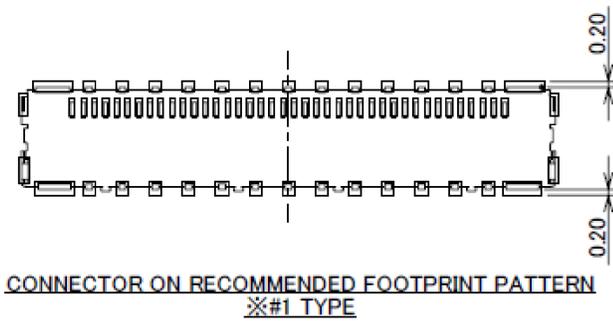

CONNECTOR ON RECOMMENDED FOOTPRINT PATTERN  
※#1 TYPE

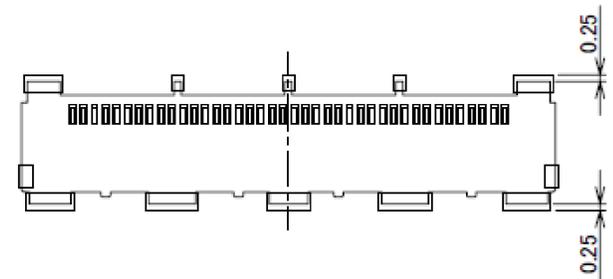

CONNECTOR ON RECOMMENDED FOOTPRINT PATTERN  
※02 TYPE

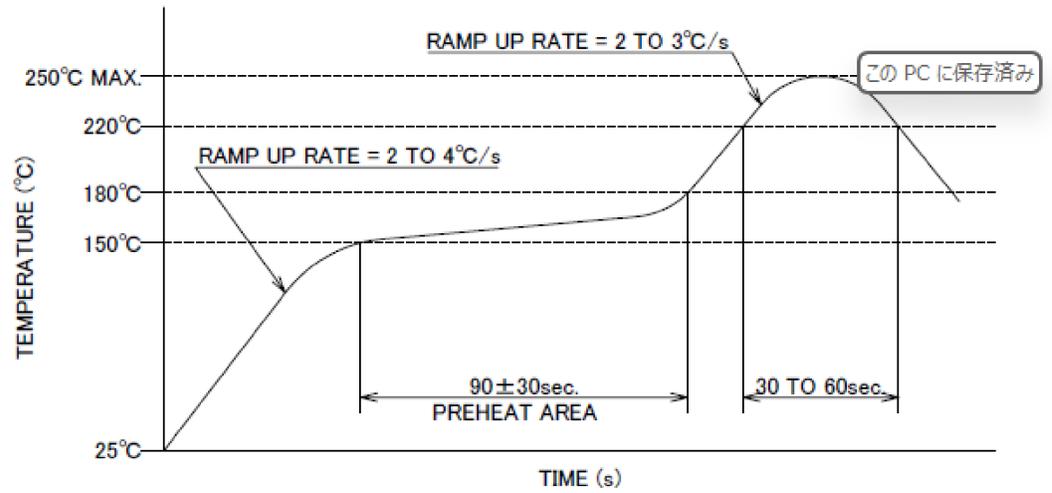


REFLOW TEMPERATURE PROFILE  
SENJU METAL INDUSTRY CO., LTD.: M705-SHF(Sn96.5 Ag3.0 Cu0.5)

Rev.18

# Custom Connectors Available

## RF Connectors

MHF® series

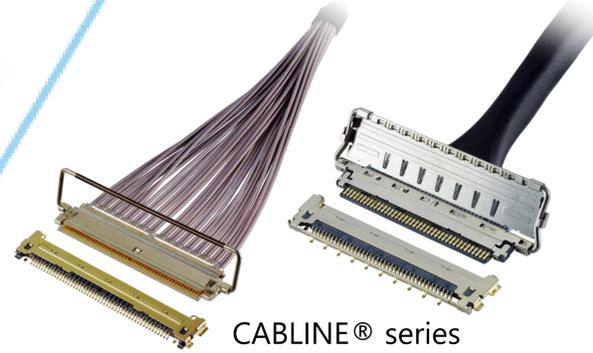

CABLINE® series

## Micro-Coaxial/Twinaxial Connectors



## Wire-to-Board Connectors/Terminals

AP series

ISH® series




NOVASTACK® series



## Board-to-Board Connectors



## I/O Connectors

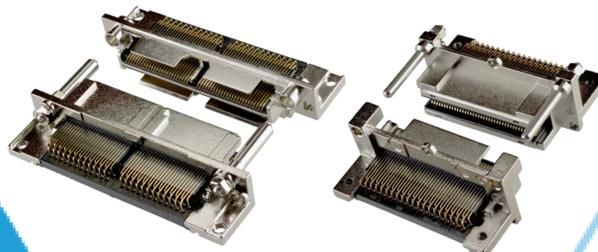

MINIDOCK™ series

MINIFLEX® series EVAFLEX® series



## FPC/FFC Connectors



Inquiry



I-PEX, MHF, CABLINE, NOVASTACK, ISH, IARPB, MINIFLEX, EVAFLEX, MINIDOCK, i-Fit and ZenShield are registered trademarks of I-PEX Inc. Please note that the contents in the catalog might be changed without prior notification. I-PEX Inc. assumes no responsibility for any inaccuracies or obligation to update information on these documents. Please be sure to read and understand the latest "Precautions for Use" and "Instruction Manual" before you use our products. We shall not be responsible for any defects, damages or troubles in case you use our products without following the precautions for use. Please feel free to contact our sales representatives when you use our products for any applications that require very high reliability and safety, or that relate to human life (ex. nuclear power control, aerospace, transportation, medical equipment, safety equipment etc.).

Contact your sales representative or more detailed information.

[www.i-pex.com](http://www.i-pex.com)



# I-PEX

© I-PEX Inc. 2026  
All rights reserved